

Poise

Ceramic Design



Wall (Left): DWGR 07 Rounded Matt
Wall (Right): DWGP 07 Flat Matt

7 Colours / 2 Finishes / 2 Sizes / 2 Formats

Poise is a range of ceramic wall tiles that express diversity in colour through the translucent crystalline deep glazes of the gloss finish and the smoothest functionality of the matt finish — both of which do not reflect any light. Available in two formats, flat and rounded, to help create impactful feature walls.



Wall: DWGR 03 Rounded Matt &
DWGR 03 Rounded Gloss



Wall: DWGR 04 Rounded Matt &
DWGR 04 Rounded Gloss



Wall: DWGP 06 Flat Matt & DWGP 06 Flat Gloss

Sizes




DWGP 01 Flat




DWGR 01 Rounded




DWGP 02 Flat



DWGR 02 Rounded



DWGP 03 Flat

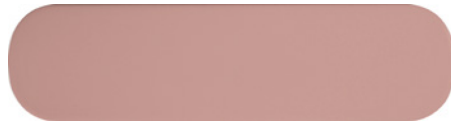

DWGR 03 Rounded



DWGP 04 Flat



DWGR 04 Rounded



DWGP 05 Flat



DWGR 05 Rounded




DWGP 06 Flat



DWGR 06 Rounded



DWGP 07 Flat

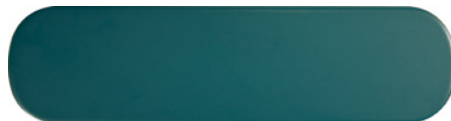

DWGR 07 Rounded

Flat




Rounded



	Size (mm)	Thickness	Finish	Colour Availability
1	Flat	8.5	Matt	All DWGP colours
	299.5 x 74.5 (N)		Gloss	All DWGP colours
2	Rounded	8.5	Matt	All DWGR colours
	299 x 74 (N)		Gloss	All DWGR colours

(N) Nominal size - pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested.



Poise

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DWGP / DWGR

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 12 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 600 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	< 7 x 10 ⁻⁶ / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes		A1
Recycled content			62%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. December 2021

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com