

Fringe

Porcelain Design



Floor: DMFN 03 & 08 Matt

10 Colours / 1 Finish / 1 Size


Fringe—an ornamental border made of threads or strips—is a porcelain tile range divided into a series of parallel segments of two widths directly engraved onto the surface. The pronounced grout spacing forms a 'brick-like' design that can be woven into multiple patterns through orientation changes.

Design Michael Anastassiades


Mutina



Wall & Floor: DMFN 01 & 06 Matt

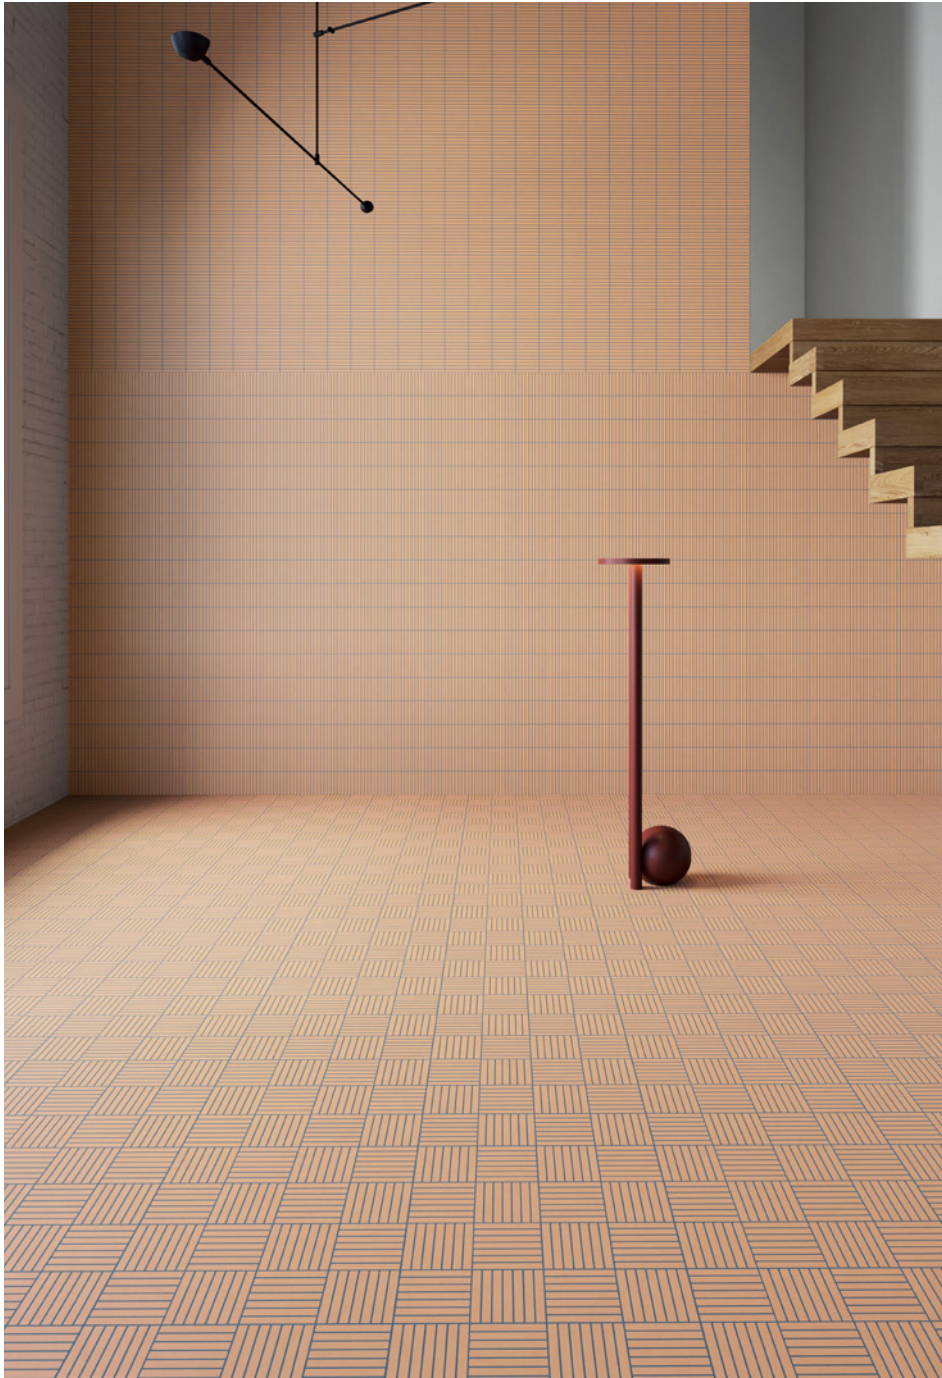

Wall & Floor: DMFN 02 Matt

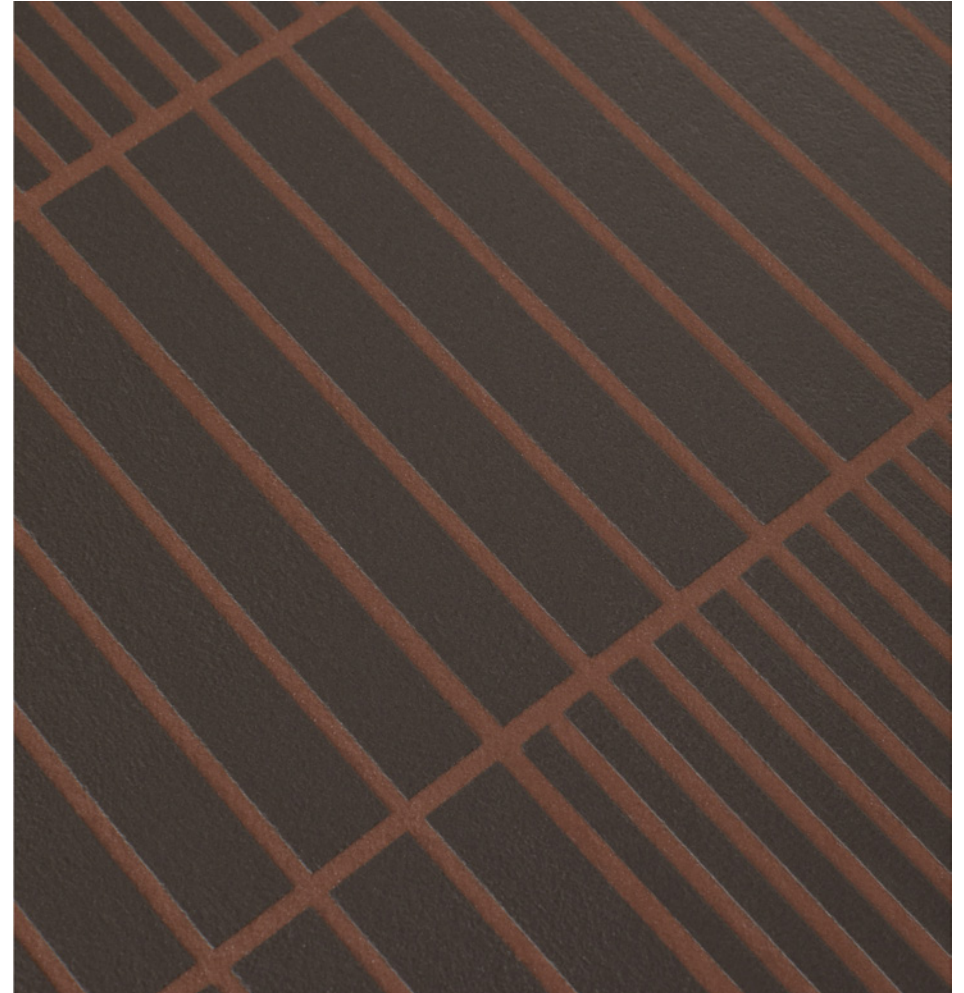


Floor: DMFN 05 & 10 Matt



DMFN 01




DMFN 02




DMFN 03



DMFN 06




DMFN 07



DMFN 08



DMFN 04



DMFN 05




DMFN 09




DMFN 10

Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	123 x 123 (R)	12	Matt	All colours

(R) Rectified size - squared edge with bevel. Swatch colours may vary from original. Samples should be requested.



Fringe

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMFN

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.9mm	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Matt
Areas with bare feet	DIN 51097	B over 18° to 24°	Matt
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.06% (Typical Value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com