

# Grade

*Ceramic Design*



Wall: DWOD 04 Gloss

**5 Colours / 2 Finishes / 1 Size / 1 Décor**

A considered ceramic wall tile range of vivid glazed solid colours with subtle tonal variation. The gloss or matt surface has a deep rich glaze and soft undulating surface. Combine with matching mixed patterned and textured décors, which have greater colour variation, to create attractive and intriguing wall features.



Wall: DWOM 01 Mixed Textures Décor Gloss




Wall: DWOD 05 Matt




Wall: DWOD 02 Matt



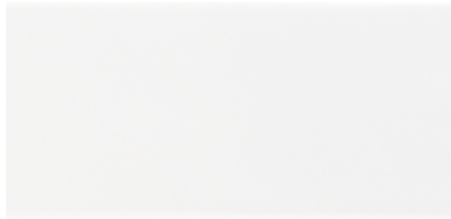

DWOD 01

Matt

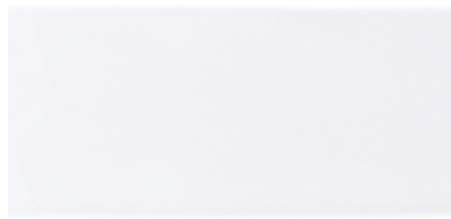

DWOD 01

Gloss




DWOD 02

Matt




DWOD 02

Gloss

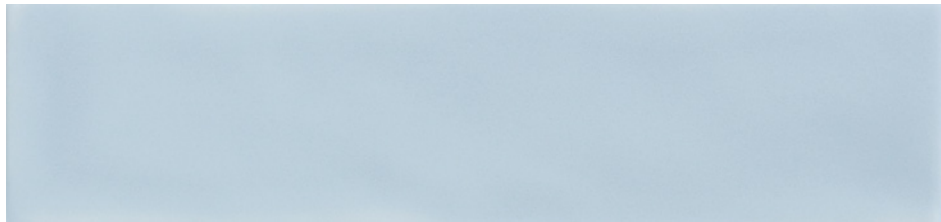


DWOD 03

Matt

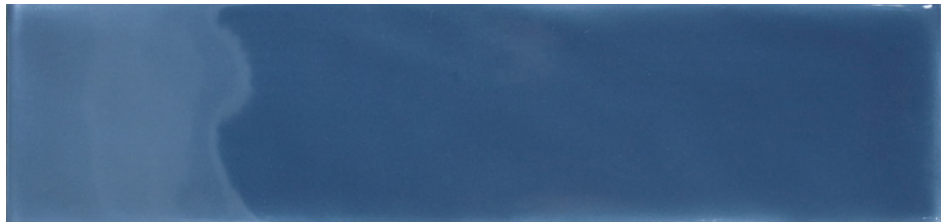

DWOD 04

Gloss

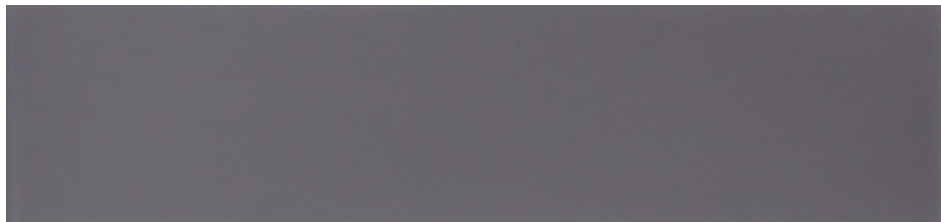

DWOD 05


Matt


# Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	300 x 75 (N)	9.5	Matt Gloss	DWOD 01, 02, 03 & 05 DWOD 01, 02 & 04

(N) Nominal size - pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested. Décors shown on next page.



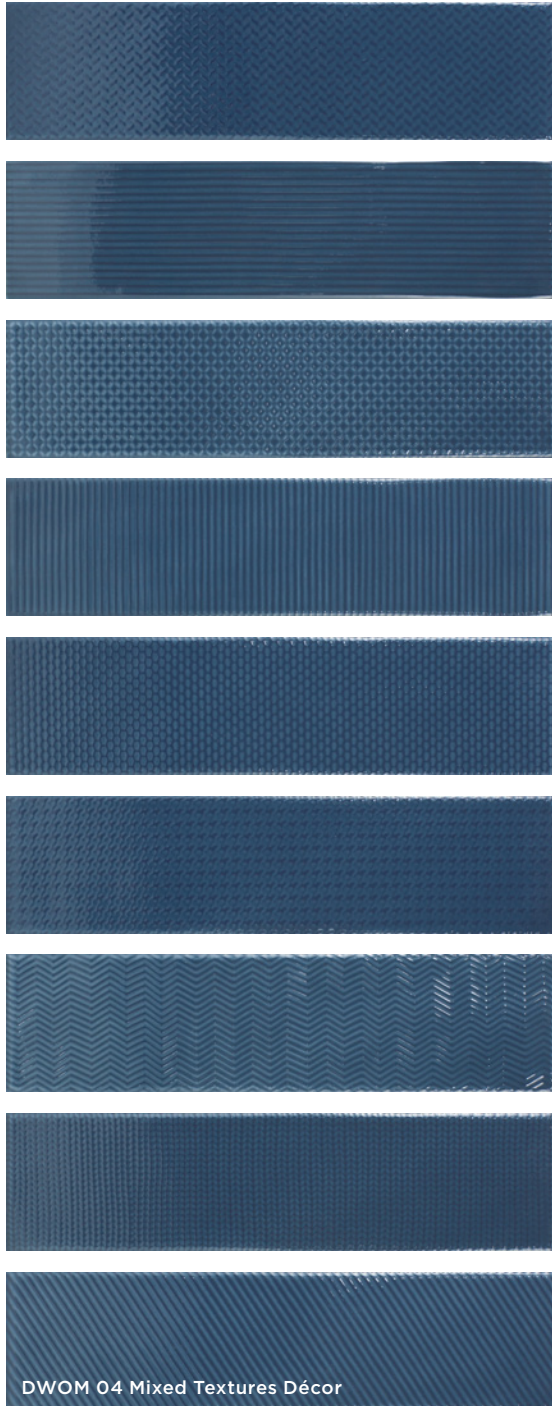


DWOM 04 Mixed Textures Décor

# Décors



	Size (mm)	Thickness	Finish	Colour Availability
1	Mixed Textures Décor 300 x 75 (N)	9.5	Matt Gloss	DWOD 01, 02, 03 & 05 DWOD 01, 02 & 04

(N) Nominal size - pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested. Images on the left are of DWOM 04 only.



# Grade

Technical Data

**Product Type:** Glazed Ceramic (BS EN 14411 – Group BIII)

**Use:** Walls (Internal only)

**Product Code:** DWOD / DWOM

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤ <i>N</i> < 150mm	<i>N</i> ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2		> 95%	Conforms

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 7 x 10 <sup>-6</sup> / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			62%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. October 2021

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com