

Otta

Porcelain Concrete



6 Colours / 2 Finishes / 7 Sizes

Inspired by pure Italian Sassi cement, the Otta porcelain tiles stand out due to their oxide inlays and the subtle shine that bestow the characteristic industrial look of cement. Refer to Otta Wall for ceramic wall tiles.





Splashback & Partition Wall: DAGF 05 Matt
Counter Sides & Floor: DAGF 04 Matt




Wall & Floor: DAGF 04 Matt



DAGF 01



DAGF 02

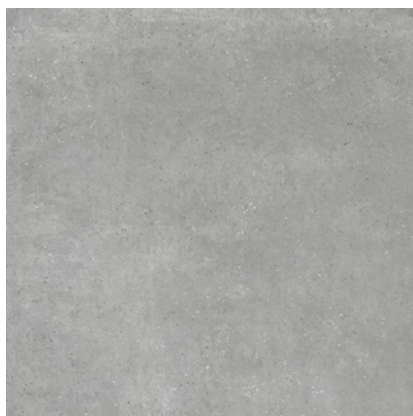

DAGF 04



DAGF 03




DAGF 05



DAGF 06

Sizes

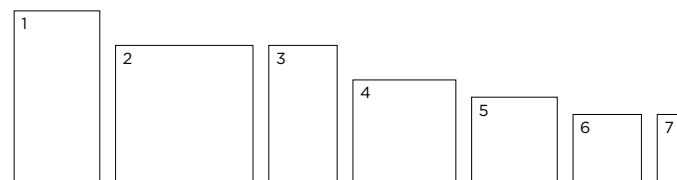

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|-----------------|-----------|-------------------|----------------------------|
| 1 | 1500 x 750 (R) | 9 | Matt | All colours |
| 2 | 1200 x 1200 (R) | 9 | Matt | All colours |
| 3 | 1200 x 600 (R) | 9 | Matt Anti-Slip | All colours All colours |
| 4 | 900 x 900 (R) | 9 | Matt | All colours |
| 5 | 750 x 750 (R) | 9 | Matt | All colours |
| 6 | 600 x 600 (R) | 9 | Matt Anti-Slip | All colours All colours |
| 7 | 600 x 298 (R) | 9 | Matt | All colours |

(R) Rectified size - square edge with bevel. Special pieces shown on next page.
Swatch colours may vary from original. Samples should be requested.

Special Pieces



Floor: DAGF 01 Matt



Floor: DAGF 01 Matt

| Size (mm) | Thickness | Finish | Colour Availability |
|-----------|-----------|--------|---------------------|
|-----------|-----------|--------|---------------------|

Skirting

| | | | |
|-----------|---|------|-------------|
| 1500 x 90 | 9 | Matt | All colours |
| 1200 x 90 | 9 | Matt | All colours |
| 900 x 90 | 9 | Matt | All colours |
| 750 x 90 | 9 | Matt | All colours |
| 600 x 90 | 9 | Matt | All colours |

Bullnose Step Tread

| | | | |
|------------|---|------|-------------|
| 1500 x 300 | 9 | Matt | All colours |
| 1200 x 300 | 9 | Matt | All colours |
| 900 x 300 | 9 | Matt | All colours |
| 750 x 300 | 9 | Matt | All colours |
| 600 x 300 | 9 | Matt | All colours |

Step Tread

| | | | |
|------------|---|------|-------------|
| 1200 x 300 | 9 | Matt | All colours |
| 900 x 300 | 9 | Matt | All colours |
| 750 x 300 | 9 | Matt | All colours |
| 600 x 300 | 9 | Matt | All colours |

Swatch colours may vary from original. Samples should be requested.

Otta

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DAGF

DIMENSION & SURFACE QUALITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width | BS EN ISO 10545-2 | ± 0.60% (max. ± 2.0mm) | Conforms |
| Thickness | BS EN ISO 10545-2 | ± 5% (max. ± 0.5mm) | Conforms |
| Edge straightness | BS EN ISO 10545-2 | ± 0.50% (max. ± 1.5mm) | Conforms |
| Orthogonality (squareness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | Conforms |
| Planarity (flatness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | Conforms |
| Appearance | BS EN ISO 10545-2 | > 95% | Conforms |

SLIP RESISTANCE

| Technical Characteristics | Industry Standards | Requirement | Finish |
|--|--------------------------------|--|-------------------|
| Areas with footwear | BS EN ISO 10545-17 (DIN 51130) | R10 from 10° to 19° R11 from 19° to 27° | Matt Anti-Slip |
| Slip resistance Coefficient of friction | BS 7976-2 BS EN 16165 | Test results upon request | |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|---|---|-----------------------------------|--|
| Water absorption | BS EN ISO 10545-3 | ≤ 0.5% | Conforms |
| Modulus of rupture (bending strength) | BS EN ISO 10545-4 | ≥ 35 N/mm ² | Conforms |
| Breaking strength | BS EN ISO 10545-4 | ≥ 1300 N | Conforms |
| Resistance to surface abrasion (glazed tiles) | BS EN ISO 10545-7 | PEI *see classifications below | Class 4 – DAGF 01, 02 & 04 Class 3 – DAGF 03, 05 & 06 |
| Thermal shock resistance | BS EN ISO 10545-9 | No visible defects | Resistant |
| Crazing resistance | BS EN ISO 10545-11 | No visible signs | Resistant |
| Frost resistance | BS EN ISO 10545-12 | No surface alteration | Resistant |
| Chemical resistance: Low concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | GLB min. |
| High concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | GHB min. |
| Domestic chemicals & additives for swimming pools | BS EN ISO 10545-13 | GB min. | Conforms |
| Stain resistance | BS EN ISO 10545-14 | Min. Class 3 | Conforms |
| Reaction to fire | Based on the decision 96/603/EC and its changes | | A1 _{FL} /A1 |
| Recycled content | | | 16% |

*PEI classifications

- PEI 1 – Very light traffic
- PEI 2 – Light traffic
- PEI 3 – Light to moderate traffic
- PEI 4 – Moderate to heavy traffic
- PEI 5 – Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. January 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com