

Rock Salt Magnum

Lightweight Slabs / Porcelain Stone



Floor: DMAG 136 Shiny

4 Colours / 2 Finishes / 3 Sizes / 2 Mosaics

Rock Salt Magnum offers four different chromatic variations enriched with desaturated, deep and defined veining. Fresh shades are accompanied by warmer tones, returning the allure of the lustre or tactile materiality of natural crystals, depending on their finish.




Floor: DMAG 133 Shiny

Sizes



DMAG 133

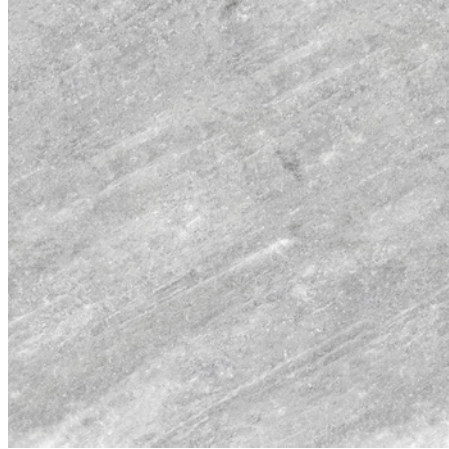


DMAG 134



DMAG 135




DMAG 136

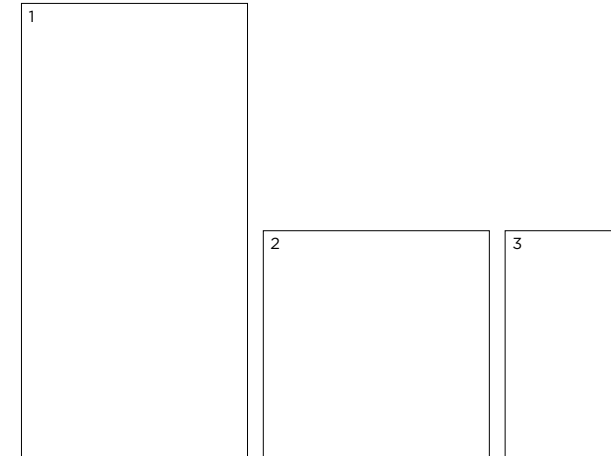

	Size (mm)	Thickness	Finish	Colour Availability
1	2397 x 1197 (R)	6	Natural Shiny	All colours
2	1197 x 1197 (R)	6	Natural Shiny	All colours
3	1197 x 597 (R)	6	Natural Shiny	All colours
	Plinth Skirting 597 x 46 (R)	6	Natural Shiny	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Mosaics shown on next page.

Mosaic



DMAG 133



DMAG 134



DMAG 135



DMAG 136

Muretto Mosaic



DMAG 133



DMAG 134



DMAG 135




DMAG 136




Floor: DMAG 135 Natural

Mosaics

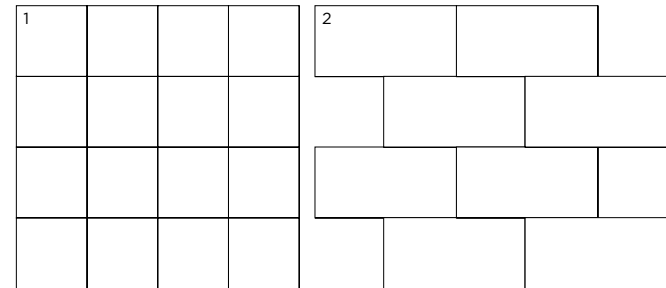

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 72 x 72 on 297 x 297 sheet	6	Natural Shiny	All colours
2	Muretto Mosaic 147 x 72 on 297 x 297 sheet	6	Natural Shiny	All colours

Swatch colours may vary from original. Samples should be requested.



Rock Salt Magnum

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 - Group BIa)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 0.5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.20%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.10%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.20%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Natural
Areas with bare feet	DIN 51097	B over 18° to 24°	Natural
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	< 7.5mm ≥ 700 N	1350 N (typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4 (DMAG 134, 135, 136) Class 5 (DMAG 133)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA (Natural) GLB (Shiny)
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 - glazed Declared value - unglazed	Class 4 (Shiny) Class 4-5 (Natural)
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20.5%

*PEI classifications

PEI 1 - Very light traffic

PEI 2 - Light traffic

PEI 3 - Light to moderate traffic

PEI 4 - Moderate to heavy traffic

PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com