

Match-Up Magnum

Lightweight Slabs / Porcelain Stone



Floor: DMAG 200 Mix Glossy

6 Colours / 3 Finishes / 4 Sizes / 2 Mosaics / 2 Décor

Match-Up Magnum consists of two basic surfaces: a stone effect with an urban and industrial aesthetic and an original marble agglomerate effect. Includes an array of mosaic and décor options to choose from. It can be paired with Match-Up and Match-Up 20mm.

Wall: DMAG 196 Comfort PTV





Wall: DMAG Waves Décor Natural



Wall: DMAG 201 Mix Glossy



Wall: DMAG Tropico Décor Natural



Wall: DMAG 197 Comfort PTV
Floor: DMAG 200 Mix Glossy



DMAG 196



DMAG 199 Mix



DMAG 197



DMAG 200 Mix




DMAG 198



DMAG 201 Mix

Sizes

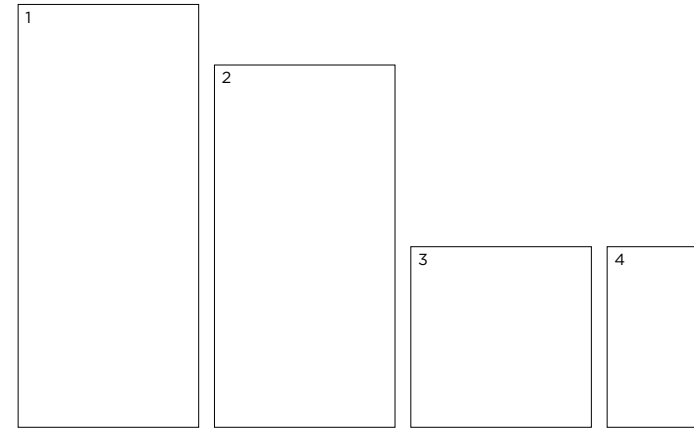


	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Comfort PTV	All colours
2	2397 x 1197 (R)	6	Comfort PTV Glossy	All colours DMAG 199 Mix, 200 Mix & 201 Mix
3	1197 x 1197 (R)	6	Comfort PTV Glossy	All colours DMAG 199 Mix, 200 Mix & 201 Mix
4	1197 x 597 (R)	6	Comfort PTV Glossy	All colours DMAG 199 Mix, 200 Mix & 201 Mix
	Skirting 597 x 46 (R)	6	Comfort PTV Glossy	All colours DMAG 199 Mix, 200 Mix & 201 Mix

(R) Rectified size - square edge with bevel. Mosaics and décors shown on next page.
Swatch colours may vary from original. Samples should be requested.



Mosaic 75 x 75mm

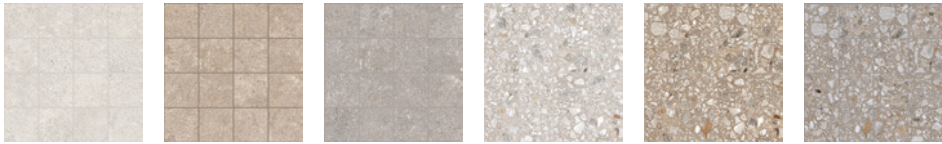

DMAG 196 DMAG 197 DMAG 198 DMAG 199 Mix DMAG 200 Mix DMAG 201 Mix

Muretto Mosaic 147 x 75mm




DMAG 196 DMAG 197 DMAG 198 DMAG 199 Mix DMAG 200 Mix DMAG 201 Mix

Décors




DMAG Tropicó Décor

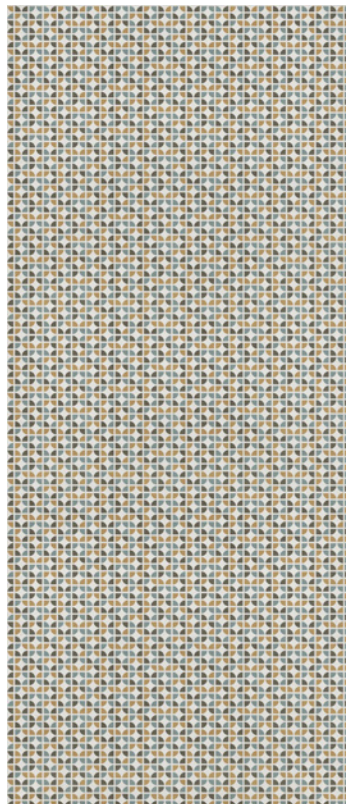

DMAG Waves Décor

Mosaics & Décors

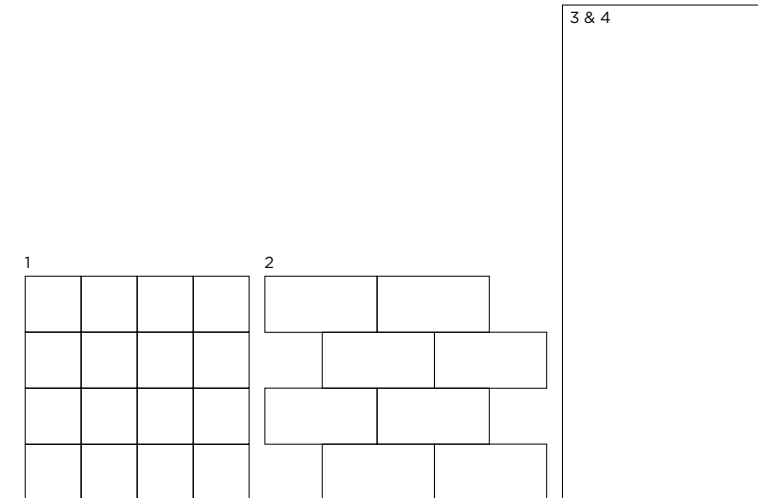

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 75 x 75 on 297 x 297 sheet	6	Comfort PTV Glossy	All colours
2	Muretto Mosaic 147 x 75 on 297 x 297 sheet	6	Comfort PTV Glossy	All colours
3	Tropicó Décor 2797 x 1197 (R)	6	Natural	As shown
4	Waves Décor 2797 x 1197 (R)	6	Natural	As shown

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Line drawings not to scale.



DOMUS

V2 - Moderate Shade Variation



DMAG 196 Comfort PTV




DMAG 197 Comfort PTV




DMAG 198 Comfort PTV


V3 - High Shade Variation

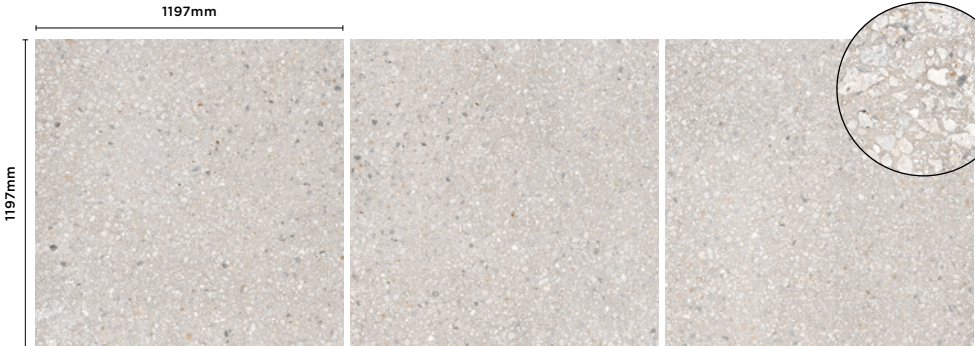

DMAG 199 Mix Comfort PTV

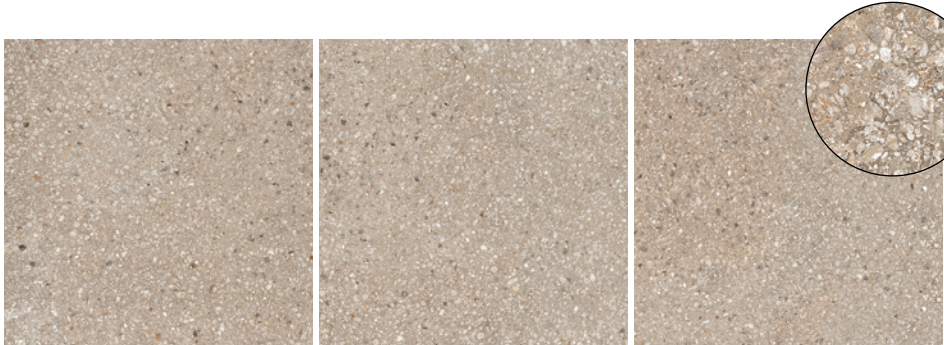

DMAG 200 Mix Comfort PTV

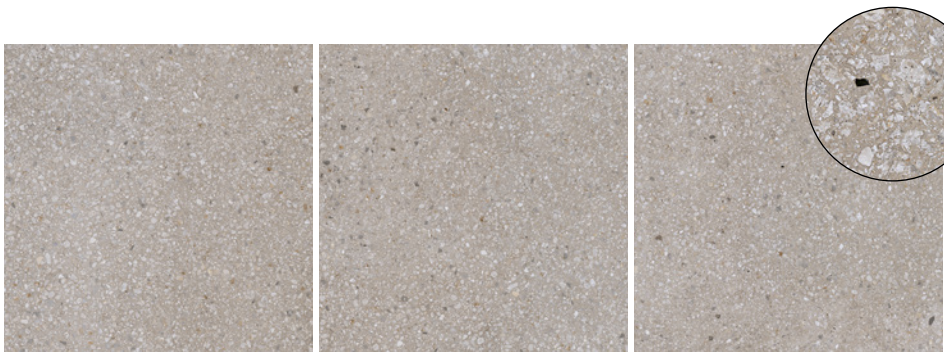

DMAG 201 Mix Comfort PTV

Match-Up Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Comfort PTV
Areas with bare feet	DIN 51097	B over 18° to 24°	Comfort PTV
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA – Comfort PTV ULA-ULB - Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4-5 - Glossy Class 5 - Comfort PTV
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			DMAG 196 & 198 – 20.5% DMAG 197, 198, 200 & 201 – 16%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale, March 2023