

Mode











Porcelain Minimal




7 Colours / 2 Finishes / 4 Sizes / 2 Mosaics

Mode is a porcelain tile range with a subtle aesthetic and moderate tonal variation. Available in modular sizes to suit specifications both commercial and residential. Includes a relief surface finish that is suitable for high-traffic areas.



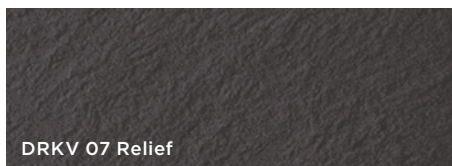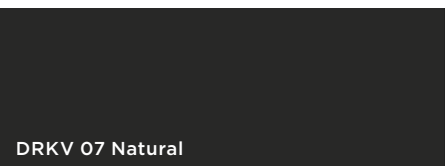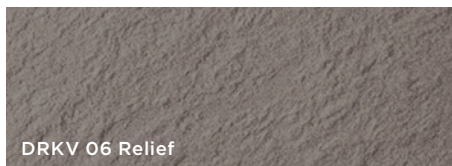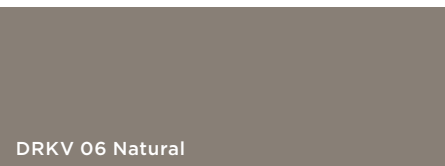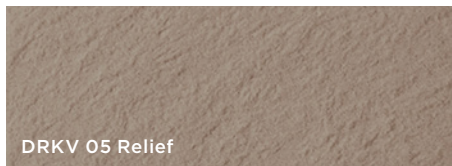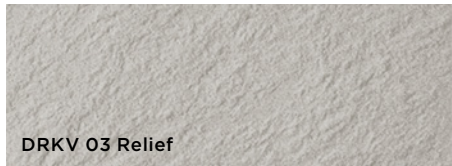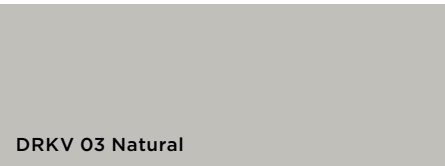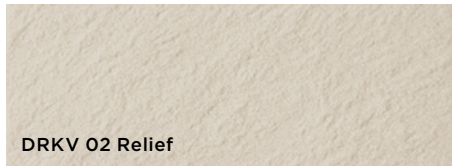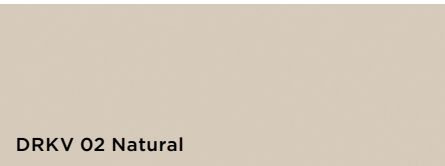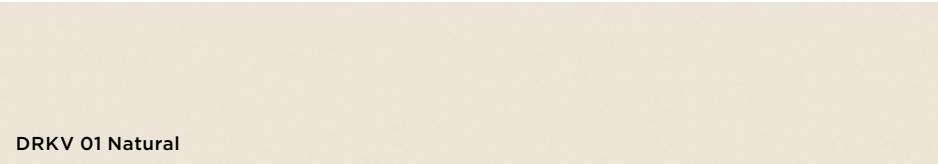

Sizes

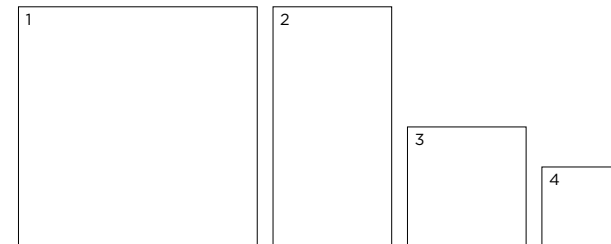

	Size (mm)	Thickness	Finish	Colour Availability
1	598 x 598 (R)	10	Natural	All colours
2	598 x 298 (R)	10	Natural Relief (SRU)	All colours DRKV 02-07
3	298 x 298 (R)	9	Natural Relief (SR7)	All colours DRKV 02-07
4	198 x 198 (R)	9	Natural	All colours


(R) Rectified size – square edge with bevel. Mosaics shown on next page.
 Swatch colours may vary from original. Samples should be requested.
 Relief finishes vary between sizes – 598 x 298 x 10mm: Moderate Relief (SRU) and
 298 x 298 x 9mm: High Relief (SR7, pictured).

V2 - Moderate
Shade Variation

DOMUS

Mosaics


Mosaic 48 x 48mm




DRKV 01




DRKV 02




DRKV 03




DRKV 04



DRKV 05



DRKV 06




DRKV 07


Floor Mosaic 98 x 98mm




DRKV 01




DRKV 02




DRKV 03




DRKV 04




DRKV 05



DRKV 06




DRKV 07

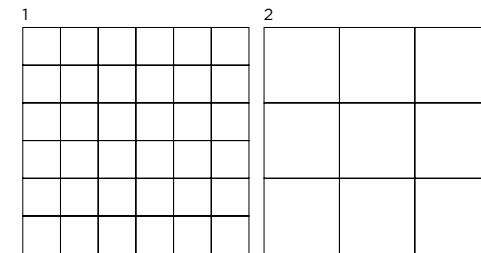


	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 48 x 48 on 298 x 298 sheet	10	Natural	All colours
2	Floor Mosaic 98 x 98 on 298 x 298 tile	9	Natural	All colours


Swatch colours may vary from original. Samples should be requested.
Special pieces shown on next page.
Floor Mosaic is a 298 x 298mm tile with 98 x 98mm pre-incised cuts.




Special Pieces

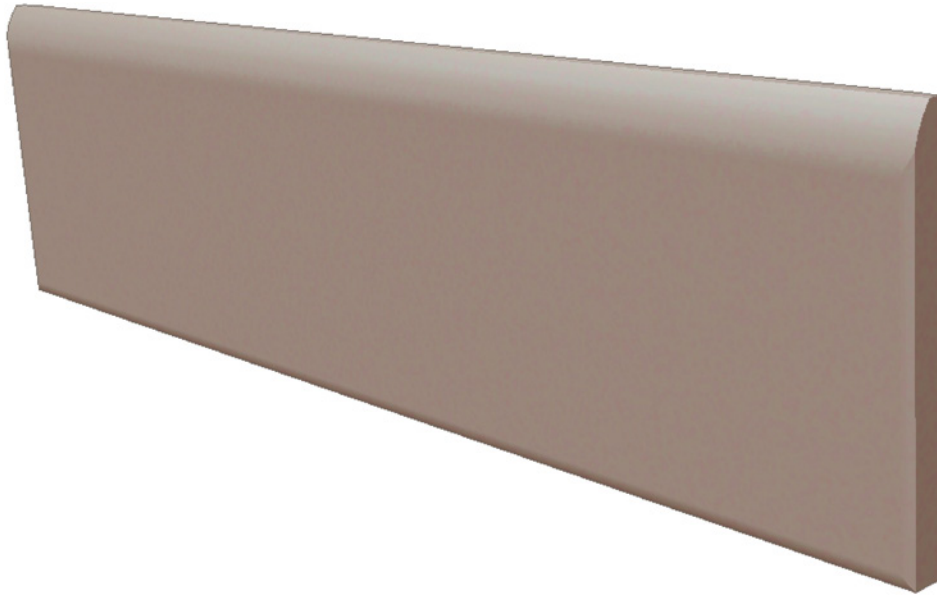

Skirting 598 x 95 x 10mm



Step Tread 598 x 298 x 10mm



	Size (mm)	Thickness	Finish	Colour Availability
1	Skirting 598 x 95 (R)	10	Natural	All colours
2	Step Tread 598 x 298 (R)	10	Natural	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.

All special pieces shown in DRKV 05 colour

V2 - Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Mode

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DRKV

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27°	Natural Relief SRU & Natural in size 198x198mm only Relief SR7
Areas with bare feet	DIN 51097	A over 12° to 18° B over 18° to 24°	Natural Relief SRU & Relief SR7
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.3% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 40 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 1500 N (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	≤ 135 mm ³ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 3 min.
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			0%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2021

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com