

Kovo

Porcelain Concrete



Wall & Floor: DLBK 01 Soft Textured

2 Colours / 2 Finishes / 6 Sizes / 4 Mosaics

The essence of Kovo is inspired by the most refined cement finishes. Fine graphic detailing and a cool colour palette help create a gentle, homogeneous appearance. Refer to Kovo Slim for the exceptional 2.7 x 1.2m format in 6mm thickness.



Floor: DLBK 02 Soft Textured


Sizes



DLBK 01




DLBK 02

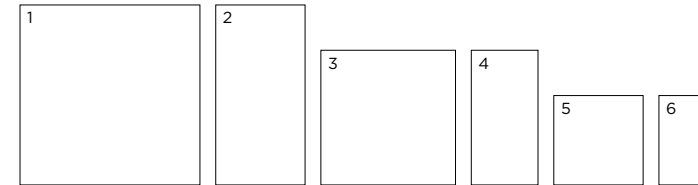

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9	Soft Textured Natural Grip	All colours All colours
2	1198 x 598 (R)	9	Soft Textured Natural Grip	All colours All colours
3	898 x 898 (R)	9	Soft Textured Natural Grip	All colours All colours
4	898 x 448 (R)	9	Soft Textured Natural Grip	All colours All colours
5	598 x 598 (R)	9	Soft Textured Natural Grip	All colours All colours
6	598 x 298 (R)	9	Soft Textured Natural Grip	All colours All colours

(R) Rectified size – squared edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.


Mosaic 25 x 25mm

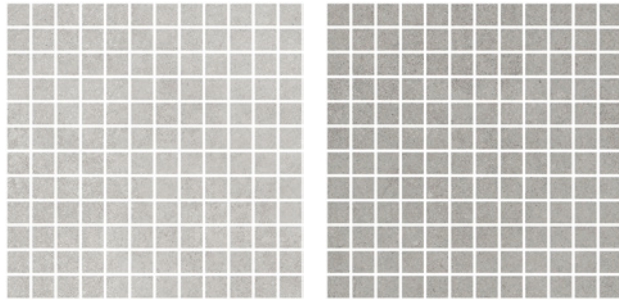

Mosaic 50 x 50mm



Moved Mosaic

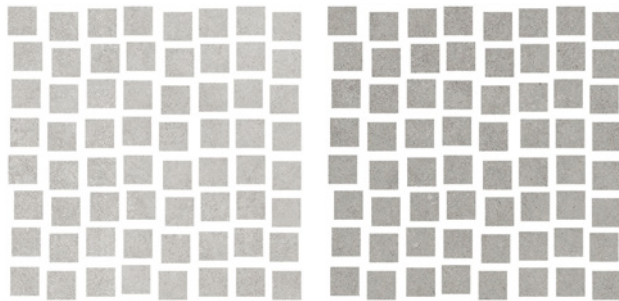


Muretto Mosaic



DLBK 01

DLBK 02


Mosaics & Special Pieces

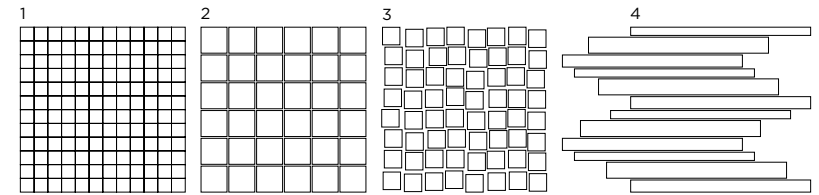

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
2	Mosaic 50 x 50 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
3	Moved Mosaic 30 x 30 on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
4	Muretto Mosaic on 298 x 298 sheet	9	Soft Textured Natural Grip	All colours All colours
	Skirting 1198 x 48 (R) 898 x 48 (R) 598 x 48 (R)	9	Soft Textured Natural Grip	All colours All colours
	Step Tread 1198 x 333 (R) 898 x 333 (R) 598 x 333 (R)	30	Soft Textured Natural Grip	All colours All colours
	Angle Step Tread 1198 x 333 (R) 898 x 333 (R) 598 x 333 (R)	30	Soft Textured Natural Grip	All colours All colours

(R) Rectified size - squared edge with bevel.

Swatch colours may vary from original. Samples should be requested.




DOMUS


V2 - Moderate Shade Variation




DLBK 01 Soft Textured

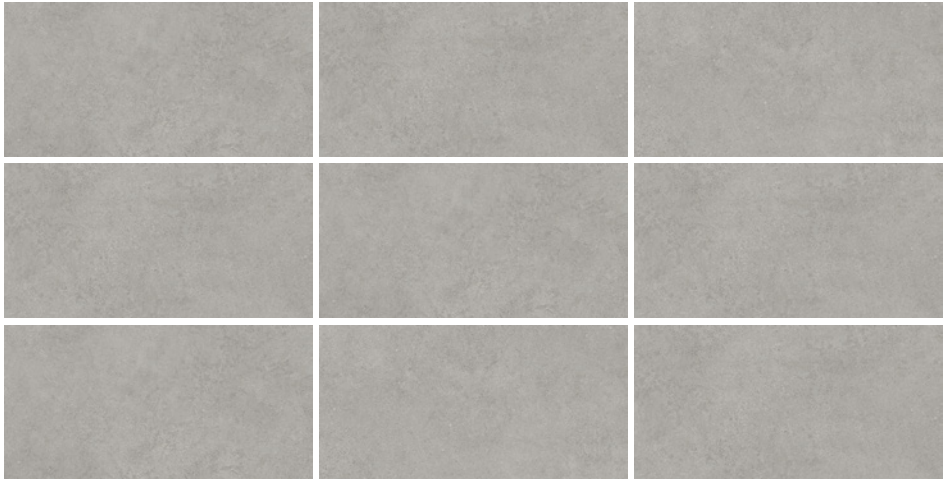

DLBK 02 Soft Textured

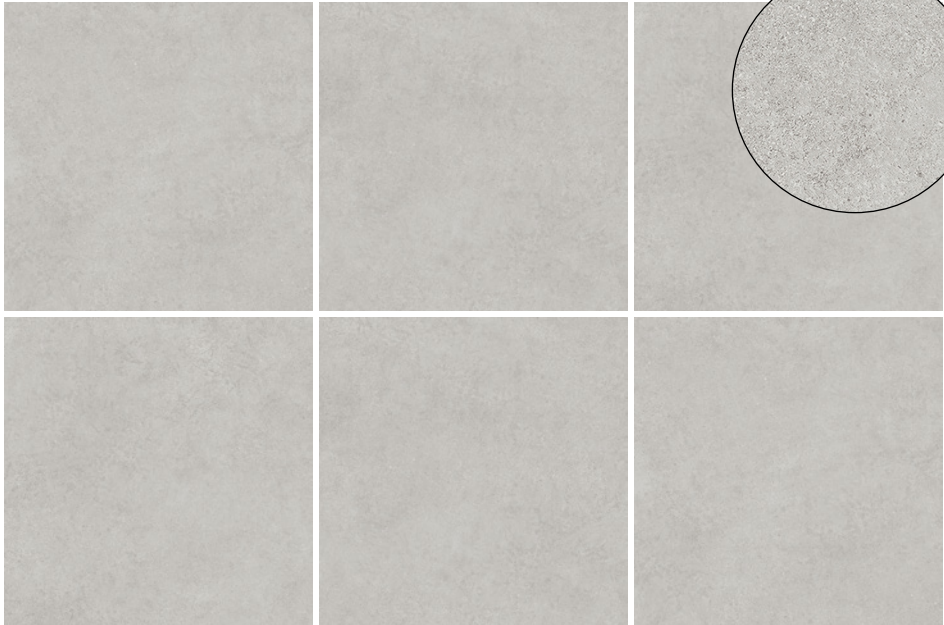

DLBK 01 Soft Textured

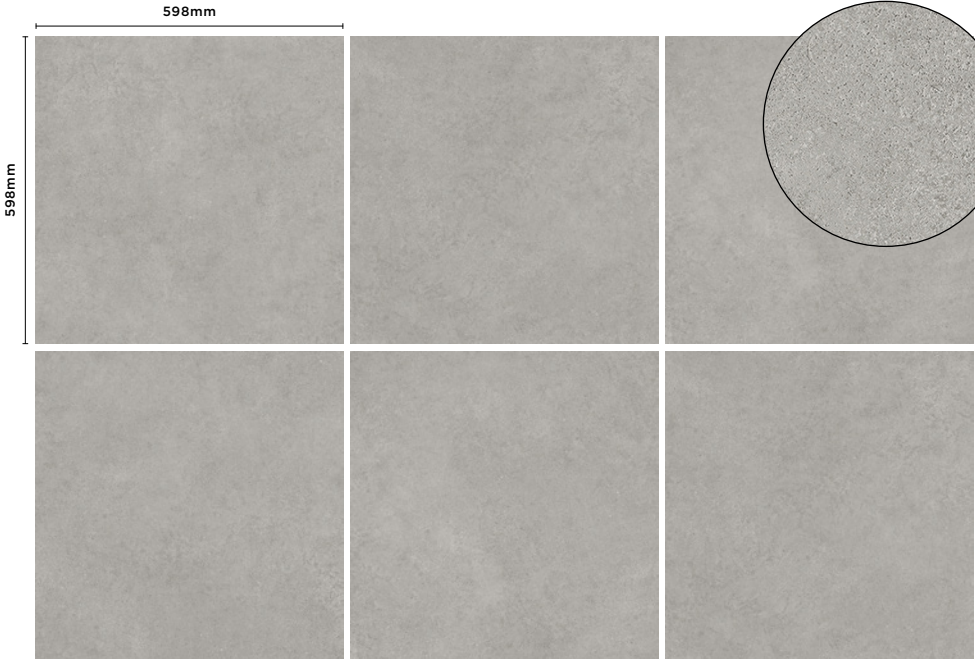

DLBK 02 Soft Textured

Kovo

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DLBK

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Natural Natural Grip
Areas with bare feet	DIN 51097	A over 12° to 18° C over 24°	Natural Natural Grip
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 52 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 2500 N (Typical value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	Class 4 - DLBK 01 & 02
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			30%

*PEI classifications
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. January 2024

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com