

# Abiquiu


*Ceramic Colours*



**12 Colours / 1 Finish / 1 Size**

Abiquiu is a ceramic wall tile range with a glazed cracquele finish recommended for use on internal walls. Taking inspiration from Farrow & Ball colours, the palette evokes the natural hues found in New Mexico and the paintings of American artist Georgia O'Keeffe. This range can be paired with Abiquiu Design.



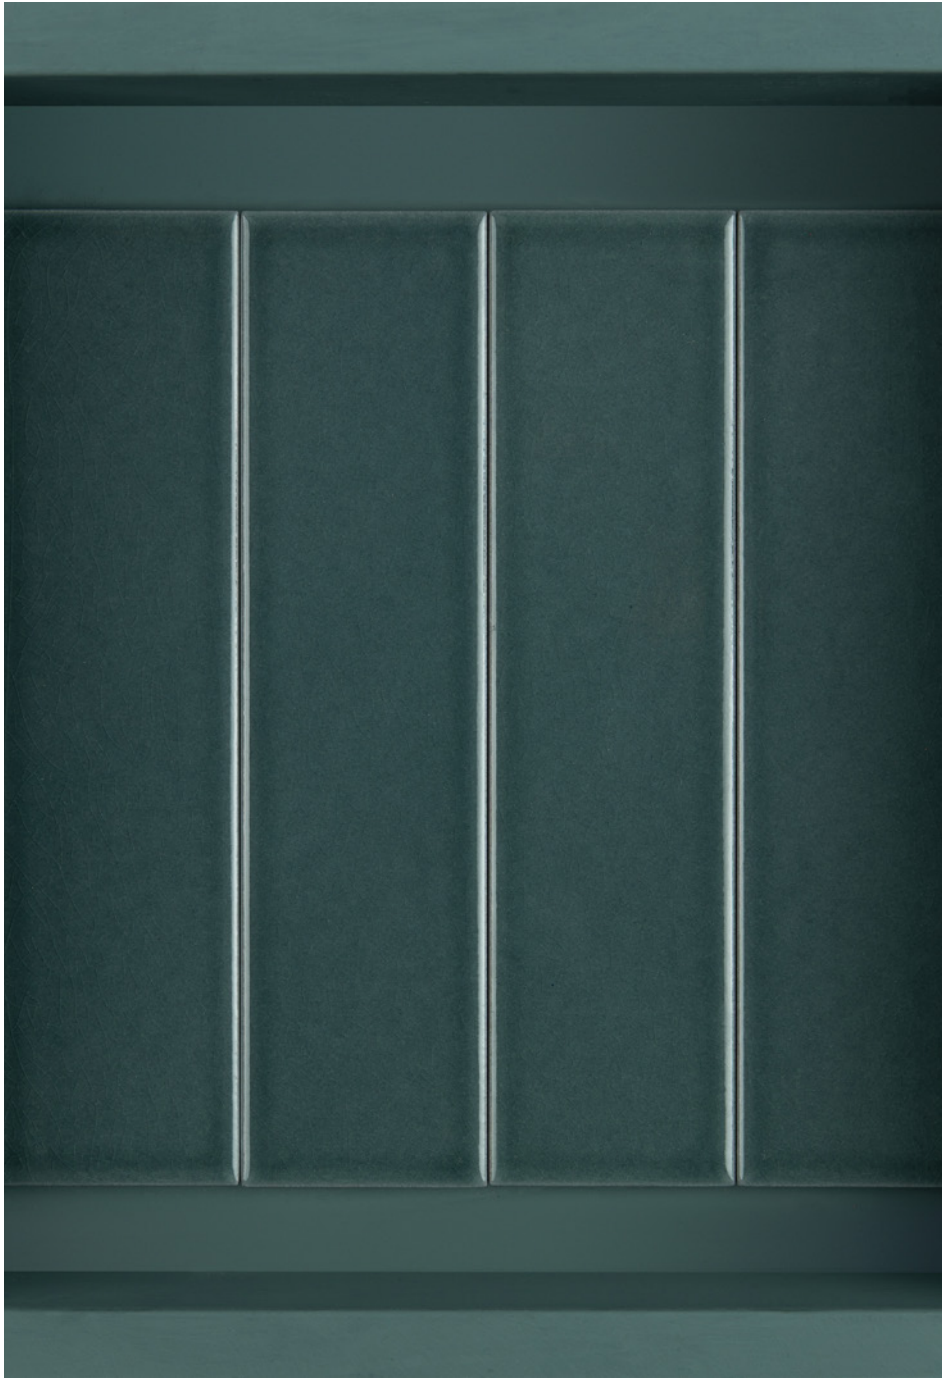

DCAB 08 Cracquele Glazed



DCAB 09 Cracquele Glazed



# Sizes



DCAB 01



DCAB 12



DCAB 03



DCAB 02



DCAB 06




DCAB 04



DCAB 07



DCAB 05

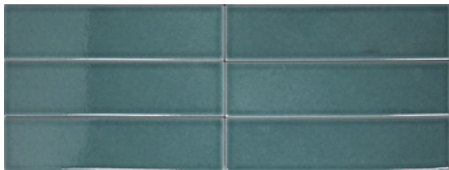

DCAB 08




DCAB 10



DCAB 09



DCAB 11



	Size (mm)	Thickness	Finish	Colour Availability
1	200 x 50 (N)	7	Cracquele Glazed	All colours

(N) Nominal size - pressed edge. For wall use only.  
Swatch colours may vary from original. Samples should be requested.

V1 - Low  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Abiquiu

Technical Data

**Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)**

**Use: Walls (Internal only)**

**Product Code: DCAB**

**Note : these tiles have a craquelé glaze and will require sealing with e.g. FILA MP90 Eco Xtreme prior to grouting**

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.75mm (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm (max. ± 2.0mm)	Conforms

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	14.6% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	< 7.5mm thick ≥ 15 N/mm <sup>2</sup>	20 N/mm <sup>2</sup> (Typical value)
Breaking strength	BS EN ISO 10545-4	< 7.5mm thick ≥ 200 N	1093 N (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 1
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			Min. 39%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2020

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com