

Domus Wood 192

Engineered Wood



Floor: WDOP 056 Wax, Matt UV Lacquer

24 Colours / 4 Finishes / 1 Size

Domus Wood 192 is an exclusive and premium range of Engineered Wood from Domus, in a unique 192mm-width format—designed and manufactured in our state-of-the-art factory in Ravenna, Italy. Incorporating a 4mm European oak surface layer and a multi-layer birch plywood core, each harvested from responsibly managed forests with FSC® 100% accreditation.



















Floor: WDOP 819 Matt UV Lacquer



Floor: WDOP 059 Matt UV Lacquer




Floor: WDOP 003 Matt UV Lacquer

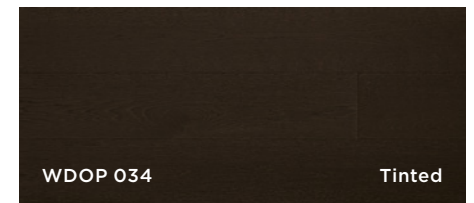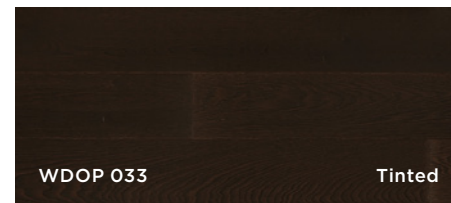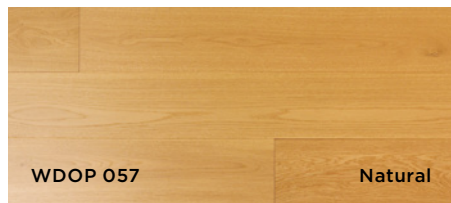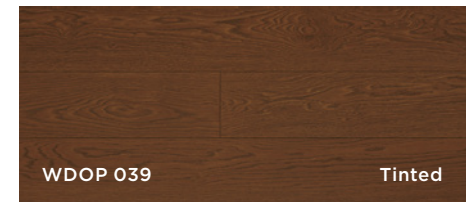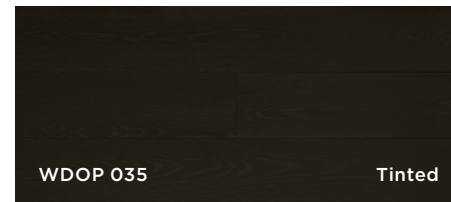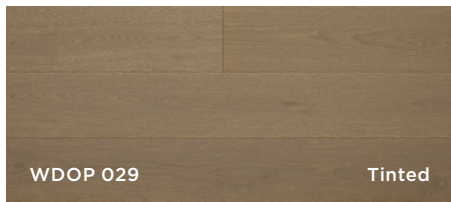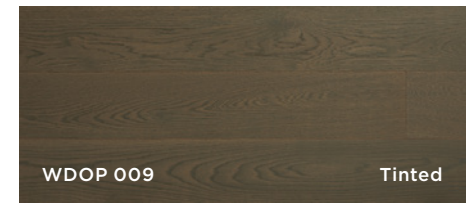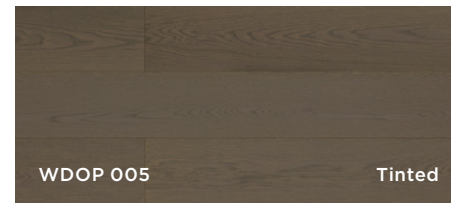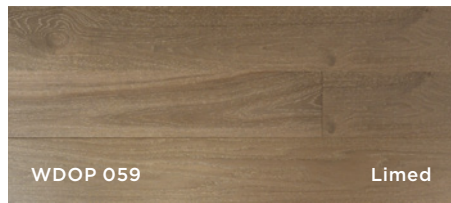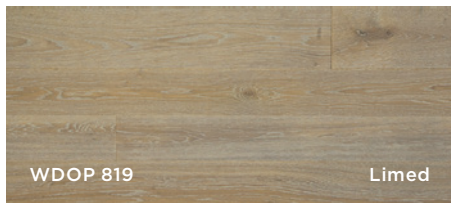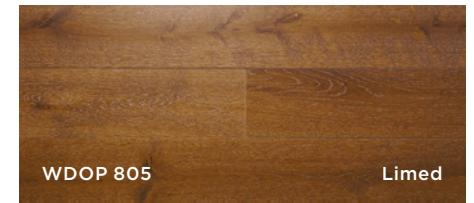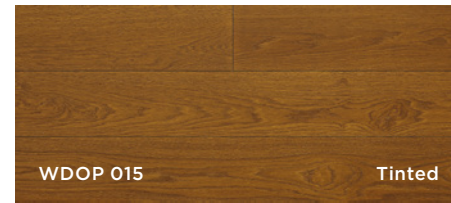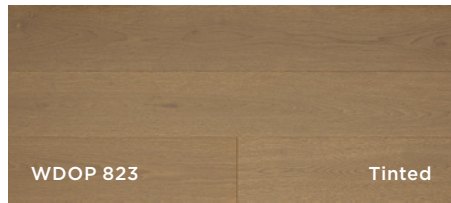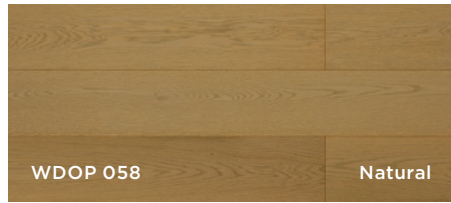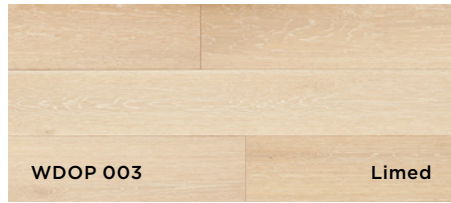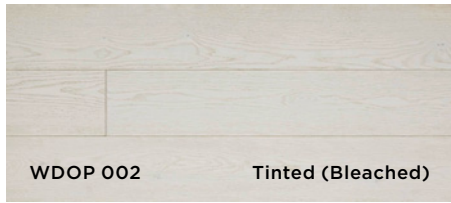

Product Data

Engineered Wood


Plank Format



Specification

Material:	European Oak (<i>Quercus robur</i>)	Grade:	Select
Finishes:	Wax, Matt UV Lacquer (WDOP 056-058) Natural Oiled Matt (WDOP 019) Water-Based Matt Lacquer (WDOP 035) Matt UV Lacquer (all other colours)	Certification:	FSC® 100%
Construction:	15mm (11mm engineered multi-layered birch base and 4mm oak surface layer). 4-way micro bevel. Tongue & groove all 4 sides.		
Application:	Internal use only. Suitable with underfloor heating.		
Installation:	Recommended to be fully bonded.		
Treatment:	Tinted (WDOP 005, 009, 015, 018, 019, 029, 033-035, 039, 048 & 823) Tinted Bleached (WDOP 002, 011 & 021) Limed (WDOP 003, 059, 060, 804, 805 & 819) Natural (WDOP 056-058)		
Brushing:	D-Brushed (all colours) Sawn Plus (WDOP 002, 005, 009, 011, 015, 018, 019, 021, 029, 033-035, 039, 048, 056-058 & 823)		

Construction

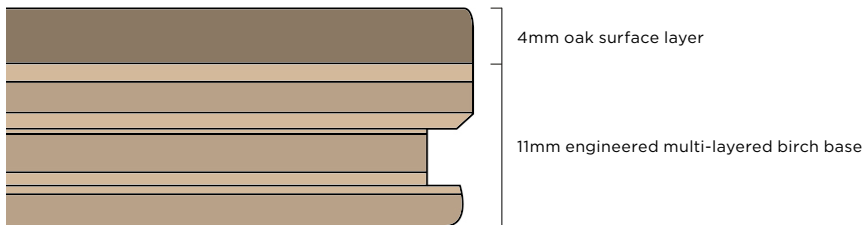

DOMUS
WOOD

service@domuswood.com | t: 020 8481 9500 | domuswood.com

Technical Data

Engineered Wood

Cleaning & Maintenance Specification:

ETC&M 03 (WDOP 019)
ETC&M 01 (all other colours)

PERFORMANCE & DURABILITY

Technical Characteristics	Industry Standard	Performance
Wood Species		Oak (<i>Quercus robur</i>)
Origin		Europe (FSC® 100%)
Reaction to Fire	UNI EN 14342 EN 13501-1	Dfl-S1
Formaldehyde Emission	UNI EN 14342 EN 717-1	E1 = 0.124mg/m³ air
Pentachlorophenol Emission	UNI EN 14342 CEN/TR 14823	< 5ppm
Thermal Conductivity	UNI EN 14342 EN ISO 10456-2007	0.10W/mK

NB: Compatible with underfloor heating systems - subject to K21 installation advice available on request.

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group Limited cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Limited Terms & Conditions of Sale, 3 July 2023

The mark of
responsible forestry
FSC® C124301

