

London East Quarter

Porcelain Terrazzo



Floor: DLEQ 03 Matt

4 Colours / **1** Finish / **3** Sizes

London East Quarter is an innovative porcelain tile range with contemporary colour options. With a refined granular terrazzo surface, this range is available in a smooth matt finish and large-format modular sizes.



Floor: DLEQ 02 Matt


Sizes




DLEQ 01




DLEQ 02

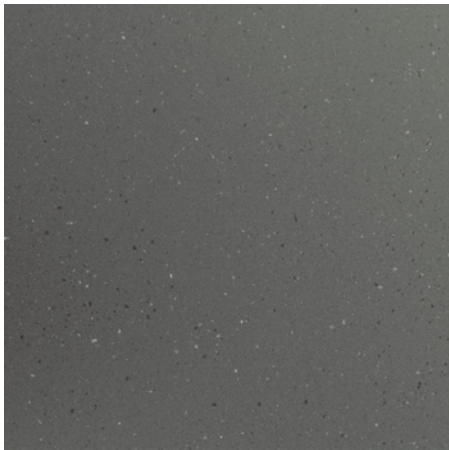

DLEQ 03

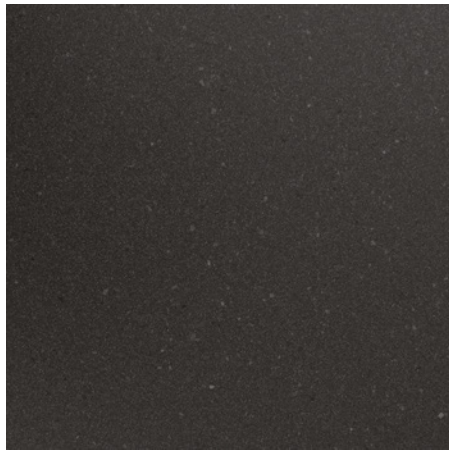

DLEQ 04

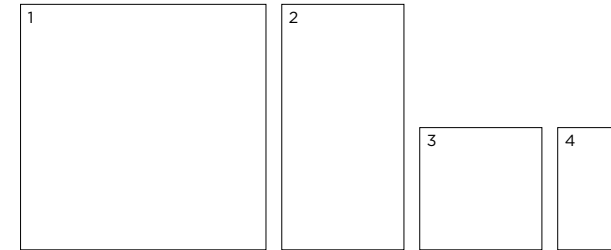

	Size (mm)	Thickness	Finish	Colour Availability
1	1190 x 1190 (R)	12	Matt	All colours
2	1190 x 594 (R)	12	Matt	All colours
3	594 x 594 (R)	12	Matt	All colours
4	594 x 296 (R)	12	Matt	All colours
	Skirting 1190 x 71	12	Matt	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.

London East Quarter

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DLEQ

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.2%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 3%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.2%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Matt
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.1% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 40 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 4000 N (Typical value)
Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm ³	≤ 145 mm ³ (Typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 7 × 10 ⁻⁶ / °C ⁻¹ (typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			41%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2019



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com