

Chalk

Ceramic Colours



Wall: DECY 09 Matt

10 Colours / 1 Finish / 1 Size

Chalk is a range of ceramic wall tiles in various chromatic colours that offer texture and warmth. Due to having a high variation rating, Chalk allows infinite vibrant and innovative combinations, creating aesthetically unique yet functional spaces.

Wall: DECY 05 Matt






Wall: DECY 02 Matt



Wall: DECY 02, 04 & 05 Matt

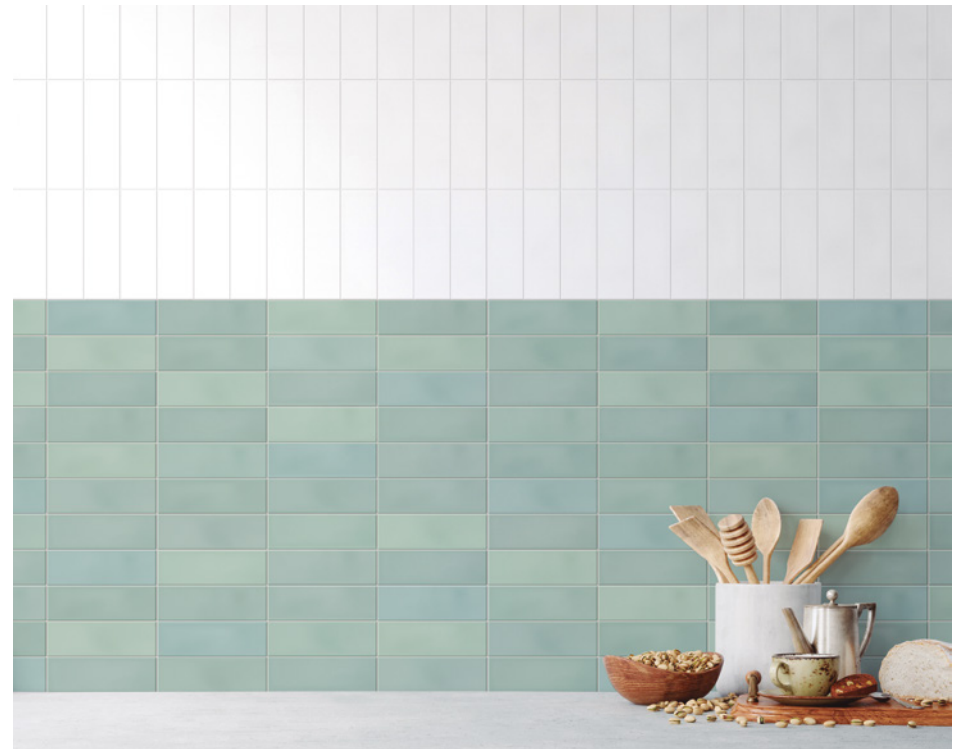

Wall: DECY 01 & 06 Matt


Sizes



DECY 01




DECY 10




DECY 02



DECY 04



DECY 05



DECY 07



DECY 06



DECY 08



DECY 03



DECY 09



	Size (mm)	Thickness	Finish	Colour Availability
1	200 x 65 (N)	8	Matt	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. Recommended for use on internal walls only.

Chalk

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DECY

Note : This product has a high colour variation rating between individual tiles

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 600 N	Conforms
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Chemical resistance: Domestic cleaning products & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			61%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.
February 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com