

Pico

Porcelain Design



Wall: DTPU 05 Up Natural

6 Colours / 1 Finish / 4 Patterns / 3 Sizes

Pico defines a mix between regular and irregular textures, in four surface patterns: Down, with sunken dots; Up, with elevated dots; Down Blue Dots and Down Red Dots add depth to this range making it dynamic and versatile.

Design Ronan & Erwan Bouroullec

Mutina



reddot design award
winner 2012

Wall: DTPD 02 Down Blue Dots Natural



Wall: DTPD 02 Down Red Dots Natural
Floor: DTPU 06 Up Natural



Wall: DTPU 01 Up Natural



Wall: DTPD 07 Down Red Dots Natural




Floor: DTPU 08 Up Natural


Sizes



DTPD 07 Down




DTPD 07 Down Blue Dots




DTPD 07 Down Red Dots



DTPD 01 Down




DTPD 01 Down Blue Dots




DTPD 01 Down Red Dots



DTPD 02 Down




DTPD 02 Down Blue Dots




DTPD 02 Down Red Dots




DTPD 08 Down



DTPD 08 Down Blue Dots




DTPD 08 Down Red Dots



DTPU 07 Up



DTPU 02 Up




DTPU 05 Up




DTPU 01 Up




DTPU 08 Up




DTPU 06 Up



Pattern: Up



Patterns: Down, Down Blue Dots & Down Red Dots

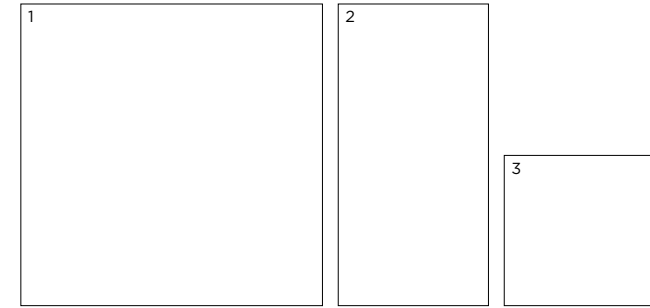

	Size (mm)	Thickness	Finish	Pattern	Colour Availability
1	1190 x 1190 (R)	12	Natural	Up Down Down Red Dots Down Blue Dots	DTPU 01, 02, 05, 06, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08
2	1190 x 594 (R)	12	Natural	Up Down Down Red Dots Down Blue Dots	DTPU 01, 02, 05, 06, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08
3	594 x 594 (R)	12	Natural	Up Down Down Red Dots Down Blue Dots	DTPU 01, 02, 05, 06, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08

(R) Rectified size – square edge with bevel. Special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

V1 - Low
Shade Variation


DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



Floor: DTPD 08 Down Natural

Special Pieces

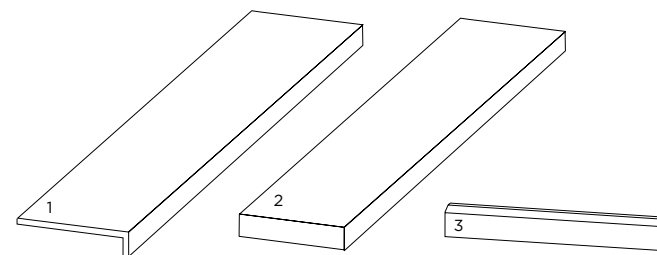

	Size (mm)	Thickness	Finish	Pattern	Colour Availability
1	Bullnose Step Tread 1200 x 330 x 45 (R)	12	Natural	Up Down Down Red Dots Down Blue Dots	DTPU 01, 02, 05, 06, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08
2	Angle Step Tread 1200 x 330 x 45	12	Natural	Up Down Down Red Dots Down Blue Dots	DTPU 01, 02, 05, 06, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08 DTPD 01, 02, 07 & 08
3	Skirting 600 x 38 (R)	12	Natural	Down	DTPD 01, 02, 07 & 08

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.

Pico

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Interior & Exterior Floors & Walls

Product Code: DTPU & DTPD

1.5mm dotted textures (UP and DOWN)

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27°	DTPD 07 only DTPU 07 only All other DTPD & DTPU colours
Areas with bare feet	DIN 51097	A over 12° to 18° B over 18° to 24°	All DTPD colours All DTPU colours
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.06% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	61.2 N/mm ² (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com