

Venistone 20mm

External 20mm / Porcelain Terrazzo



Floor: DXF SAV 02 Anti-Slip

5 Colours / 1 Finish / 1 Size

Venistone 20mm is a terrazzo-effect porcelain range that reproduces the Venetian breccia with an approach to contemporary art, a recall to the design and to the city of Venice, in its most modern meaning. Refer to Venistone for 10mm-thick indoor tiles with multiple surface finishes.



Floor: DXF SAV 04 Anti-Slip



Floor: DXF SAV 03 Anti-Slip



Floor: DXF SAV 05 Anti-Slip



DXF SAV 01




DXF SAV 02



DXF SAV 04




DXF SAV 03

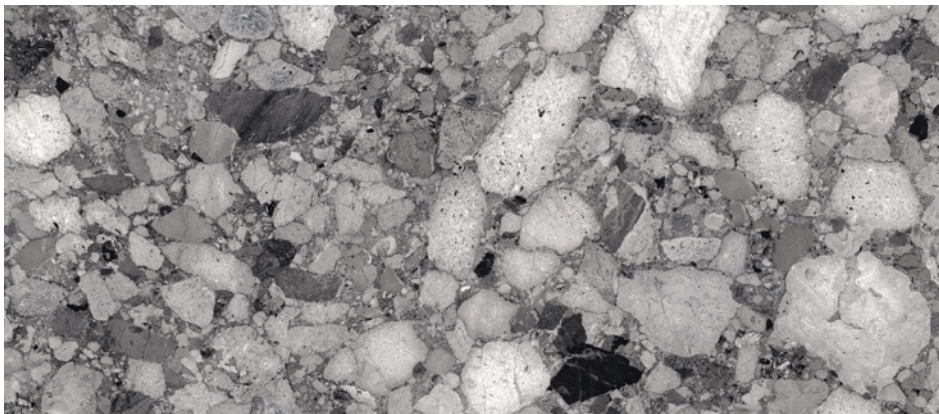


DXF SAV 05

Sizes




	Size (mm)	Thickness	Finish	Colour Availability
1	1195 x 595 (R)	20	Anti-Slip	All colours


(R) Rectified size – square edge with bevel. Recommended for outdoor use. Swatch colours may vary from original. Samples should be requested.




V3 - High Shade Variation

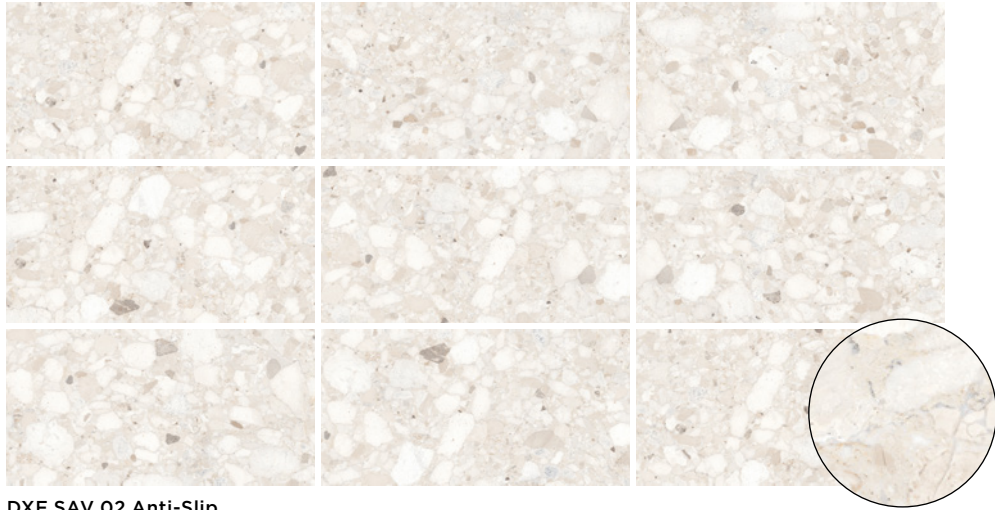


DXF SAV 02 Anti-Slip

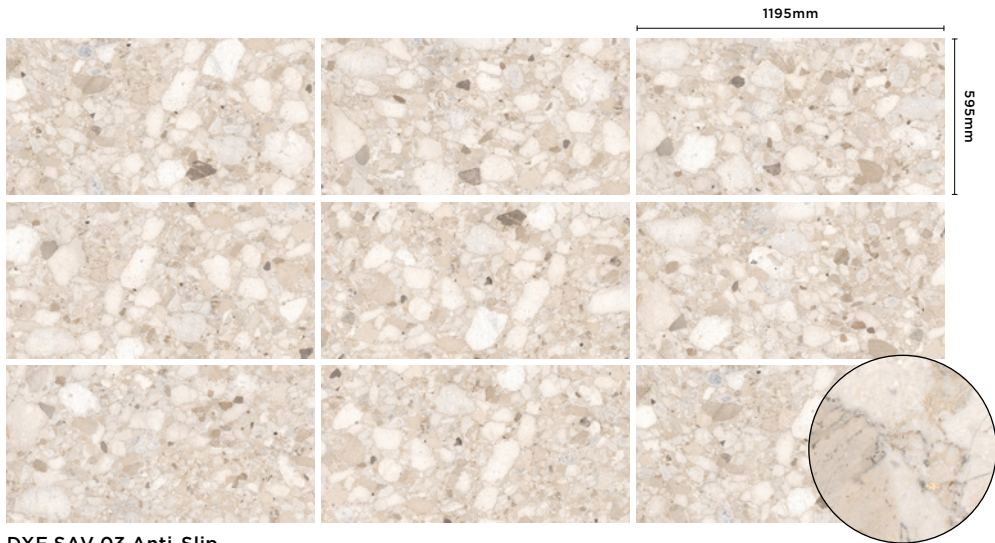


DXF SAV 03 Anti-Slip

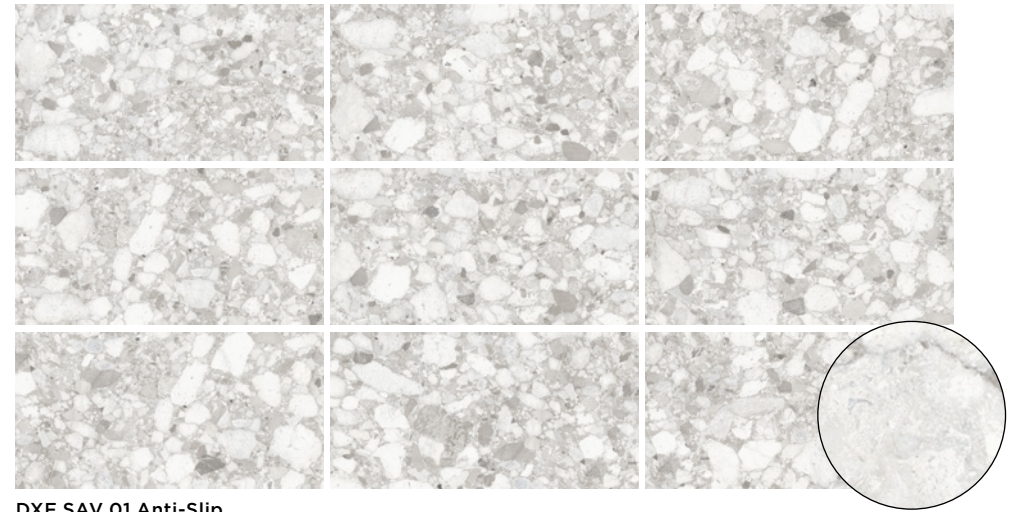

DXF SAV 01 Anti-Slip

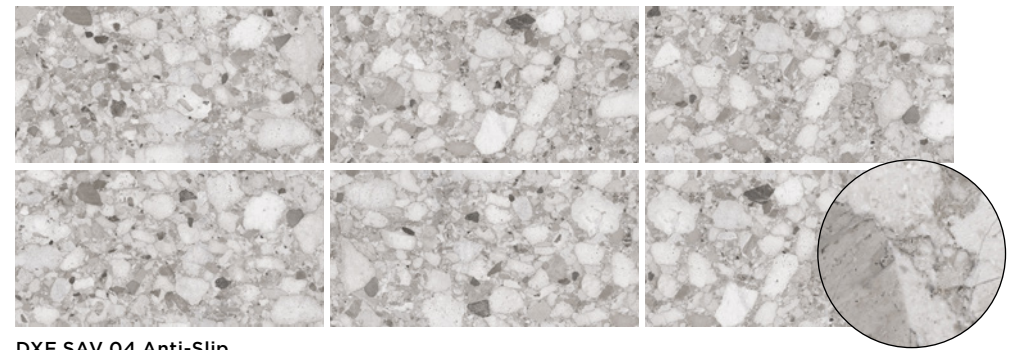

DXF SAV 04 Anti-Slip

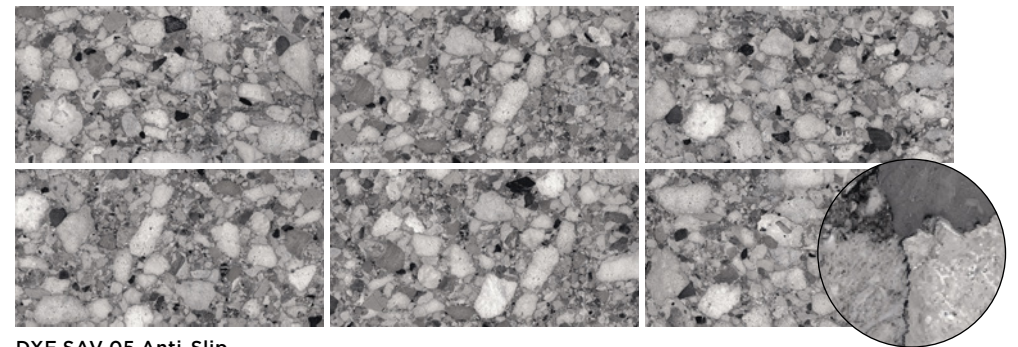

DXF SAV 05 Anti-Slip

Venistone 20mm

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors

Product Code: DXF SAV

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R11 from 19° to 27°	Anti-Slip
Areas with bare feet	DIN 51097	C over 24°	Anti-Slip
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.1% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	≥ 10000 N (typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	Conforms
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance:			
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	Conforms
Stain resistance	BS EN ISO 10545-14	Declared value	Class 3 min.
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			0%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com