


# Glace

Porcelain Design

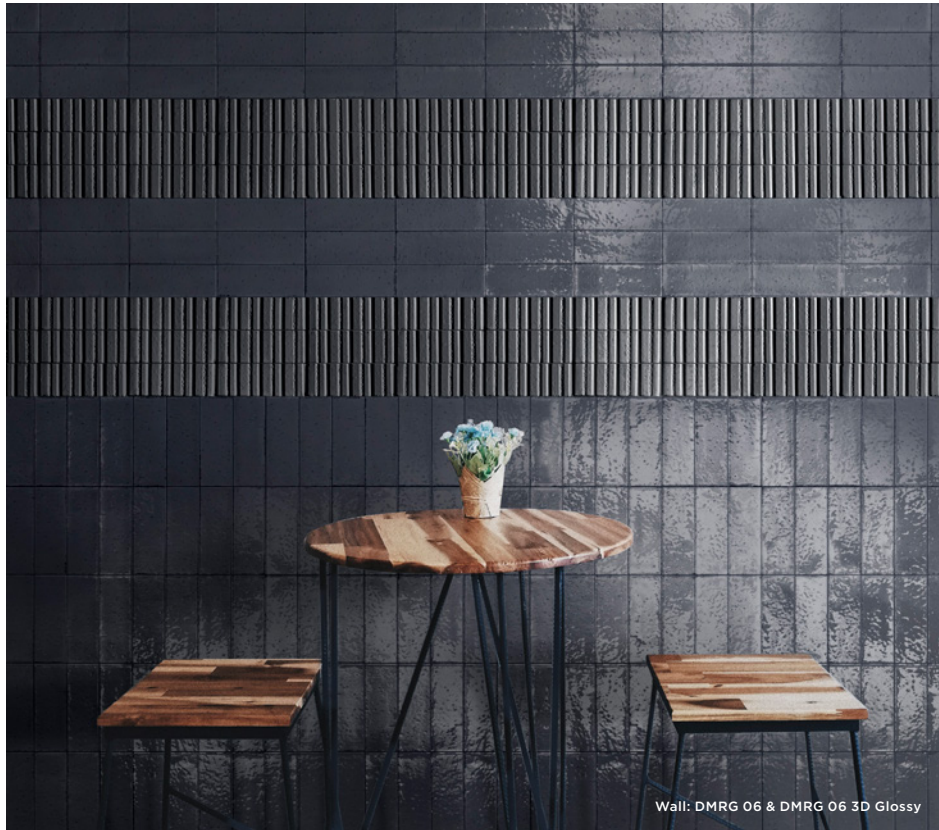

Wall: DMRG 06 & DMRG 06 3D Glossy

6 Colours / 1 Finish / 2 Sizes

Glace is a range of porcelain tiles in natural colours and a three-dimensional structure available in every shade. Along the sides of the tiles and in parts of their surfaces, there are touches of a clay colour that give the impression of gaps in the glaze, a distinctive feature of the handmade materials that inspire this range.



Wall (Top): DMRG 01 3D Glossy  
Wall (Bottom): DMRG 04 3D Glossy



Wall: DMRG 03 3D Glossy




Wall: DMRG 02 Glossy


# Sizes



DMRG 01



DMRG 02




DMRG 06



DMRG 01 3D



DMRG 02 3D




DMRG 06 3D




DMRG 04



DMRG 05




DMRG 03




DMRG 04 3D



DMRG 05 3D



DMRG 03 3D



	Size (mm)	Thickness	Finish	Colour Availability
1	200 x 75 (N)	9	Glossy	All colours
2	3D 200 x 75 (N)	11.5	Glossy	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.

V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


# V2 - Moderate Shade Variation




DMRG 01



DMRG 02

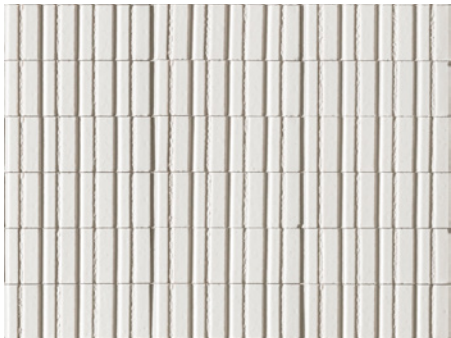

DMRG 01 3D

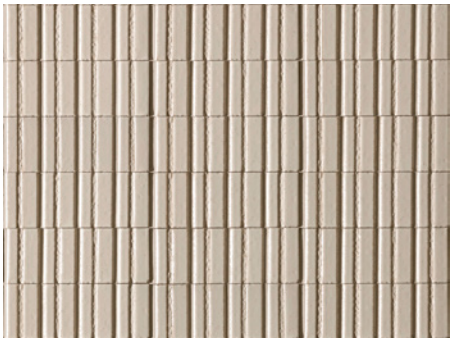


DMRG 02 3D



DMRG 03



DMRG 04

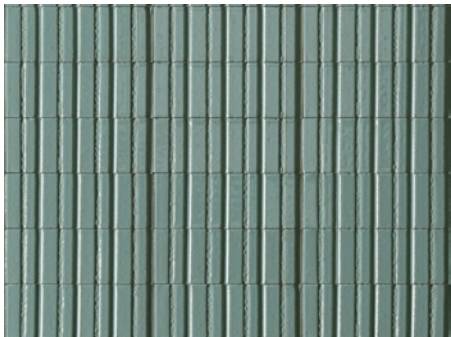


DMRG 03 3D




DMRG 04 3D




DMRG 05

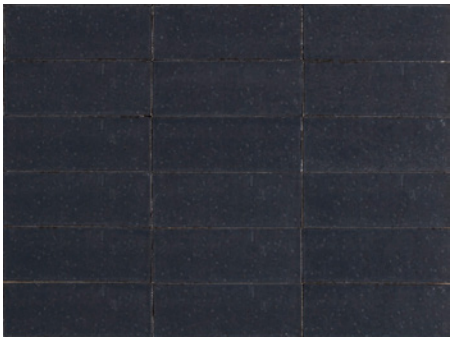

DMRG 06

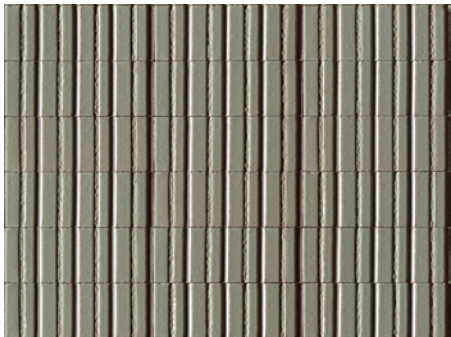

DMRG 05 3D

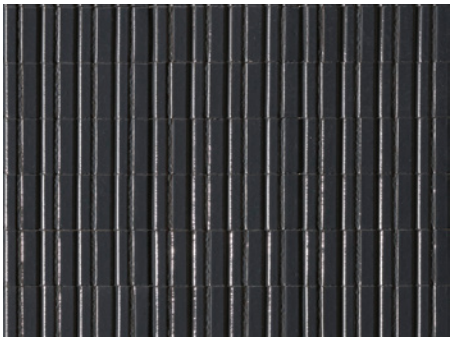

DMRG 06 3D

200mm

75mm

200mm

75mm

# Glace

Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group BIa)

**Use:** Walls (Internal & External)

**Product Code:** DMRG

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance:			
Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA-GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			23%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com