

# Stavanger Wall

*Ceramic Design*

Left Wall: DAKW 01 Matt  
Right Wall: DAKW 01 Line Décor Matt



Wall: DAKW 02 & DAKW Line Décor Matt



**3 Colours / 1 Finish / 2 Sizes / 2 Décors**

Stavanger Wall is a ceramic wall-tile range in a classic fine-grained limestone effect, presented in a palette of organic colours with subtle mineral inclusions. Stain-resistant and maintenance-free, this material is a compelling choice for residential and commercial projects. Refer to Stavanger for porcelain floor tiles.


# Sizes



DAKW 01



DAKW 01 Mur Décor

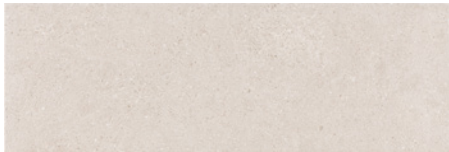

DAKW 02



DAKW 02 Mur Décor



DAKW 03




DAKW 03 Mur Décor



DAKW 01 Line Décor



DAKW 02 Line Décor

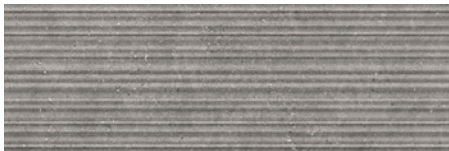

DAKW 03 Line Décor



	Size (mm)	Thickness	Finish	Colour Availability
1	900 x 300 (R)	8.7	Matt	All colours
	Line Décor 900 x 300 (R)	8.7	Matt	All colours
2	753 x 251 (N)	8.7	Matt	All colours
	Mur Décor 753 x 251 (N)	8.7	Matt	All colours

(R) Rectified size - square edge with bevel. (N) Nominal size - pressed edge. For wall use only. Swatch colours may vary from original. Samples should be requested.

# Stavanger Wall

## Technical Data

**Product Type:** Glazed Ceramic (BS EN 14411 – Group BIII)

**Use:** Walls (Internal only)

**Product Code:** DAKW

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GB
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			29%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July, 2019



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com