

Match-Up

Porcelain Stone



Floor: DCMUX 05 Mix Comfort PTV

7 Colours / 2 Grain Options / 3 Finishes / 3 Sizes / 1 Mosaic / 5 Décors

Match-Up consists of two basic surfaces: a stone effect with an urban and industrial aesthetic and an original marble agglomerate effect. Includes an array of décor options to choose from. It can be paired with Match-Up 20mm and Match-Up Magnum.



Shower Wall & Floor: DCMUX 01 Mix Comfort PTV
Wall: DCMU 06 Comfort PTV



Wall: DCMU 06 Comfort PTV



Floor: DCMU 04 Comfort PTV



Wall: Zigzag Décor (DCMU 06 & DCMUX 03 Mix) Comfort PTV



Wall: Lock Décor (DCMU 07 & DCMUX 04 Mix) Comfort PTV
Floor: DCMU 05 Comfort PTV




DCMU 01



DCMU 02



DCMU 07

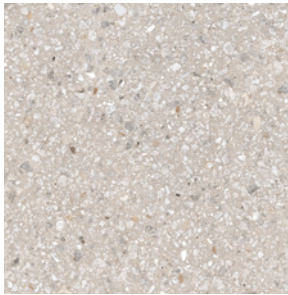

DCMUX 01 Mix



DCMUX 02 Mix



DCMU 06




DCMU 03




DCMU 04




DCMU 05

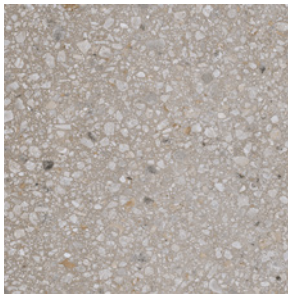

DCMUX 03 Mix




DCMUX 04 Mix



DCMUX 05 Mix

Sizes

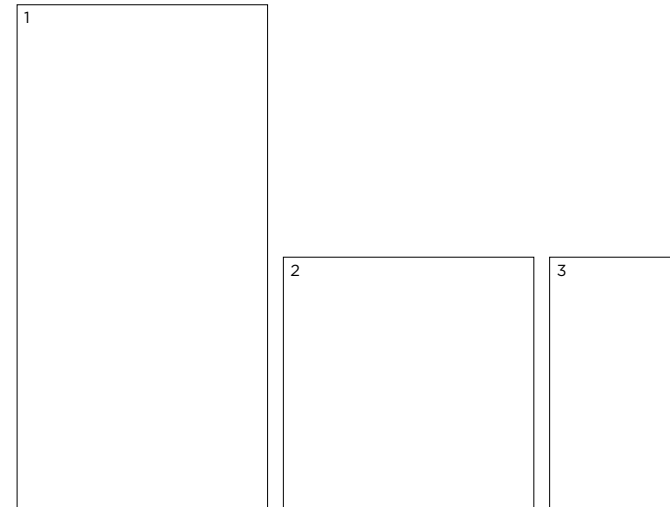

	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Comfort PTV Grip	All colours All colours
2	597 x 597 (R)	9	Comfort PTV	All colours
3	597 x 297 (R)	9	Comfort PTV	All colours


(R) Rectified size - square edge with bevel. Mosaics and décors shown on next page. Swatch colours may vary from original. Samples should be requested.




Mosaic 27 x 27mm




DCMU 01



DCMUX 01 Mix




DCMU 02




DCMUX 02 Mix




DCMU 03




DCMUX 03 Mix




DCMU 04




DCMUX 04 Mix




DCMU 05



DCMUX 05 Mix



DCMU 07




DCMU 06

Décors



Tropico Décor

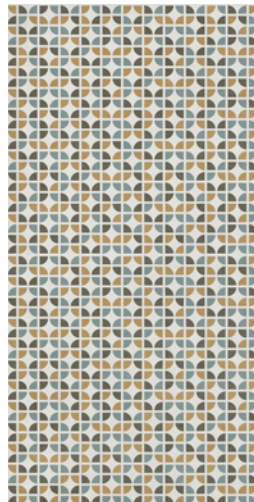

Waves Décor



Zigzag Décor




Lock Décor




Shapes Décor

Mosaics & Décors

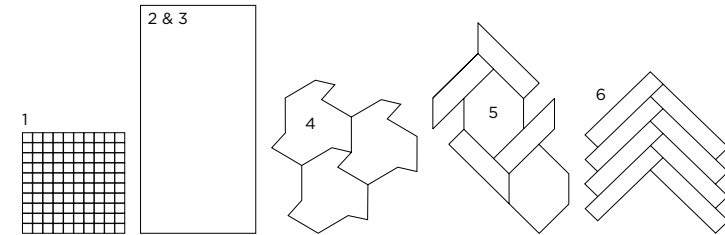

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 27 x 27 on 297 x 297 sheet	9	Comfort PTV	All colours
2	Tropico Décor 1197 x 597 (R)	9	Natural	As shown
3	Waves Décor 1197 x 597 (R)	9	Natural	As shown
4	Shapes Décor 499.9 x 482.8 (R)	9	Comfort PTV	Mix of DCMU 06, 07 & DCMUX 03 Mix
5	Lock Décor 386.9 x 386.9 (R)	9	Comfort PTV	Mix of DCMU 07 & DCMUX 04 Mix
6	Zigzag Décor 480.8 x 243.2 (R)	9	Comfort PTV	Mix of DCMU 06 & DCMUX 03 Mix

(R) Rectified size – square edge with bevel. Special pieces shown on next page. Swatch colours may vary from original. Samples should be requested. Line drawings not to scale. Shapes, Lock & Zigzag Décors are customisable using any available colours and finishes, upon special request.



DOMUS

Special Pieces



Floor: Shapes Décor (DCMU 06, 07 & DCMUX 03 Mix) Comfort PTV

Size (mm)	Thickness	Finish	Colour Availability
Plinth Skirting 597 x 46 (R)	9	Comfort PTV	All colours
Step Tread 1197 x 330 x 30 (R)	9	Comfort PTV	All colours
Angle Step Tread DX 1197 x 330 x 30 (R)	9	Comfort PTV	All colours
Angle Step Tread SX 1197 x 330 x 30 (R)	9	Comfort PTV	All colours

(R) Rectified size - square edge with bevel.



Wall: DCMU Waves Décor Natural

V2 Moderate - V3 High
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


Variations




DCMU 01 Comfort PTV




DCMU 06 Comfort PTV

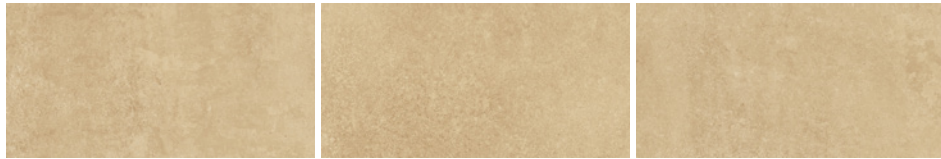


DCMU 07 Comfort PTV

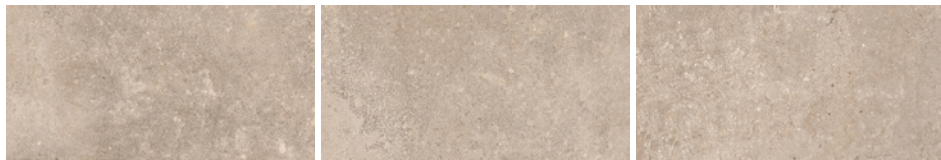


DCMU 02 Comfort PTV

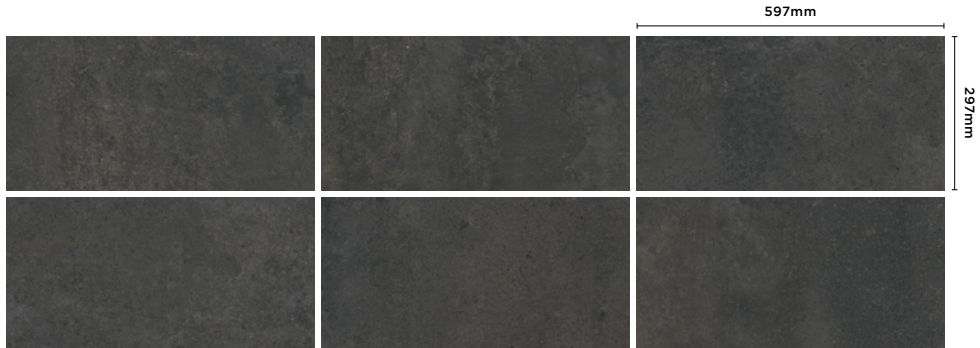


DCMU 05 Comfort PTV

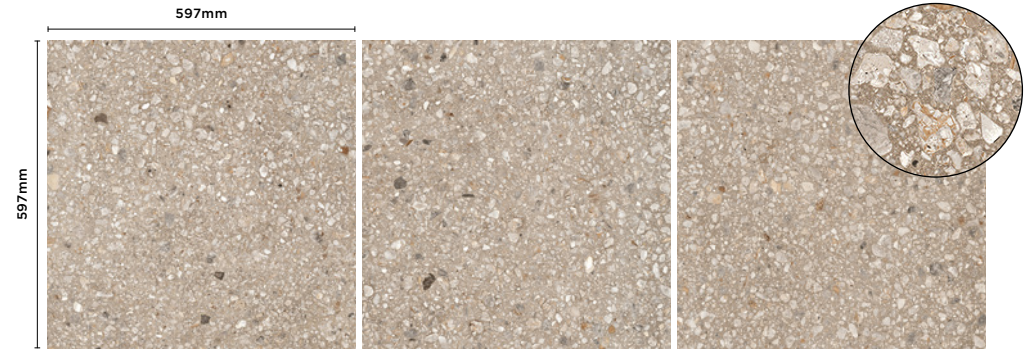


DCMUX 02 Mix Comfort PTV

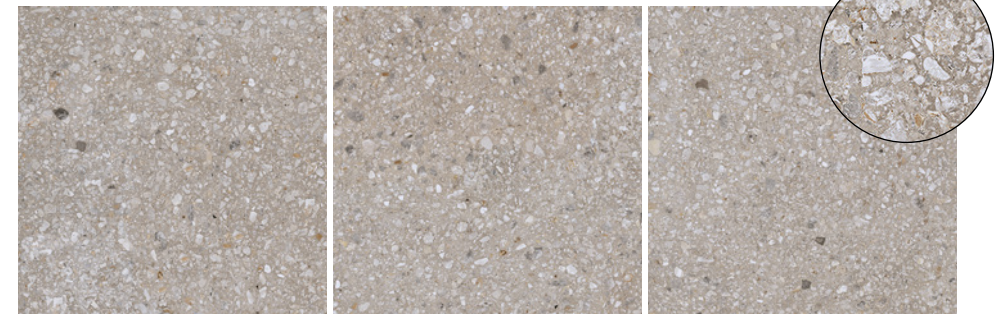

DCMUX 03 Mix Comfort PTV

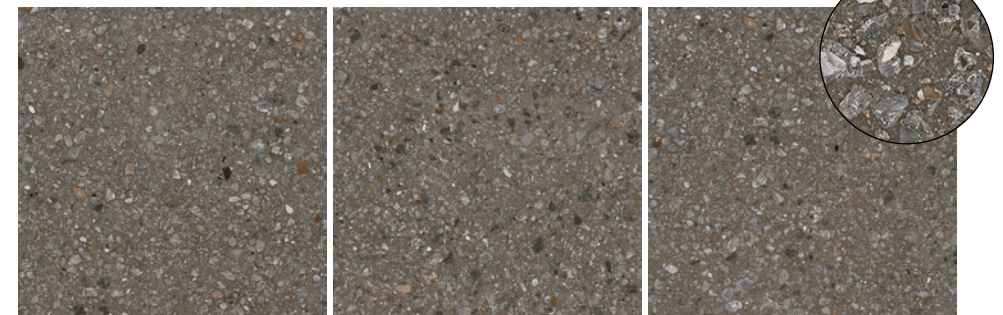

DCMUX 04 Mix Comfort PTV

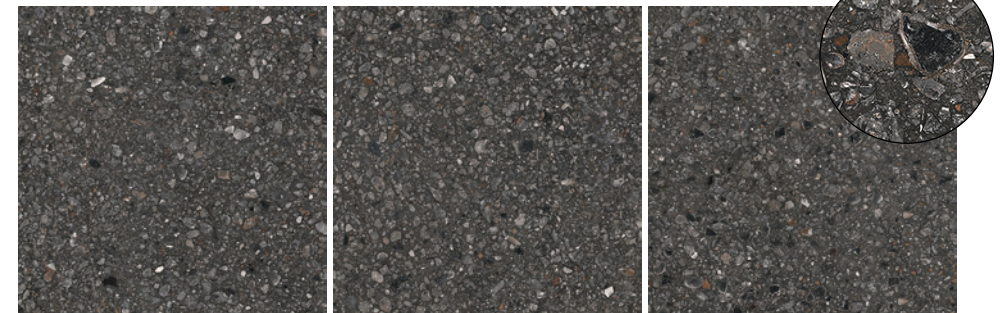

DCMUX 05 Mix Comfort PTV

Match-Up

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DCMU / DCMUX

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Comfort PTV Grip
Areas with bare feet	DIN 51097	B over 18° to 24°	Comfort PTV & Grip
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	50 N/mm ² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300N	3200 N (average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4-5 – Grip Class 5 – Comfort PTV
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com