

# Pinch

Porcelain Terrazzo



5 Colours / 1 Finish / 3 Sizes / 1 Mosaic

Pinch accurately evokes the details, colours and varied fleck patterning of unique Venetian Seminato terrazzo in porcelain. This range includes a mosaic option to help add a contemporary graphic look.








Floor: DMPN 04 Natural



Floor: DMPN 01 Natural




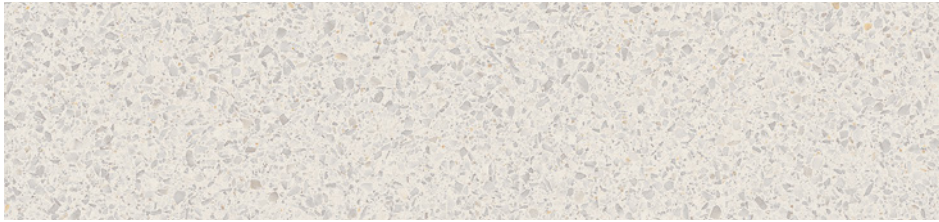


DMPN 01




DMPN 02

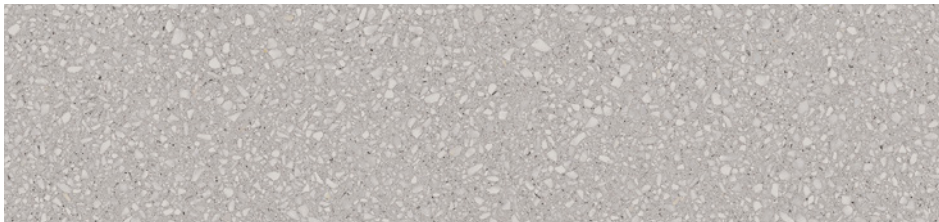

DMPN 03

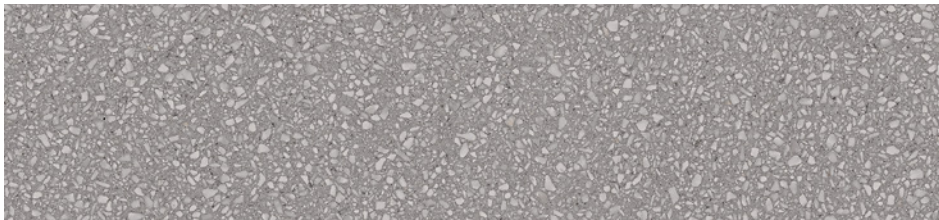


DMPN 04

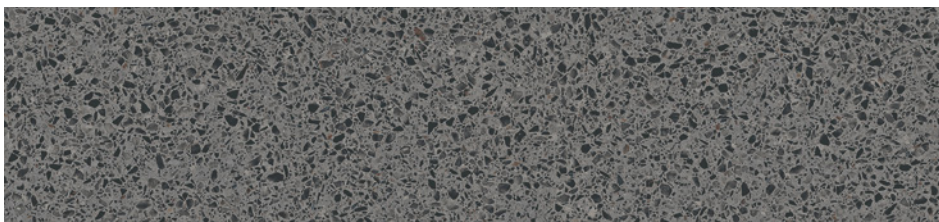


DMPN 05

# Sizes

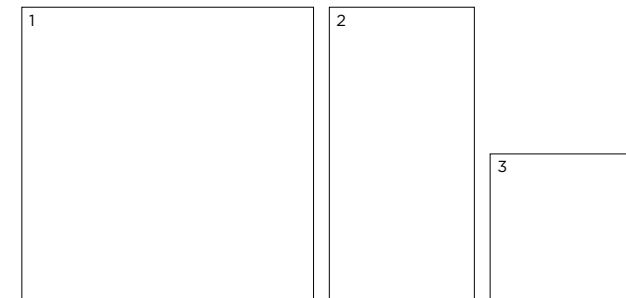

	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9.5	Natural	All colours
2	1198 x 598 (R)	9.5	Natural	All colours
3	598 x 598 (R)	9.5	Natural	All colours

(R) Rectified size - square edge with bevel. Mosaics shown on next page.  
Swatch colours may vary from original. Samples should be requested.




Mosaic



DMPN 01



DMPN 02




DMPN 03




Floor: DMPN 04 Natural

# Mosaics & Special Pieces



	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 50 x 50 on 298 x 298 sheet	10.5	Natural	DMPN 01, 02 & 03
	Skirting 600 x 70	9.5	Natural	All colours

Swatch colours may vary from original. Samples should be requested.



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



# Pinch

Technical Data

**Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)**

**Use: Floors & Walls**

**Product Code: DMPN**

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

## SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Natural
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	Conforms
Resistance to surface abrasion	*Internal method (see classifications below)	—	Class F – Lux Finish Class H – Natural Finish
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 9 x 10 <sup>-6</sup> / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA-GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Colour resistance to light exposure	DIN 51094	No noticeable colour alteration	Resistant
Recycled content			≥ 40%

### \* Factory classifications:

Class F – Tiles suitable for any room of a house without direct access from the outside or access not protected by doormats. Average stress abrasive wear.  
Class H – Materials suitable for situations of relatively hard abrasion in environments without protection against scratching, both public and private.



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. February 2020

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com