

Dripart

Porcelain Metal



6 Colours / 1 Finish / 6 Sizes / 1 Mosaic / 2 Décors

Dripart is a porcelain tile range inspired by the alchemical atmospheres in metal. With a high shade variation, this range includes mosaics and décor options to create seamless wall and floor combinations.





Wall: DSAD 04 Natural
Floor: DSAD 02 Natural



Floor: DSAD 02 Natural



DSAD 01



DSAD 05



DSAD 02



DSAD 06




DSAD 03



DSAD 04


Sizes

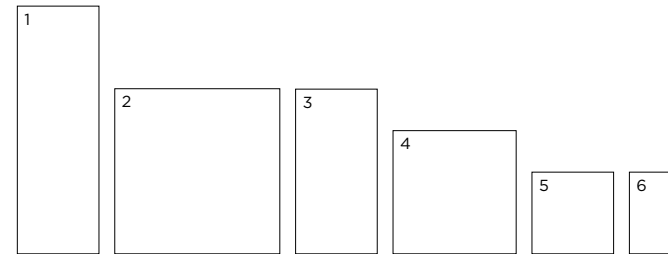


	Size (mm)	Thickness	Finish	Colour Availability
1	1795 x 595 (R)	9	Natural	All colours
2	1198 x 1198 (R)	9	Natural	All colours
3	1195 x 595 (R)	9	Natural	All colours
4	895 x 895 (R)	9	Natural	All colours
5	595 x 595 (R)	9	Natural	All colours
6	595 x 296 (R)	9	Natural	All colours

(R) Rectified size - squared edge with bevel. Mosaics, décors and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.


Drip Line Décor



DSAD 01 Drip Line Décor



DSAD 02 Drip Line Décor




DSAD 05 Drip Line Décor



DSAD 03 Drip Line Décor



DSAD 06 Drip Line Décor




DSAD 04 Drip Line Décor

Maxi Class Mosaic



DSAD 01 Maxi Class Mosaic



DSAD 02 Maxi Class Mosaic



DSAD 05 Maxi Class Mosaic



DSAD 03 Maxi Class Mosaic



DSAD 06 Maxi Class Mosaic



DSAD 04 Maxi Class Mosaic

Drip Rose Décor



DSAD Light Drip Rose Décor




DSAD Dark Drip Rose Décor

Mosaics, Décors & Special Pieces



	Size (mm)	Thickness	Finish	Colour Availability
1	Maxi Class Mosaic (R) on 345 x 300 sheet	9	Natural	All colours
2	Drip Line Décor 296 x 73 (R)	9	Natural	All colours
3	Drip Rose Décor 1200 x 600 (R)	9	Natural	DSAD Light & Dark
	Skirting 895 x 73 (R)	9	Natural	All colours
	Skirting 595 x 73 (R)	9	Natural	All colours
	Bullnose Step Tread 1195 x 330 (R)	9	Natural	All colours
	Angle Step Tread SX/DX 1195 x 330 (R)	9	Natural	All colours

(R) Rectified size - squared edge with bevel. Swatch colours may vary from original. Samples should be requested.



DOMUS

V3 - High Shade Variation



DSAD 01 Natural



DSAD 02 Natural




DSAD 05 Natural

V3 - High Shade Variation



DSAD 03 Natural

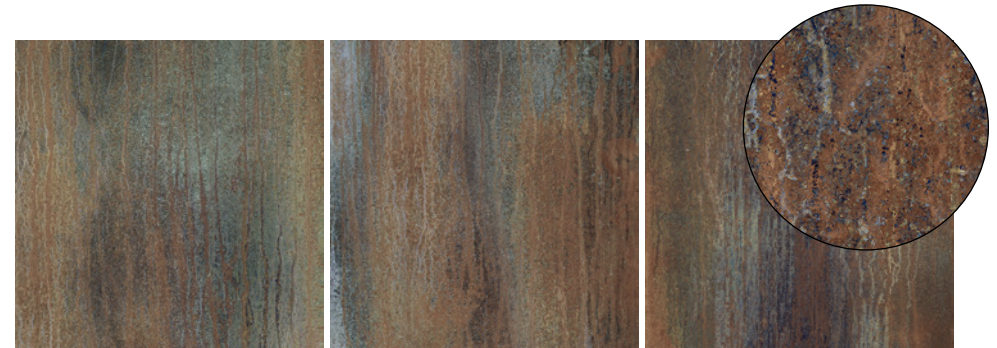

DSAD 06 Natural



DSAD 04 Natural

Dripart

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 - Group Bla)

Use: Floors & Walls

Product Code: DSAD

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Natural
Areas with bare feet	DIN 51097	A over 12° to 18°	Natural
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.1% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	Internal method *see classifications below		Class 5
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	Conforms
Stain resistance	BS EN ISO 10545-14	Min. Class 3 - glazed	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			> 20%

Class 5 - Extra-heavy traffic. Floors suitable for areas subject to frequent foot traffic and heavy abrasion, e.g. bars, shops, hotels, restaurants, public buildings, offices, schools, and exhibition halls. Particularly suitable for areas in direct contact with the outside.

