


Punto

Ceramic Design

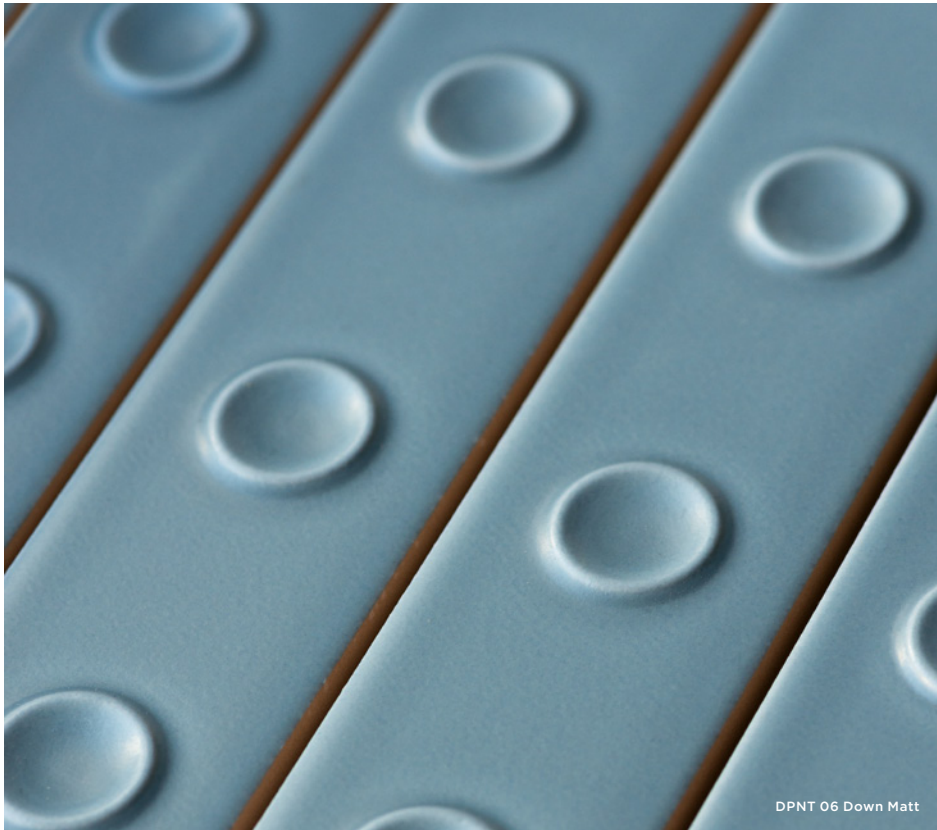


DPNT 06 Down Matt

10 Colours / 2 Finishes / 1 Size

Punto is a 3D decorative element that can only be used on walls. Characterised by big sunken dots (Down) or elevated dots (Up), Punto is best used on large surfaces. Depending on how light hits the surfaces, they create unexpected chiaroscuro effects that enliven interiors.

Design Ronan & Erwan Bouroullec

MU
TIN
A

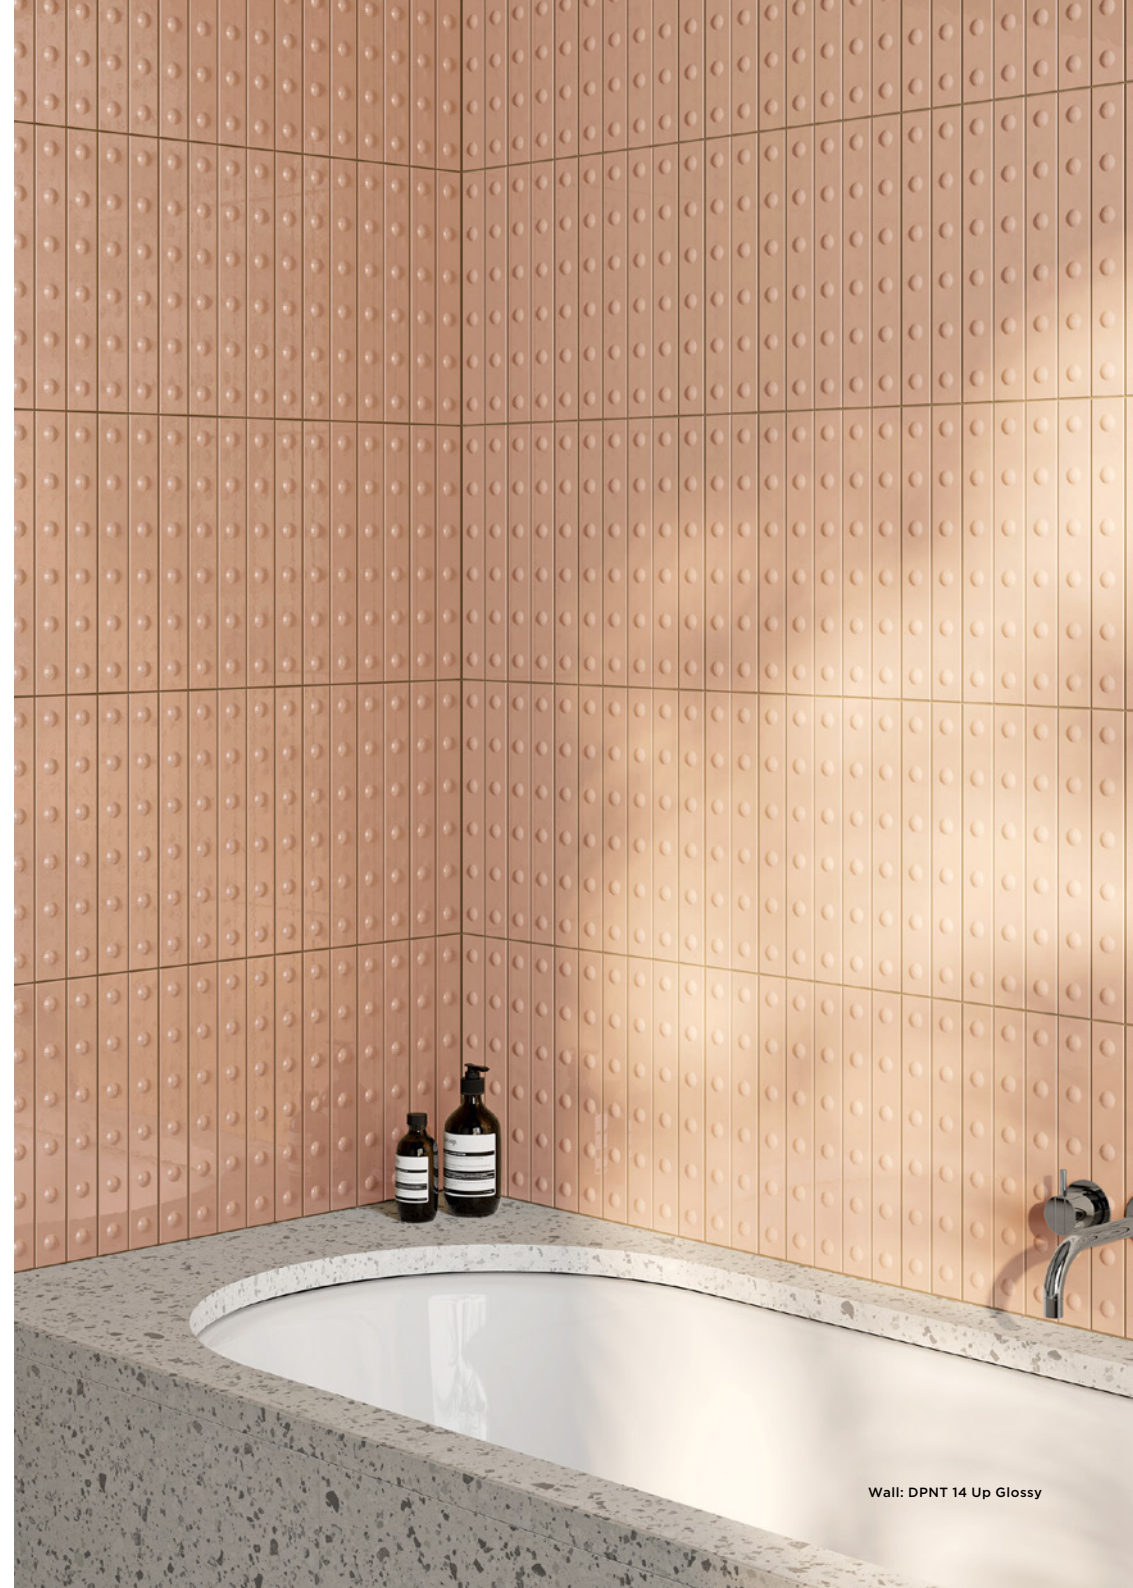


Wall: DPNT 14 Up Glossy




Wall: DPNT 01 Down Matt




Wall: DPNT 12 Up Glossy

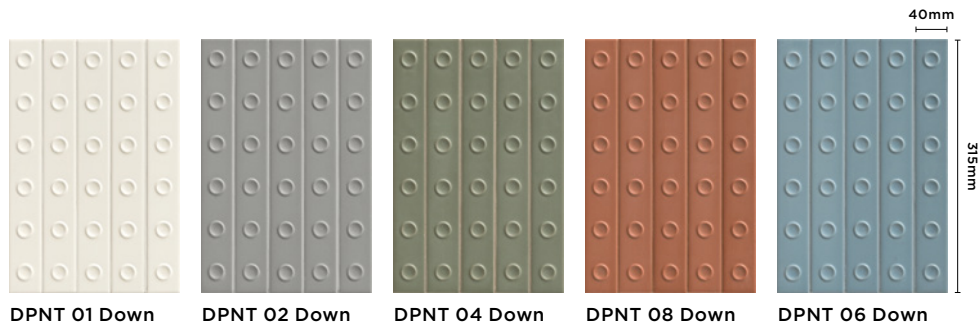

DPNT 01 Down DPNT 02 Down DPNT 04 Down DPNT 08 Down DPNT 06 Down

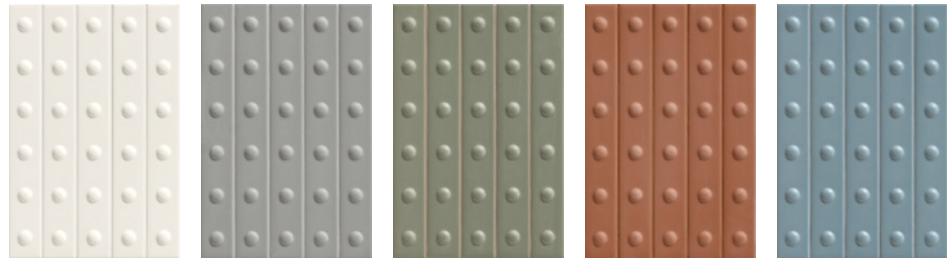

DPNT 01 Up DPNT 02 Up DPNT 04 Up DPNT 08 Up DPNT 06 Up

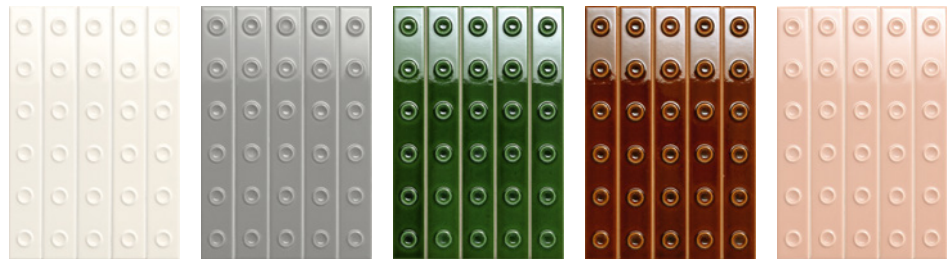


DPNT 10 Down DPNT 11 Down DPNT 13 Down DPNT 12 Down DPNT 14 Down



DPNT 10 Up DPNT 11 Up DPNT 13 Up DPNT 12 Up DPNT 14 Up

Sizes

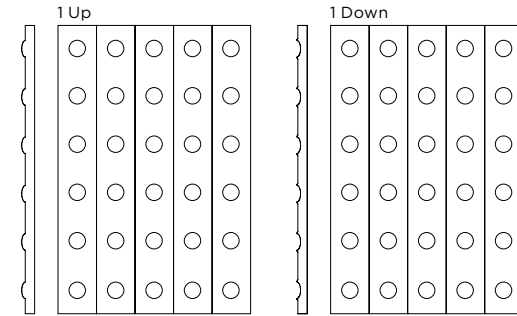

	Size (mm)	Thickness	Finish	Colour Availability
1	Up 315 x 40 (N)	15	Matt	DPNT 01, 02, 04, 06 & 08
	on 315 x 211 sheet	15	Glossy	DPNT 10-14
	Down 315 x 40 (N)	13	Matt	DPNT 01, 02, 04, 06 & 08
	on 315 x 211 sheet	13	Glossy	DPNT 10-14

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. Colours DPNT 12 & 13 have a unique crackle glaze (craquelé)—they need to be sealed before and after grouting and only cleaned with neutral detergents (plus grouted in cement-based grout only, always carry out a test area of grouting on an uninstalled piece or inconspicuous area before committing to the entire area).

V1 - Low
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Punto

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DPNT

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	17% (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 600 N	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 12 N/mm ²	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant*
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA-GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5*
Reaction to fire	Based on the decision 96/603/EC and its changes		A1**
Recycled content			64%

* Colours DPNT 12 & 13 have been manufactured with a crackle glaze (craquelé). These colours should therefore be sealed pre & post-grouting and cleaned with neutral detergents only. (Plus grouted in cement-based grout only. Always carry out a test area of grouting on an uninstalled tile or inconspicuous area before committing to the entire area).

** Mesh-backing is fibre glass and therefore classified as non-combustible



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. January 2021

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com