

Campus

Porcelain Stone




5 Colours / 1 Finish / 6 Sizes / 2 Mosaics

Campus is a porcelain tile range with stone-effect surfaces and high tonal variation. Available in a variety of modular sizes to suit specifications both commercial and residential. Refer to Campus 20mm for coordinating outdoor tiles in 20mm thickness.





Floor: DRKD 02 Matt

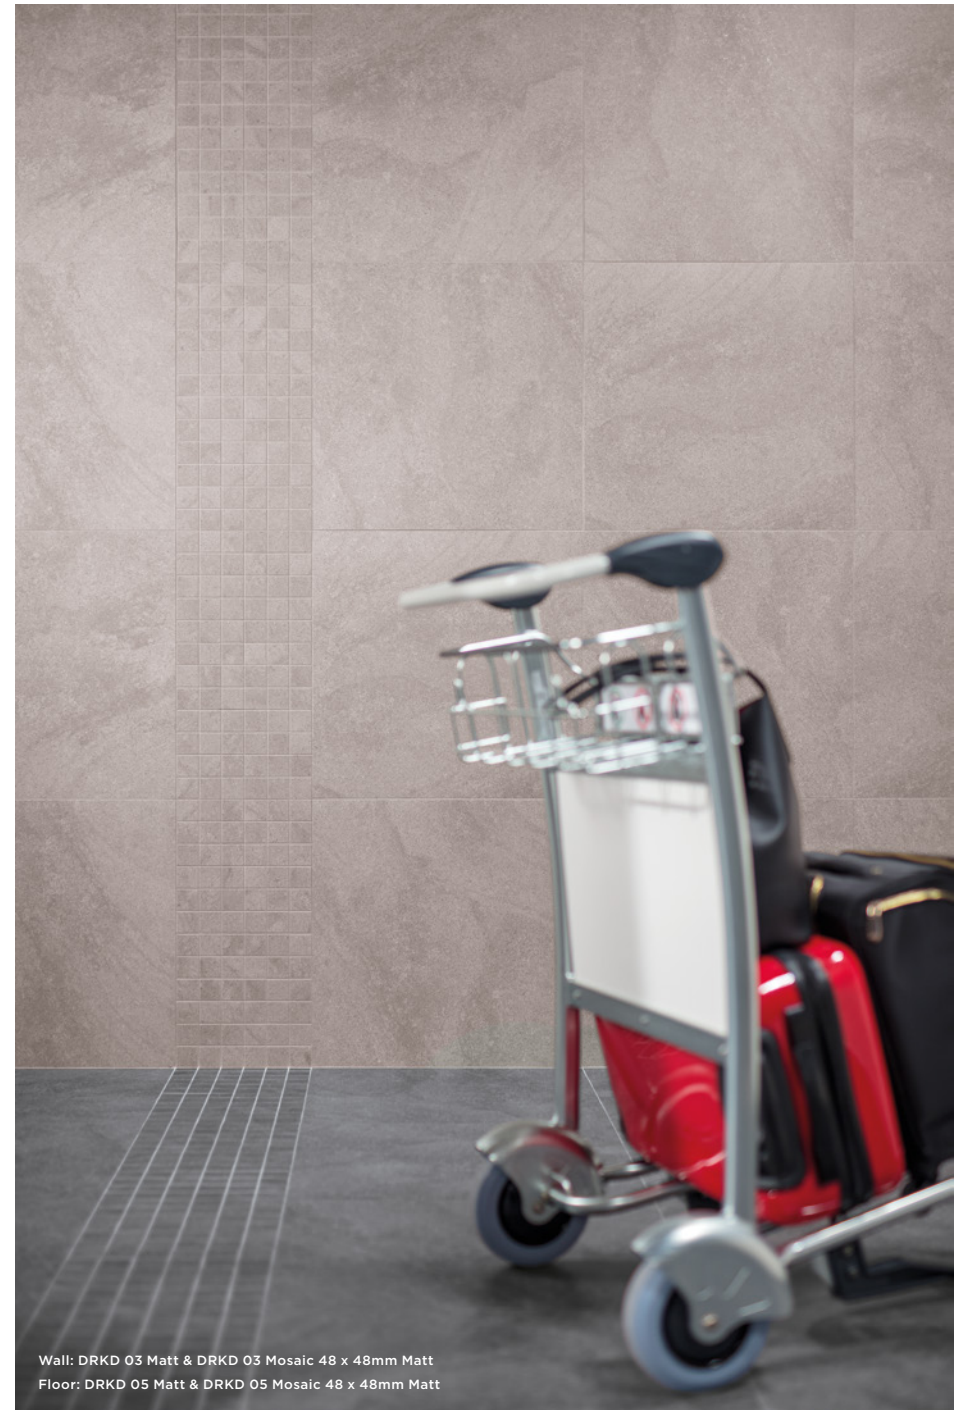

Wall: DRKD 03 Matt & DRKD 03 Mosaic 48 x 48mm Matt
Floor: DRKD 05 Matt & DRKD 05 Mosaic 48 x 48mm Matt



Floor: DRKD 05 Matt & DRKD 05 Mosaic 48 x 48mm Matt



Floor: DRKD 04 Matt & DRKD 04 Mosaic 48 x 48mm Matt



DRKD 01



DRKD 03



DRKD 02




DRKD 05




DRKD 04

Sizes

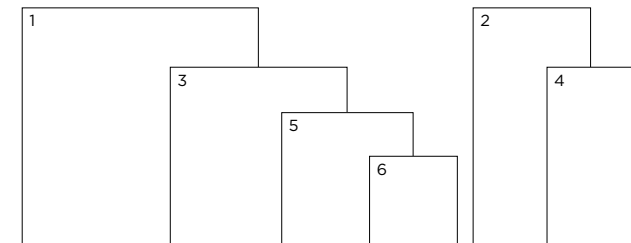

	Size (mm)	Thickness	Finish	Colour Availability
1	798 x 798 (R)	10	Matt	All colours
2	798 x 398 (R)	10	Matt	All colours
3	598 x 598 (R)	10	Matt	All colours
4	598 x 298 (R)	10	Matt	All colours
5	445 x 445 (R)	8	Matt	All colours
6	298 x 298 (R)	8	Matt	All colours

(R) Rectified size - square edge with bevel. Mosaics shown on next page. Swatch colours may vary from original. Samples should be requested.



Mosaic 48 x 48mm



DRKD 01 Mosaic 48 x 48



DRKD 02 Mosaic 48 x 48



DRKD 03 Mosaic 48 x 48



DRKD 04 Mosaic 48 x 48



DRKD 05 Mosaic 48 x 48

Mosaic 98 x 98mm



DRKD 01 Mosaic 98 x 98



DRKD 02 Mosaic 98 x 98



DRKD 03 Mosaic 98 x 98




DRKD 04 Mosaic 98 x 98




DRKD 05 Mosaic 98 x 98

Mosaics

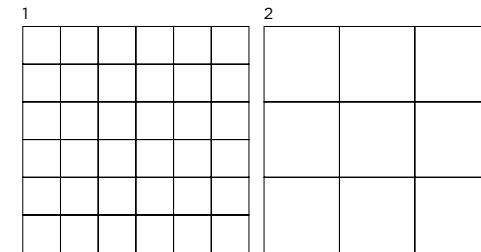

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 48 x 48 on 298 x 298 sheet	10	Matt	All colours
2	Mosaic 98 x 98 on 298 x 298 sheet	10	Matt	All colours

Swatch colours may vary from original. Samples should be requested.
Special pieces shown on next page.






Skirting 798 x 95 x 10mm



Skirting 598 x 95 x 10mm



Step Tread 798 x 398 x 10mm

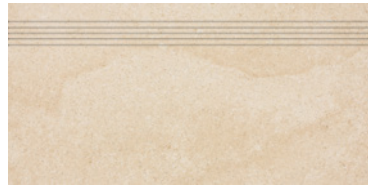

Step Tread 598 x 298 x 10mm



Skirting 448 x 85 x 10mm




Bullnose Step Tread 798 x 398 x 10mm

All special pieces shown in DRKD 02 colour




Floor: DRKD 02 Matt

Special Pieces

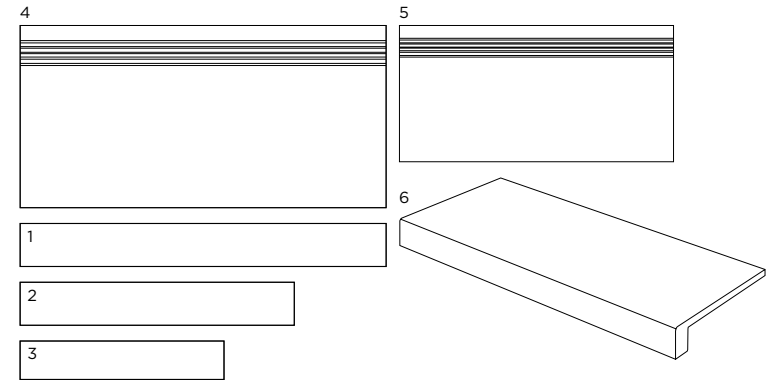

	Size (mm)	Thickness	Finish	Colour Availability
<hr/>				
	Skirting		Matt	All colours
1	798 x 95 (R)	10		
2	598 x 95 (R)	10		
3	448 x 85 (R)	8		
<hr/>				
	Step Tread	10	Matt	All colours
4	798 x 398 (R)			
5	598 x 298 (R)			
<hr/>				
6	Bullnose Step Tread 798 x 398 (R)	10	Matt	All colours

Swatch colours may vary from original. Samples should be requested.
Bullnose Step Tread available only by special order.



Campus

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DRKD

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.40%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.25%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.30%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.25%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Matt
Areas with bare feet	DIN 51097	A over 12° to 18°	Matt
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.3% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	40 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	2000 N (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	135 mm ³ (Typical value)
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	0.000008 / K (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 3
Recycled content			0%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020