

Marmi Medio


Technical Stone



Floor: DTS GR 148 Honed 200

10 Colours / 3 Finishes / 2 Sizes

Marmi Medio is a stylish terrazzo-effect range of agglomerate stones with medium-sized and varied inclusions. They are made from >93% natural marble chips & organic pigments. Refer to Marmi Ultra Fine and Marmi Grande for coordinating tiles with small and large inclusions.

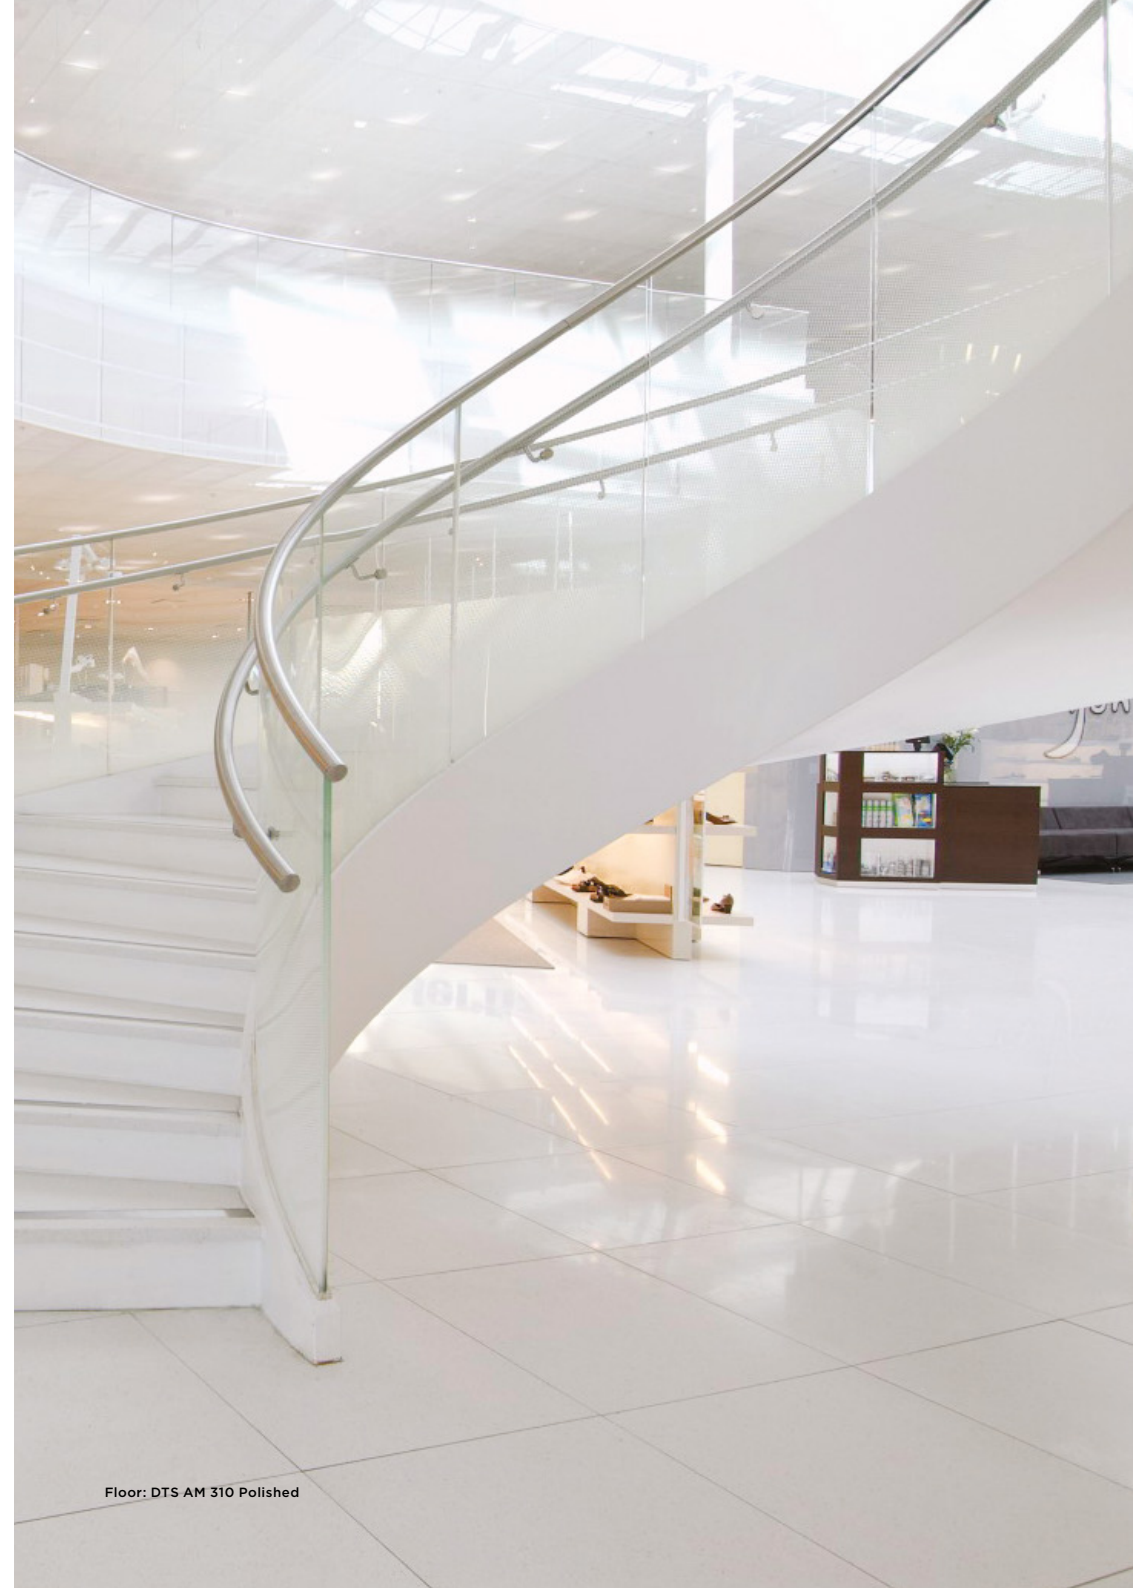

Floor: DTS AM 310 Polished




Floor: DTS GR 144 Honed DLV




Floor: DTS GR 154 Honed DLV




DTS AM 310




DTS GR 151




DTS GR 154




DTS GR 144




DTS GR 148




DTS GR 160




DTS GR 145



DTS GR 159




DTS GR 157




DTS GR 158

Sizes

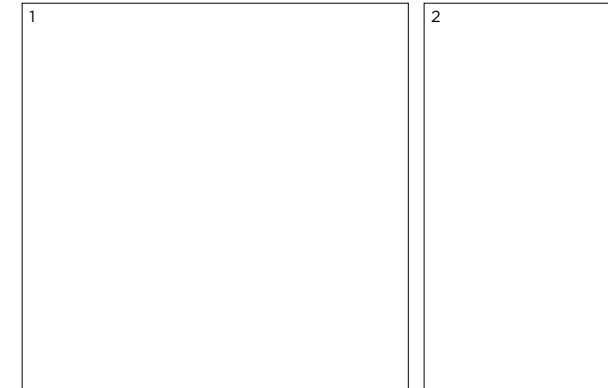

	Size (mm)	Thickness	Finish	Colour Availability
1	600 x 600 (NB)	12	Honed DLV	All colours
			Honed 200	All colours
			Polished	All colours
2	600 x 300 (NB)	12	Honed DLV	DTS AM 310, DTS GR 144, DTS GR 145, DTS GR 148, DTS GR 151 & DTS GR 154
			Honed 200	DTS AM 310, DTS GR 144, DTS GR 145, DTS GR 148, DTS GR 151 & DTS GR 154
			Polished	DTS AM 310, DTS GR 144, DTS GR 145, DTS GR 148, DTS GR 151 & DTS GR 154

(NB) Square-edged and non-bevelled. A bevel can be put on upon request. Swatch colours may vary from original. Samples should be requested.



Marmi Medio

Technical Data

Product Type: Technical Stone

Use: Walls & Floors

Product Code: DTS GR 144, 145, 148, 151 & 154 and DTS AM 310

Note : these tiles will require sealing with e.g. FILA MP90 Eco Xtreme after grouting

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN 15285:2008	± 0.5mm	Conforms
Thickness	BS EN 15285:2008	± 0.7mm	Conforms
Edge straightness	BS EN 15285:2008	± 0.3mm	Conforms
Orthogonality (squareness)	BS EN 15285:2008	± 0.9mm	Conforms
Planarity (flatness)	BS EN 15285:2008	± 0.2%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Slip resistance Coefficient of friction	BS EN 14231	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2024

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Unit	Actual Value
Water absorption	BS EN ISO 14617-1	%w/w	< 0.25* *Except DTS AM 310 = < 0.15
Compressive Strength	BS EN ISO 14617-15	Mpa	> 80* *Except DTS AM 310 = > 100
Flexural Strength	BS EN ISO 14617-2	Mpa	> 12 (DTS GR 151 & 154) > 15 (DTS GR 144, 145 & 148) > 20 (DTS AM 310)
Density	BS EN ISO 14617-1	Kg/dm ³	2.40 - 2.65* *Except DTS AM 310 = 2.40 - 2.55
Abrasion Resistance	BS EN ISO 14617-4	mm ³	288 - 481 (DTS AM 310) 300 - 481 (DTS GR 144, 145 & 148) 300 - 582 (DTS GR 151 & 154)
Linear Thermal Expansion Coefficient	BS EN 14617-11	°C ⁻¹	15-21x10 ⁻⁶ (DTS GR 144, 145 & 148) 15-27x10 ⁻⁶ (DTS GR 151 & 154) 17-30x10 ⁻⁶ (DTS AM 310)
Freeze and Thaw Resistance	BS EN 14617-5	Declared Value	Variable depending on marble type* *Except DTS AM 310 which is Resistant
Dimensional Stability	BS EN ISO 14617-12	Class	A
Reaction to Fire	BS EN ISO 13501-1	-	A2 _{FL} - S1
Recycled content			DTS AM 310 = 0% DTS GR 144, 145 & 148 = 10-30% DTS GR 151 & 154 = 50-70%



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com