

# Build 2.0 Bold Magnum

*Lightweight Slabs / Porcelain Minimal*



10 Colours / 2 Finishes / 4 Sizes

Build 2.0 Bold Magnum can be combined with Build 2.0 Cement Magnum to promote the powerful coupling of the neutrality of cement with the boldness of saturated colours destined for architecture. These solid, bold colour slabs, are recommended to be used on indoor walls only.



Wall: DMAG 125 Natural



Wall: DMAG 121 Natural



Wall: DMAG 125 Glossy



DMAG 117




DMAG 119




DMAG 118



DMAG 120



DMAG 121



DMAG 122



DMAG 123



DMAG 124




DMAG 125




DMAG 126

# Sizes

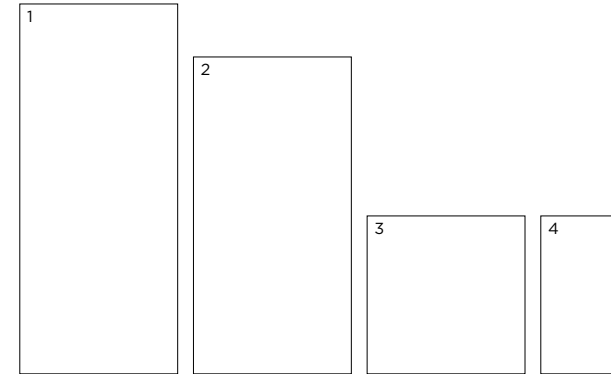

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Natural Glossy	All colours All colours
2	2397 x 1197 (R)	6	Natural Glossy	All colours All colours
3	1197 x 1197 (R)	6	Natural Glossy	All colours All colours
4	1197 x 597 (R)	6	Natural Glossy	All colours All colours

(R) Rectified size – square edge with bevel. For indoor wall use only.  
Swatch colours may vary from original. Samples should be requested.

 V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Build 2.0 Bold Magnum

## Technical Data

**Product Type:** Decorated Porcelain Stoneware (BS EN 14411 – Group Bla)

**Use:** Interior Walls

**Product Code:** DMAG 117 - 126

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	52 N/mm <sup>2</sup> (Typical value)
Breaking strength	BS EN ISO 10545-4	< 7.5mm ≥ 700 N	1350 N (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm <sup>3</sup>	140 mm <sup>3</sup> (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Class 4 – 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1
Recycled content			0%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020