


Floss

Porcelain Concrete



4 Colours / 2 Finishes / 7 Sizes / 4 Mosaics

Floss finds its inspiration in concrete with its irregular tonal variation and characteristic features reproduced in porcelain through the astute surface application of mineral salts. Refer to Floss Slim for lightweight porcelain slab options for use on walls and floors.

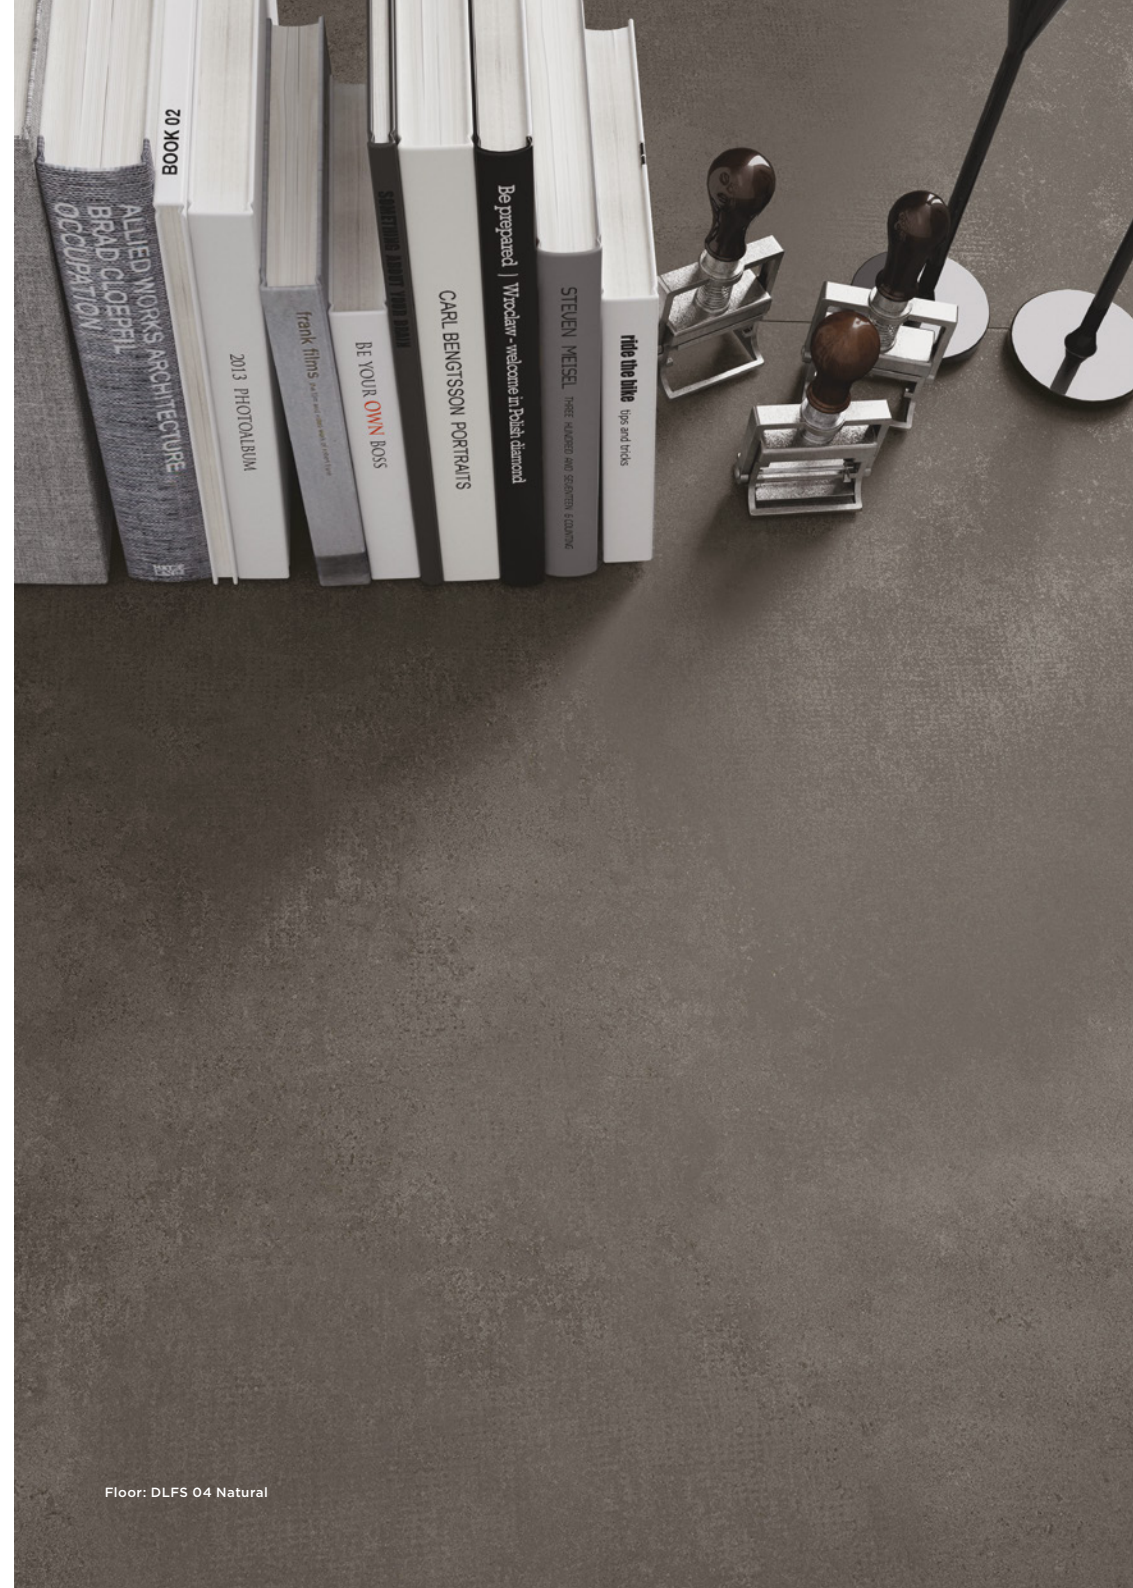



Floor: DLFS 03 Natural



Wall: DLFS 02 Natural
Floor: DLFS 02 Natural Grip

Sizes



DLFS 01




DLFS 02



DLFS 03



DLFS 04

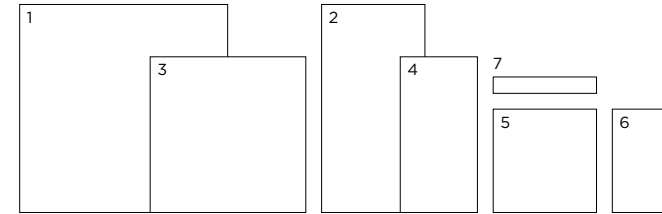


| | Size (mm) | Thickness | Finish | Colour Availability |
|---|-----------------|-----------|-------------------------|----------------------------|
| 1 | 1198 x 1198 (R) | 9 | Natural Natural Grip | All colours All colours |
| 2 | 1198 x 598 (R) | 9 | Natural Natural Grip | All colours All colours |
| 3 | 898 x 898 (R) | 9 | Natural Natural Grip | All colours All colours |
| 4 | 898 x 448 (R) | 9 | Natural Natural Grip | All colours All colours |
| 5 | 598 x 598 (R) | 9 | Natural Natural Grip | All colours All colours |
| 6 | 598 x 298 (R) | 9 | Natural Natural Grip | All colours All colours |
| 7 | 598 x 98 (R) | 9 | Natural Natural Grip | All colours All colours |

(R) Rectified size - squared edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

Mosaics

Mosaic 25 x 25mm

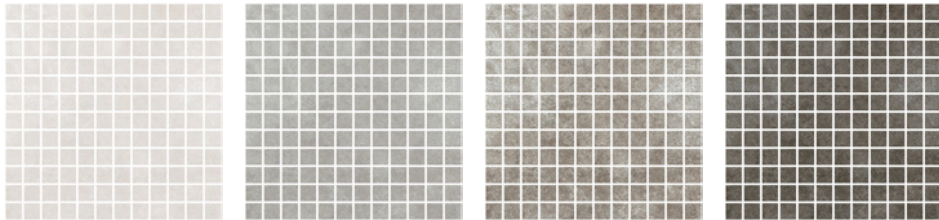


DLFS 01 DLFS 02 DLFS 03 DLFS 04

Mosaic 55 x 55mm



DLFS 01 DLFS 02 DLFS 03 DLFS 04

Mosaic 150 x 30mm

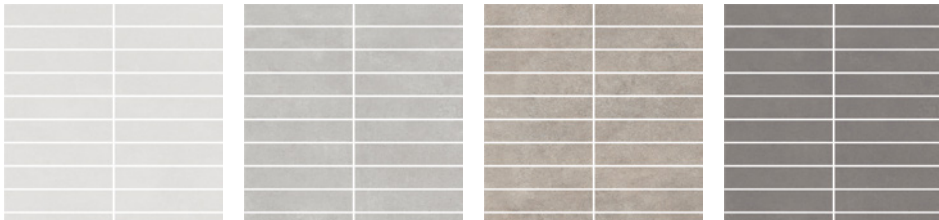


DLFS 01 DLFS 02 DLFS 03 DLFS 04

Muretto Mosaic



DLFS 01 DLFS 02 DLFS 03 DLFS 04

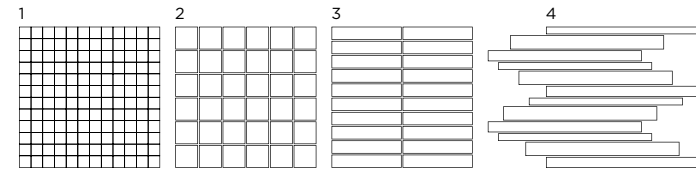

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|---------------------------------------|-----------|---------|---------------------|
| 1 | Mosaic 25 x 25 on 298 x 298 sheet | 9 | Natural | All colours |
| 2 | Mosaic 55 x 55 on 298 x 298 sheet | 9 | Natural | All colours |
| 3 | Mosaic 150 x 30 on 298 x 298 sheet | 9 | Natural | All colours |
| 4 | Muretto Mosaic on 298 x 298 sheet | 9 | Natural | All colours |

Swatch colours may vary from original. Samples should be requested.
Special pieces shown on next page.


Special Pieces



Wall: DLFS 04 Natural

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|-------------------------------------|-----------|-------------------------|----------------------------|
| 1 | Skirting 1198 x 48 | 9 | Natural Natural Grip | All colours All colours |
| 2 | Skirting 898 x 48 | 9 | Natural Natural Grip | All colours All colours |
| 3 | Skirting 598 x 48 | 9 | Natural Natural Grip | All colours All colours |
| 4 | Step Tread 1198 x 333 x 30 | 9 | Natural Natural Grip | All colours All colours |
| 5 | Step Tread 898 x 333 x 30 | 9 | Natural Natural Grip | All colours All colours |
| 6 | Step Tread 598 x 333 x 30 | 9 | Natural Natural Grip | All colours All colours |
| 7 | Angle Step Tread 1198 x 333 x 30 | 9 | Natural Natural Grip | All colours All colours |
| 8 | Angle Step Tread 898 x 333 x 30 | 9 | Natural Natural Grip | All colours All colours |
| 9 | Angle Step Tread 598 x 333 x 30 | 9 | Natural Natural Grip | All colours All colours |

Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Floss

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DLFS

DIMENSION & SURFACE QUALITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width | BS EN ISO 10545-2 | ± 0.60% (max. ± 2.0mm) | Conforms |
| Thickness | BS EN ISO 10545-2 | ± 5% (max. ± 0.5mm) | Conforms |
| Edge straightness | BS EN ISO 10545-2 | ± 0.50% (max. ± 1.5mm) | Conforms |
| Orthogonality (squareness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | Conforms |
| Planarity (flatness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | Conforms |
| Appearance | BS EN ISO 10545-2 | > 95% | Conforms |

SLIP RESISTANCE

| Technical Characteristics | Industry Standards | Requirement | Finish |
|--|--------------------------------|--|-------------------------|
| Areas with footwear | BS EN ISO 10545-17 (DIN 51130) | R9 from 3° to 10° R11 from 19° to 27° | Natural Natural Grip |
| Areas with bare feet | DIN 51097 | A over 12° to 18° C over 24° | Natural Natural Grip |
| Slip resistance Coefficient of friction | BS 7976-2 | Test results upon request | |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|---|---|-----------------------------------|---|
| Water absorption | BS EN ISO 10545-3 | ≤ 0.5% | Conforms |
| Modulus of rupture (bending strength) | BS EN ISO 10545-4 | ≥ 35 N/mm ² | Conforms |
| Breaking strength | BS EN ISO 10545-4 | ≥ 1300 N | Conforms |
| Resistance to surface abrasion | BS EN ISO 10545-7 | PEI *see classifications below | Class 4 – DLFS 01 Class 3 – DLFS 02, 03 & 04 |
| Thermal shock resistance | BS EN ISO 10545-9 | No visible defects | Resistant |
| Crazing resistance | BS EN ISO 10545-11 | No visible signs | Resistant |
| Frost resistance | BS EN ISO 10545-12 | No surface alteration | Resistant |
| Chemical resistance: Low concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | GLA |
| Domestic chemicals & additives for swimming pools | BS EN ISO 10545-13 | GB min. | GA |
| Stain resistance | BS EN ISO 10545-14 | Min. Class 3 | Class 5 |
| Reaction to fire | Based on the decision 96/603/EC and its changes | A1 _{FL} /A1 | A1 _{FL} /A1 |
| Recycled content | | | 30% |

*PEI classifications

PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2019

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com