


Sensi Magnum


Lightweight Slabs / Porcelain Stone

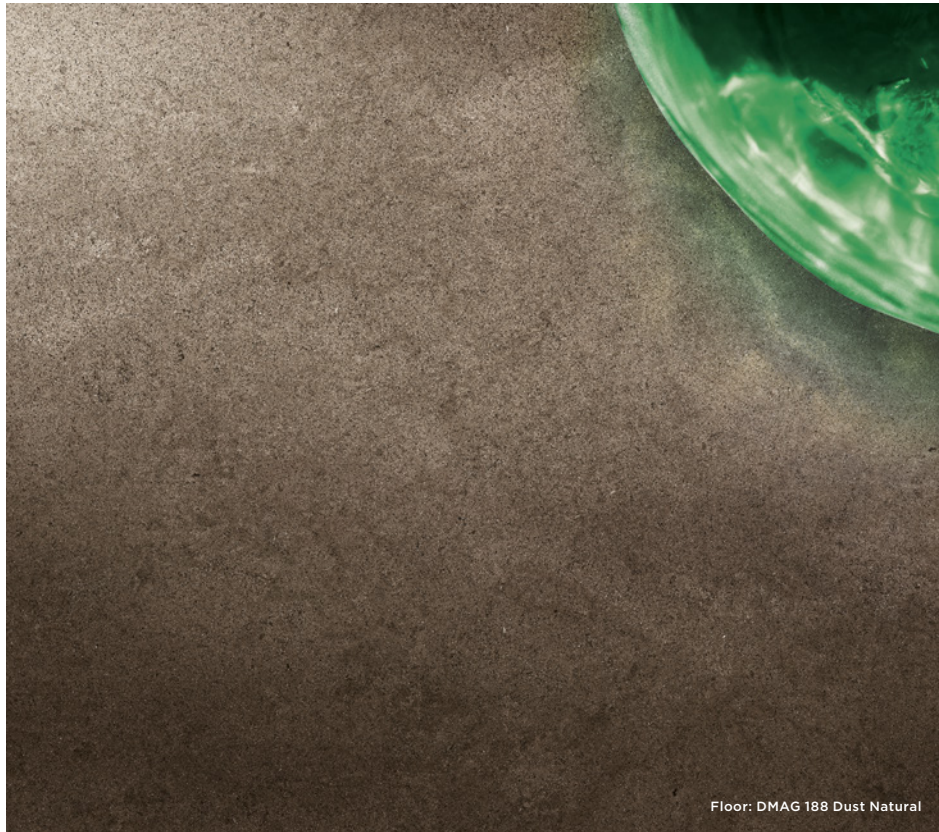

5 Colours / 4 Finishes / 4 Textures / 4 Sizes / 1 Mosaic

In a neutral palette of mineral tones with surface textures inspired by earth, sand and stone, Sensi Magnum takes its cues from nature to introduce a sense of character to interior and exterior spaces. Made from up to 20.5% recycled materials mixed with natural raw materials through a sustainable production process.



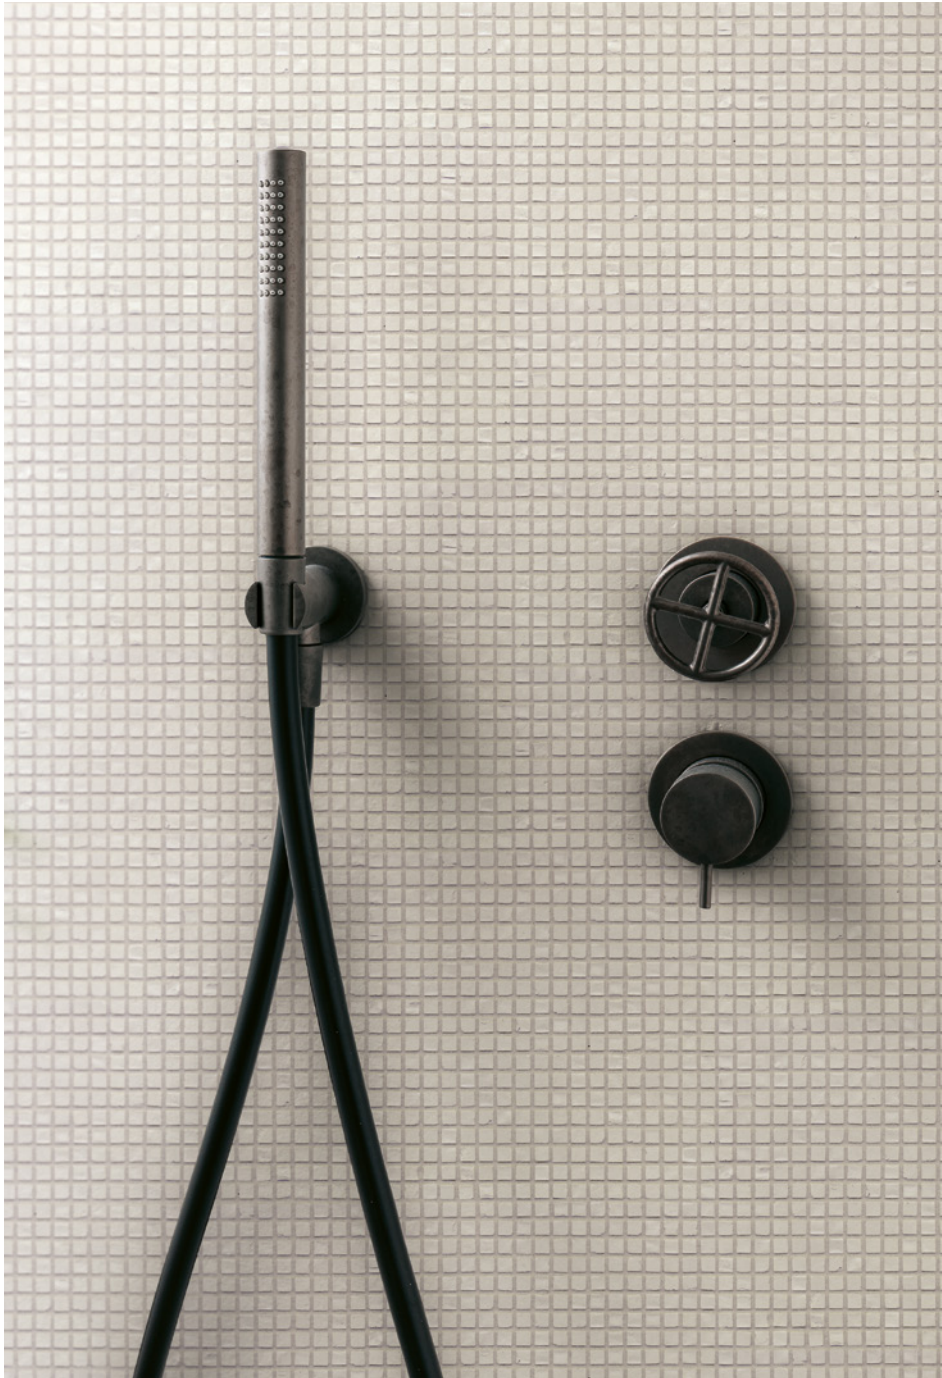

Wall: DMAG 172 Dust Mosaic Matt



Floor: DMAG 184 Dust Natural



DMAG 172 Dust



DMAG 173 Sand



DMAG 174 Lithos



DMAG 175 Fossil



DMAG 176 Dust



DMAG 177 Sand



DMAG 178 Lithos



DMAG 179 Fossil



DMAG 180 Dust



DMAG 181 Sand



DMAG 182 Lithos



DMAG 183 Fossil



DMAG 184 Dust



DMAG 185 Sand



DMAG 186 Lithos




DMAG 187 Fossil




DMAG 188 Dust



DMAG 189 Sand




DMAG 190 Lithos



DMAG 191 Fossil


Sizes

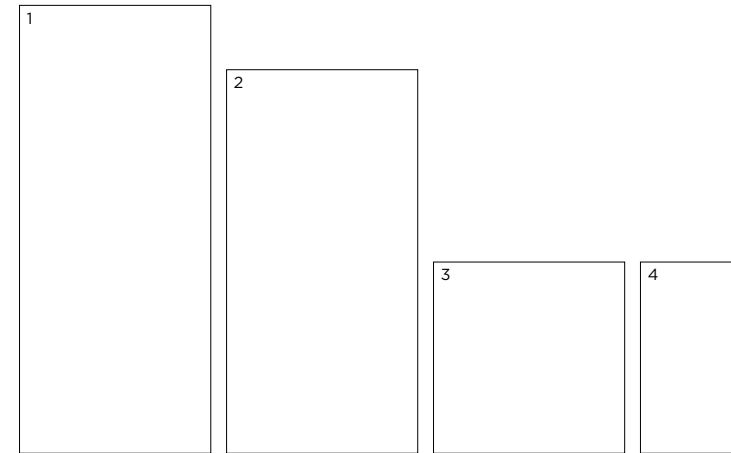

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Natural Bush Hammered	DMAG 172, 175, 176, 179, 180, 183, 184, 187, 188 & 191 DMAG 174, 178, 182, 186 & 190
2	2397 x 1197 (R)	6	Natural Bush Hammered Natural Grip	DMAG 172, 173, 175-177, 179-181, 183-185, 187-189 & 191 DMAG 174, 178, 182, 186 & 190 DMAG 173, 177, 181, 185 & 189
3	1197 x 1197 (R)	6	Natural Bush Hammered Natural Grip	DMAG 172, 173, 175-177, 179-181, 183-185, 187-189 & 191 DMAG 174, 178, 182, 186 & 190 DMAG 173, 177, 181, 185 & 189
4	1197 x 597 (R)	6	Natural Bush Hammered Natural Grip	DMAG 172, 173, 175-177, 179-181, 183-185, 187-189 & 191 DMAG 174, 178, 182, 186 & 190 DMAG 173, 177, 181, 185 & 189


(R) Rectified size - square edge with bevel. Mosaics shown on next page.

Swatch colours may vary from original. Samples should be requested.




DOMUS


Mosaics & Special Pieces

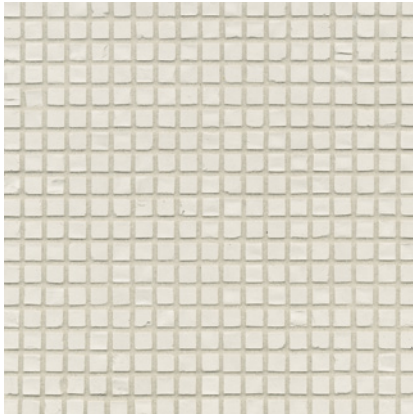


DMAG 172 Dust Mosaic

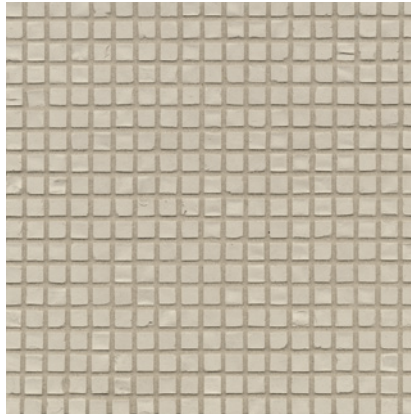


DMAG 176 Dust Mosaic

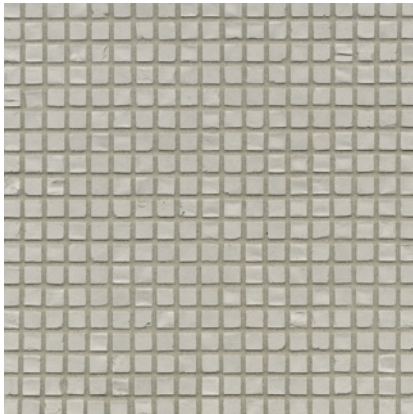


DMAG 180 Dust Mosaic

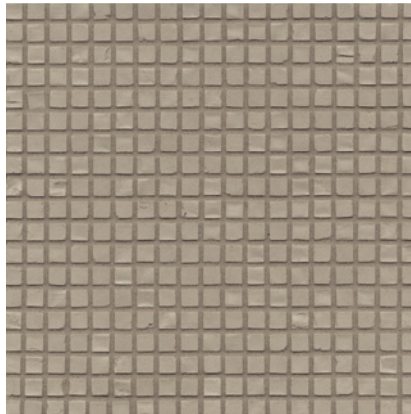

DMAG 184 Dust Mosaic

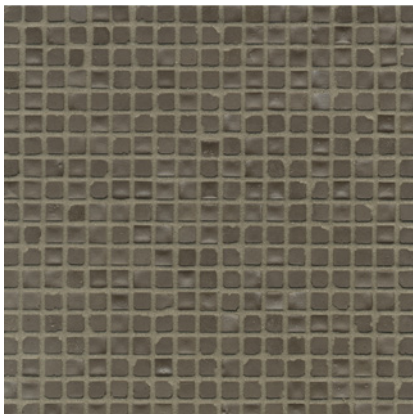

DMAG 188 Dust Mosaic

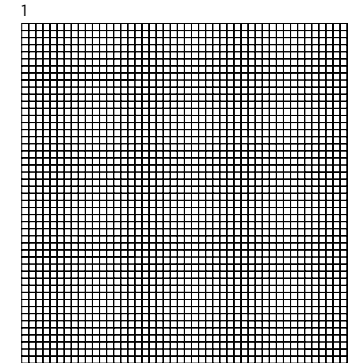

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 5.7 x 5.7 on 288 x 288 sheet	3	Matt	DMAG 172, 176, 180, 184 & 188
	Skirting 597 x 46 (R)	6	Natural Bush Hammared	DMAG 172, 173, 175-177, 179- 181, 183-185, 187-189 & 191 DMAG 174, 178, 182, 186 & 190

Swatch colours may vary from original. Samples should be requested.

V2 - Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Sensi Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R10 from 10° to 19°	Natural Natural Grip & Bush Hammered
Areas with bare feet	DIN 51097	B over 18° to 24°	Bush Hammered
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 4 – Natural Grip & Bush Hammered Class 5 – Natural
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			DMAG 187 – 0% DMAG 174 – 16% ALL OTHER COLOURS – 20.5%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com