

# Din

Porcelain Minimal



8 Colours / 2 Finishes / 2 Sizes / 2 Mosaics

Din is a minimal-effect porcelain range representing an entirely new approach to modern mosaics. The range is designed in a loosely modular format, allowing experimenting with the elements and offering a wide range of possibilities.

Design Konstantin Grcic

MU  
TIN  
A






Wall: DMDIN 02 Matt, DMDIN 02 Glossy, DMDIN 02 Mosaic Matt & DMDIN 02 Mosaic Glossy



Floor: DMDIN 05 Mosaic Matt

# Sizes



DMDIN 01 Matt



Glossy




DMDIN 03 Matt



Glossy



DMDIN 02 Matt



Glossy



DMDIN 05 Matt



Glossy




DMDIN 04 Matt



Glossy




DMDIN 07 Matt



Glossy



DMDIN 06 Matt




Glossy



DMDIN 08 Matt




Glossy

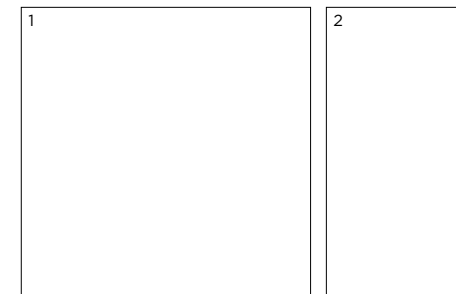


	Size (mm)	Thickness	Finish	Colour Availability
1	151 x 151 (N)	9	Matt Glossy	All colours All colours
2	151 x 75 (N)	9	Matt Glossy	All colours All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. Mosaics shown on next page.




Mosaic 75 x 75mm




DMDIN 01 Matt




Glossy



DMDIN 03 Matt




Glossy




DMDIN 02 Matt




Glossy



DMDIN 05 Matt



Glossy




DMDIN 04 Matt



Glossy




DMDIN 07 Matt



Glossy



DMDIN 06 Matt



Glossy




DMDIN 08 Matt




Glossy


Mosaic 75 x 36.5mm



DMDIN 02 Matt



DMDIN 05 Glossy




DMDIN 07 Matt




DMDIN 08 Glossy

# Mosaics

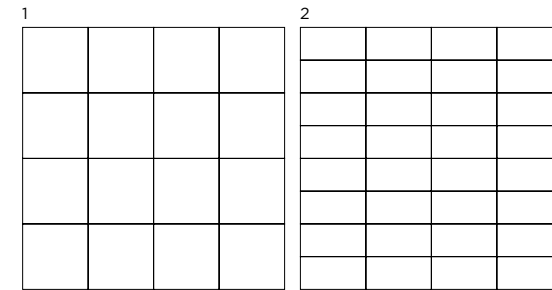

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 75 x 75 on 304 x 304 sheet	9	Matt Glossy	All colours All colours
2	Mosaic 75 x 36.5 on 304 x 304 sheet	9	Matt Glossy	All colours All colours

Swatch colours may vary from original. Samples should be requested.  
Special pieces shown on next page.



# Special Pieces



Corner Piece (A)



Corner Piece (B)



Special Corner Piece (C)



Special Corner Piece (D)



Special Listello Piece (E)



Special Listello Piece (F)

	Size (mm)	Thickness	Finish	Colour Availability
1	Corner Piece (A) 39 x 39	39	Matt Glossy	All colours All colours
2	Corner Piece (B) 45 x 45	45	Matt Glossy	All colours All colours
3	Special Corner Piece (C) 74 x 74	39	Matt Glossy	All colours All colours
4	Special Corner Piece (D) 74 x 74	45	Matt Glossy	All colours All colours
5	Special Listello Piece (E) 150.5 x 39	39	Matt Glossy	All colours All colours
6	Special Listello Piece (F) 150.5 x 45	45	Matt Glossy	All colours All colours

Swatch colours may vary from original. Samples should be requested.



V2 - Moderate  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Din

## Technical Data

**Product Type: Glazed Ceramic (BS EN 14411 – Group BIb)**

**Use: Floors & Walls**

**Product Code: DMDIN**

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Matt (151 x 151mm & 151 x 75mm) Matt (304 x 304mm)
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Matt (151 x 151mm & 151 x 75mm) Matt (304 x 304)
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	0.5% < Eb ≤ 3%	2.5 % (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1100 N	Conforms
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	3 = DMDIN 02 – 08 (Matt) 4 = DMDIN 01 (Matt)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			0%

**\*PEI classifications**  
PEI 1 – Very light traffic  
PEI 2 – Light traffic  
PEI 3 – Light to moderate traffic  
PEI 4 – Moderate to heavy traffic  
PEI 5 – Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. February 2024

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com