

Puzzle

Porcelain Design



Floor: DMPE 06 Edge Décor Matt

10 Colours / 1 Finish / 1 Size / 2 Décors


Puzzle is a graphic patterned porcelain tile range featuring bold geometric forms. Created by British design duo Edward Barber and Jay Osgerby. Endless combinations of abstract shapes possible.

Design Barber & Osgerby

Mutina



Wall: DMPU 10 & DMPX 06 Mix Décor Matt
Floor: DMPU 01 & DMPX 06 Mix Décor Matt

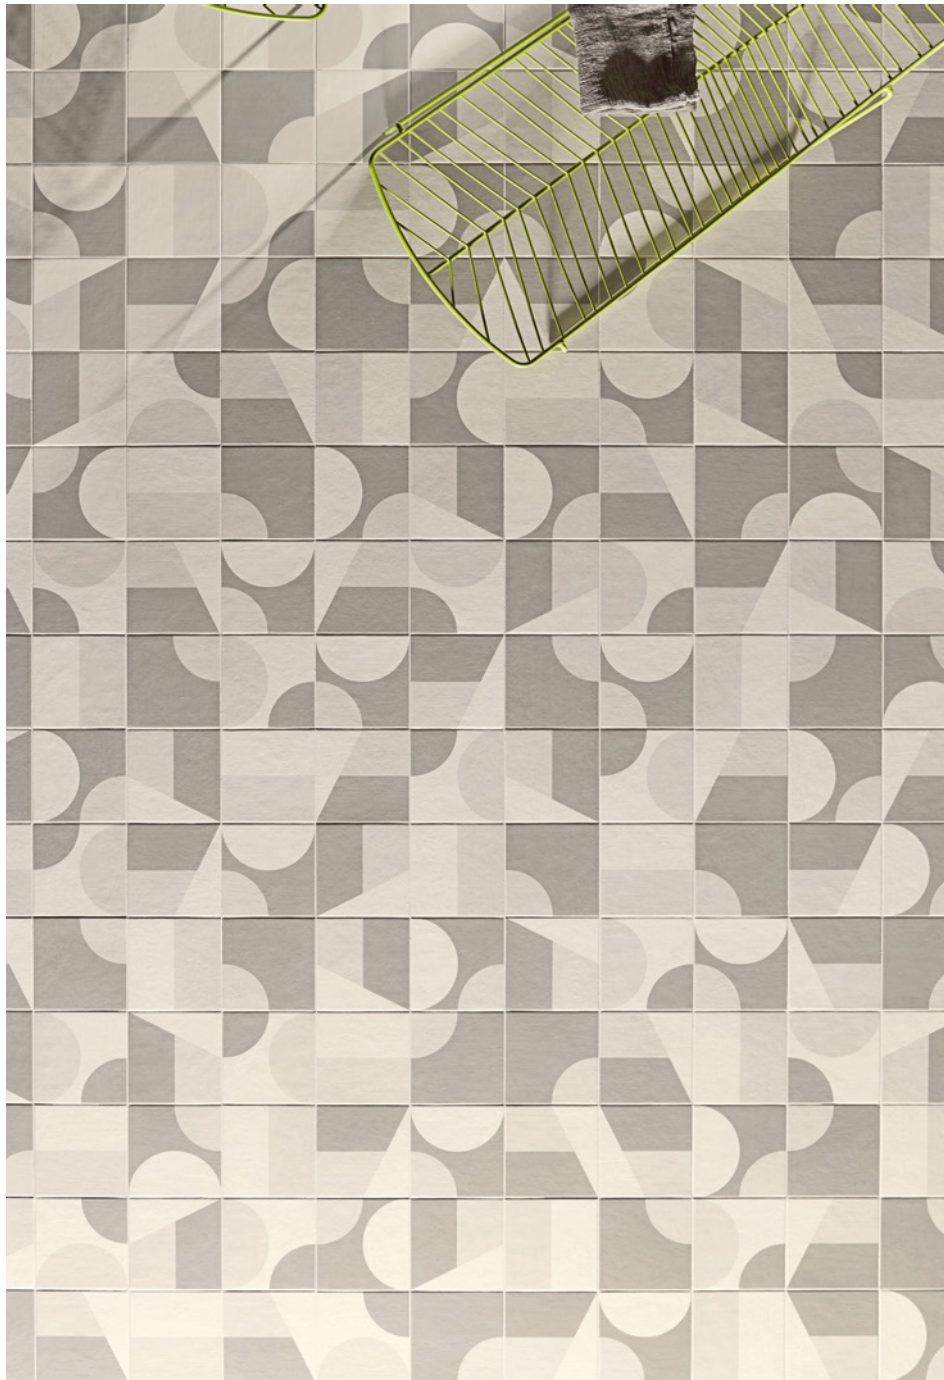

Floor: DMPX 02 Mix Décor Matt



Left Wall: DMPE 09 Edge Décor Matt
Right Wall: DMPX 08 Mix Décor Matt
Centre Wall & Floor: DMPE 09 Matt



DMPU 12



DMPU 06



DMPU 08



DMPU 01



DMPU 02



DMPU 04



DMPU 07



DMPU 09




DMPU 10




DMPU 13

Sizes



	Size (mm)	Thickness	Finish	Colour Availability
1	250 x 250 (N)	14	Matt	All DMPU colours
	Edge Décor 250 x 250	14	Matt	All DMPE colours
	Mix Décor 250 x 250	14	Matt	All DMPX colours
	Plinth Skirting 250 x 125	14	Matt	All DMPU colours


(N) Nominal size – pressed edge. Décors shown on next page.
Swatch colours may vary from original. Samples should be requested.




V1 - Low
Shade Variation

DOMUS


service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

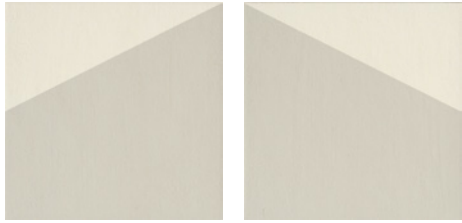

DMPE 02 Edge Décor

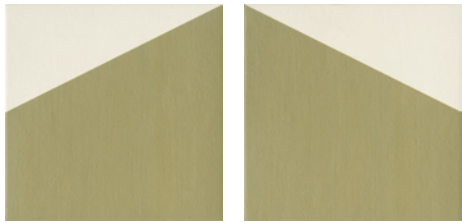


DMPE 06 Edge Décor

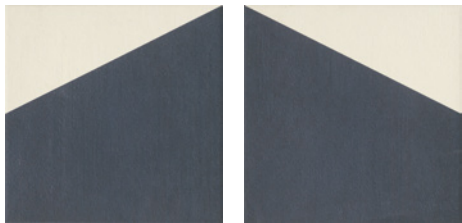


DMPE 10 Edge Décor




DMPE 13 Edge Décor

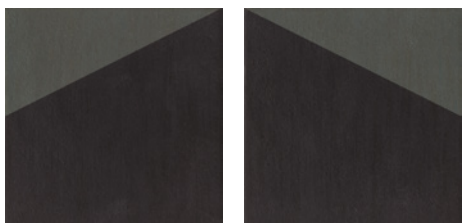


DMPE 09 Edge Décor

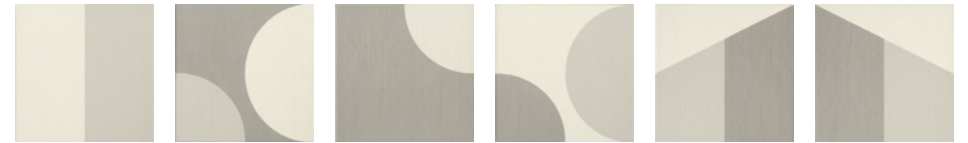

DMPX 02 Mix Décor

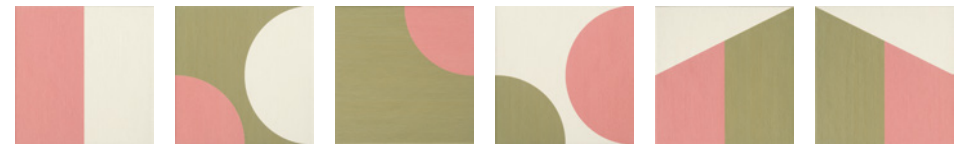

DMPX 04 Mix Décor

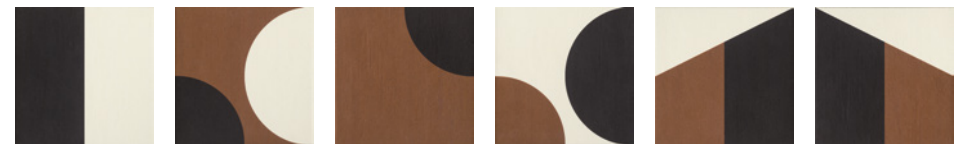

DMPX 05 Mix Décor



DMPX 06 Mix Décor



DMPX 08 Mix Décor

Puzzle

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMPU / DMPE / DMPX

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Matt
Areas with bare feet	DIN 51097	C over 24°	Matt
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	3 = DMPU 07, 09, 10, 13 4 = DMPU 02, 04, 05, 06, 08 & 12 5 = DMPU 01
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			20%

*PEI classifications
 PEI 1 - Very light traffic
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com