

Allure Slim

Lightweight Slabs / Porcelain Stone



Floor: DLRES 03 Soft Textured

4 Colours / 1 Finish / 1 Size

With delicate, thoughtful graphics, Allure Slim provides a true stone replica with a serene ambience. It can be combined with the subtle textures of Allure Wall to create a considered, tranquil aesthetic. Refer to Allure for 9mm-thick tile alternatives with mosaic options.



Wall & Floor: DLRES 04 Soft Textured




DLRES 05



DLRES 02



DLRES 03

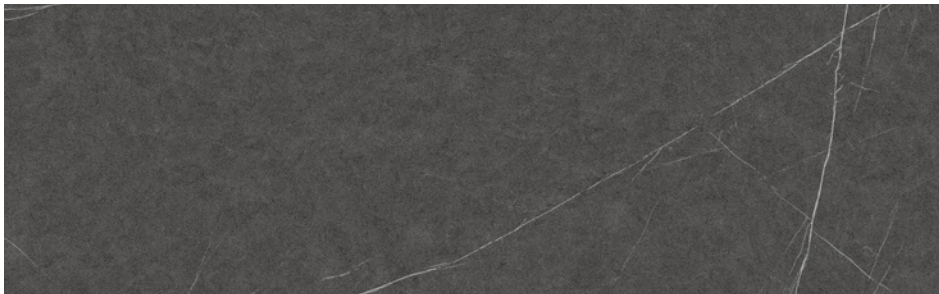


DLRES 04

Sizes




	Size (mm)	Thickness	Finish	Colour Availability
1	2698 x 1198 (R)	6	Soft Textured	All colours

(R) Rectified size - squared edge with bevel.
Swatch colours may vary from original. Samples should be requested.



V2 - Moderate Shade Variation

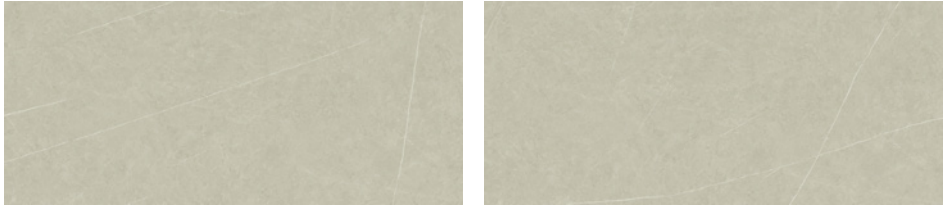

DLRES 05





DLRES 02







DLRES 03

2698mm

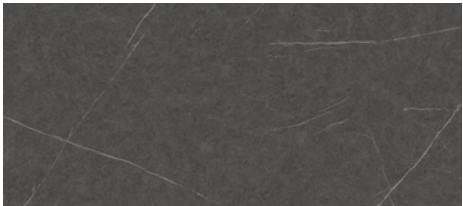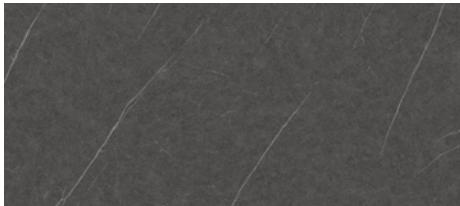

198mm

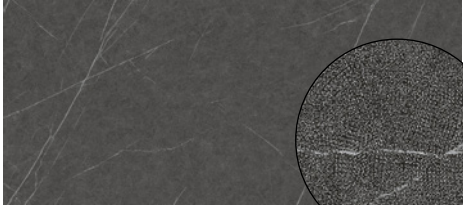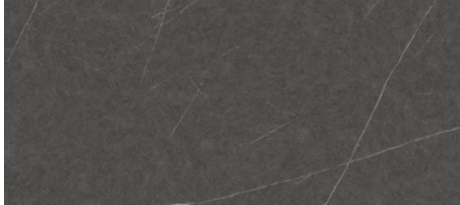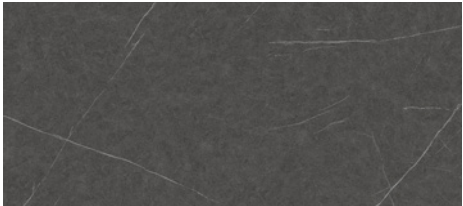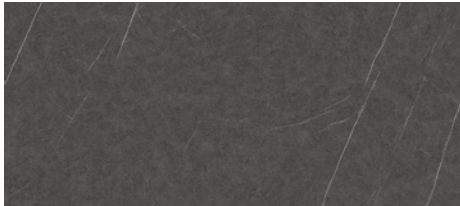

DLRES 04

Allure Slim

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DLRES

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Soft Bush Hammered
Areas with bare feet	DIN 51097	A over 12° to 18°	Soft Bush Hammered
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.5% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	> 50 N/mm ²
Breaking strength	BS EN ISO 10545-4	< 7.5mm ≥ 700 N	> 1000 N
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			30%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com