

# Amazonia

*Ceramic Colours*



9 Colours / 1 Finish / 2 Sizes

Amazonia displays multi-tonal shade variations with metallic effects, offering a contemporary and vibrant look. Each colour in the range has 20 variations—this, combined with the glossy, irregular finish, instantly adds liveliness and energy to the space.






Wall: DEAM 06 Gloss




Wall: DEAM 04 Gloss

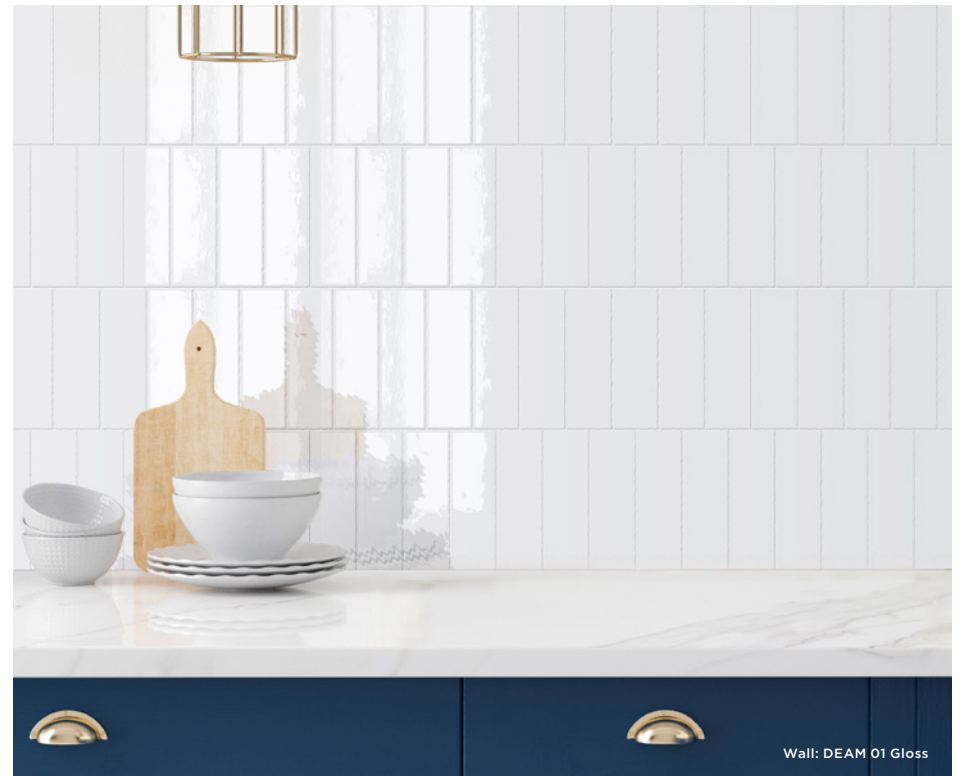

Wall: DEAM 01 Gloss

# Sizes

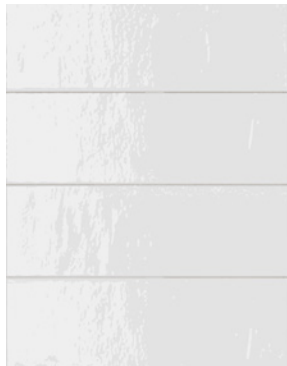

DEAM 01



DEAM 02



DEAM 03



DEAM 04



DEAM 05



DEAM 06




DEAM 07



DEAM 08




DEAM 09

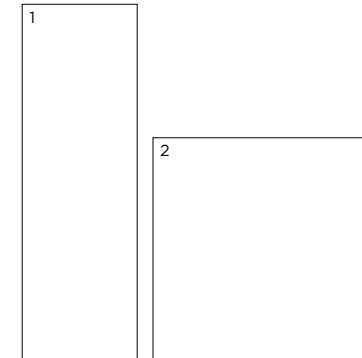

	Size (mm)	Thickness	Finish	Colour Availability
1	200 x 65 (N)	8	Gloss	All colours
2	125 x 125 (N)	8	Gloss	All colours

(N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested. A box contains 48 pieces, which is made up of a random selection of 20 different surface patterns (4 of which are shown here). Patterns cannot be picked.



# Amazonia

## Technical Data

**Product Type:** Glazed Ceramic (BS EN 14411 – Group BIII)

**Use:** Walls (Internal only)

**Product Code:** DEAM

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤ <i>N</i> < 150mm	<i>N</i> ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warping	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm <sup>2</sup>	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			61%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. June 2021

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com