

# Le Gers

Porcelain Stone



Floor: DSLE 03 Natural

**3 Colours / 3 Finishes / 5 Sizes & 1 Mix of 4 Sizes / 1 Mosaic**

Inspired by reclaimed limestones used in historical châteaux and churches in the ancient regions of Southern France, Le Gers is a porcelain tile range suitable for wall and floor applications. The warm and soft colours of these stone-effect tiles evoke cosy and prestigious atmospheres giving spaces a strong and fancy character.



Floor: DSLE 02 Natural





Floor: DSLE 01 Natural & DSLE 01 Mix Tumbled



Floor: DSLE 01 Natural





DSLE 01




DSLE 02



DSLE 03

# Sizes

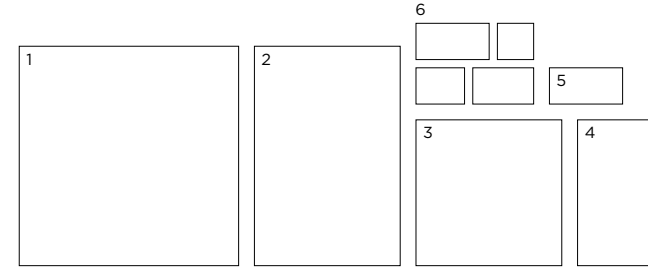

	Size (mm)	Thickness	Finish	Colour Availability
1	894 x 894 (R)	10	Natural Anti-Slip	All colours All colours
2	894 x 595 (R)	10	Natural Anti-Slip	All colours All colours
3	595 x 595 (R)	10	Natural Anti-Slip	All colours All colours
4	595 x 296 (R)	10	Natural Anti-Slip	All colours All colours
5	300 x 150 (N)	10	Tumbled	All colours
6	Mix of sizes 300 x 150 (N) 250 x 150 (N) 200 x 150 (N) 150 x 150 (N)	10	Tumbled	All colours

(R) Rectified size - square edge with bevel. (N) Nominal size - pressed edge.  
Swatch colours may vary from original. Samples should be requested.

# Mosaics & Special Pieces



DSLE 01 Mosaic




DSLE 02 Mosaic



DSLE 03 Mosaic




Splashback: DSLE 01 Mosaic Natural



	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 (N) on 300 x 300 sheet	10	Natural	All colours
	Skirting 894 x 80 (R)	10	Natural	All colours
	Skirting 595 x 80 (R)	10	Natural	All colours
	Bullnose Step Tread 894 x 330 (R)	10	Natural Anti-Slip	All colours All colours
	Bullnose Step Tread 595 x 330 (R)	10	Natural Anti-Slip	All colours All colours

(R) Rectified size - square edge with bevel. (N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



**DOMUS**



## Tumbled Finish & Mixed Sizes

---



DSLE 02 Mix Tumbled

Mix of sizes:  
300 x 150 x 10mm (N)  
250 x 150 x 10mm (N)  
200 x 150 x 10mm (N)  
150 x 150 x 10mm (N)



DSLE 02 Tumbled


300 x 150 x 10mm (N)

## V3 - High Shade Variation

---



DSLE 03 Natural

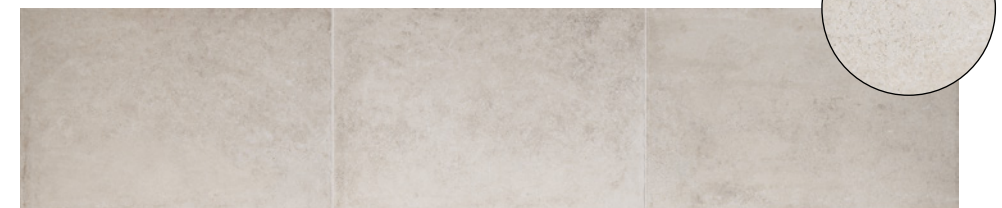

DSLE 01 Natural

# Le Gers

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DSLE

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19° R11 from 19° to 27°	Natural Anti-Slip
Areas with bare feet	DIN 51097	B over 18° to 24°	Anti-Slip
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ MK-1
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance:			
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 - glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	
Recycled content			> 40%

**\*PEI classifications**  
 PEI 1 - Very light traffic  
 PEI 2 - Light traffic  
 PEI 3 - Light to moderate traffic  
 PEI 4 - Moderate to heavy traffic  
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com