

# Country


*Ceramic Colours*



11 Colours / 2 Finishes / 4 Sizes

Country is a ceramic wall tile range with rough-cut edges and an undulating glazed surface. Ideal for adding a rustic touch or industrial aesthetic to interior spaces. The glazed finish reflects the light for a sophisticated ambience.



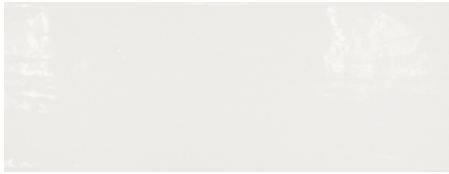


DQC 01




DQC 02



DQC 06

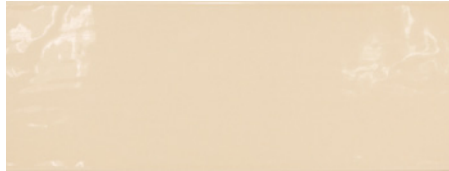

DQC 03

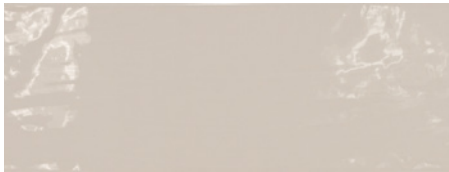

DQC 07



DQC 04



DQC 08



DQC 10



DQC 11




DQC 09




DQC 05

# Sizes

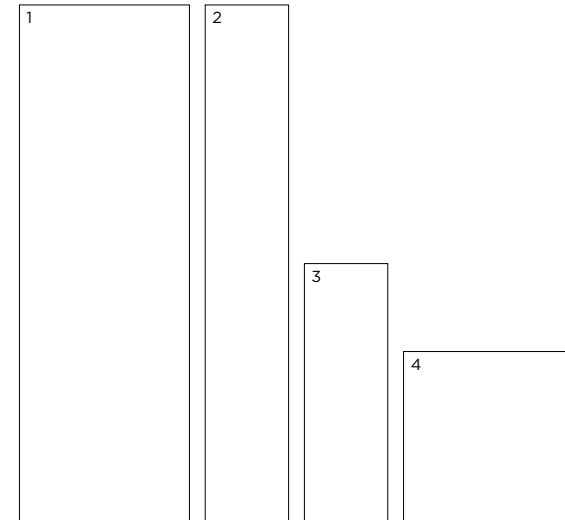

	Size (mm)	Thickness	Finish	Colour Availability
1	400 x 132 (N)	8	Glazed Matt	All colours DQC 01 & 05
2	400 x 65 (N)	8	Glazed Matt	All colours DQC 01 & 05
3	200 x 65 (N)	8	Glazed Matt	All colours DQC 01 & 05
4	132 x 132 (N)	8	Glazed	DQC 01, 02, 03, 04, 05 & 06

(N) Nominal size – pressed edge. Swatch colours may vary from original. Samples should be requested. Recommended for use on walls only.



# Country

Technical Data

**Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)**

**Use: Walls (Internal only)**

**Product Code: DQC**

## DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.75mm -0.5mm	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.75mm	± 0.5% (max. ± 2.0mm)	Conforms

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			31%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2020

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com