

Unicolor

Ceramic Colours



Wall: DRUL 02 Matt & Gloss

7 Colours / 2 Finishes / 2 Sizes


An essential range of solid-colour ceramic wall tiles in a palette of neutral tones. Available in matt and gloss finishes, Unicolor is a modern high-quality industrial range created for budget conscientious projects. For coordinating floor tiles, refer to Flow 2.0.




Wall: DRUL 15 Matt




Sizes



DRUL 14

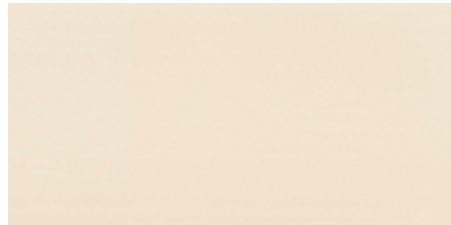


DRUL 02



DRUL 01




DRUL 06

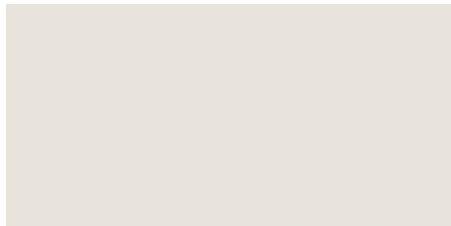


DRUL 04



DRUL 13



DRUL 15

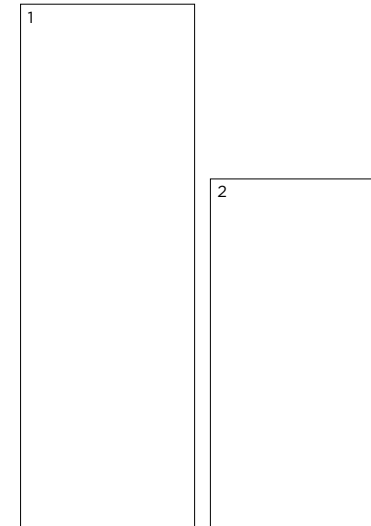

	Size (mm)	Thickness	Finish	Colour Availability
1	889 x 295 (R)	12.3	Matt Gloss	DRUL 01, 02, 04, 14 & 15 DRUL 01 & 02
2	592 x 295 (R)	9	Matt Gloss	DRUL 01, 02, 04, 14 & 15 DRUL 01, 02, 04, 06 & 13

(R) Rectified size - square edge with bevel. For wall use only.
Swatch colours may vary from original. Samples should be requested.

Unicolor

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DRUL

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.3%
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	± 0.2%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.3%
Planarity (flatness):	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	+ 0.3% - 0.2%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	> 16 - 19% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	> 19 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	> 800 N (Typical value)
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			0%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. July 2020



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com