

Pure Travertine

Porcelain Marble



3 Colours / 3 Finishes / 7 Sizes / 1 Mosaic

Reinterpreting one of the most timeless marbles, Pure Travertine inherits all the elegance and suaveness of travertine in a new minimalistic concept. This porcelain tile range adopts a mineral effect with delicate nuances in a selection of contemporary colours to create comfortable and harmonious spaces.





Floor: DAZP 01 Natural



Floor: DAZP 03 Natural



DAZP 01




DAZP 02



DAZP 03


Sizes

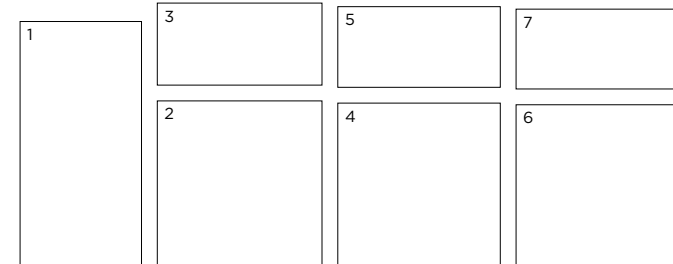

	Size (mm)	Thickness	Finish	Colour Availability
1	888 x 443 (R)	10	Natural Polished	All colours All colours
2	600 x 600 (N)	10	Natural Natural Grip	All colours All colours
3	600 x 300 (N)	8.5	Natural	All colours
4	592 x 592 (R)	10	Natural Natural Grip	All colours All colours
5	592 x 295 (R)	8.5	Natural	All colours
6	586 x 586 (R)	10	Polished	All colours
7	586 x 292 (R)	10	Polished	All colours

(R) Rectified size – square edge with bevel. (N) Nominal size – pressed edge.
Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.

Mosaic 47 x 47mm



DAZP 01 Mosaic



DAZP 02 Mosaic




DAZP 03 Mosaic




Floor: DAZP 02 Polished

Mosaics & Special Pieces



	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 47 x 47 on 295 x 295 sheet	8.5	Natural	All colours
	Skirting 443 x 80 (R)	10	Natural Polished	All colours All colours
	Skirting 592 x 80 (R)	8.5	Natural	All colours
	Skirting 586 x 80 (R)	10	Polished	All colours
	Skirting 600 x 80 (N)	8.5	Natural	All colours
	Bullnose Step Tread 592 x 295 (R)	8.5	Natural	All colours
	Stairstep 880 x 443 (R)	10	Natural	All colours
	Stairstep 592 x 592 (R)	10 10	Natural Natural Grip	All colours All colours
	Stairstep 586 x 586 (R)	10	Polished	All colours
	Stairstep 592 x 295 (R)	8.5	Natural	All colours
	Stairstep 600 x 600 (N)	10 10	Natural Natural Grip	All colours All colours
	Stairstep 600 x 300 (N)	8.5	Natural	All colours

(R) Rectified size - square edge with bevel. (N) Nominal size - pressed edge. Swatch colours may vary from original. Samples should be requested.



DOMUS

Pure Travertine

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DAZP

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Natural Natural Grip
Areas with bare feet	DIN 51097	B over 18° to 24° C over 24°	Natural Natural Grip
Slip resistance (Pendulum) Coefficient of friction	BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.5% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	≥ 40 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	≥ 1750 N (Typical value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	Class 4
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			15%

*PEI classifications

PEI 1 – Very light traffic

PEI 2 – Light traffic

PEI 3 – Light to moderate traffic

PEI 4 – Moderate to heavy traffic

PEI 5 – Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. June 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com