


Seta

Ceramic Colours

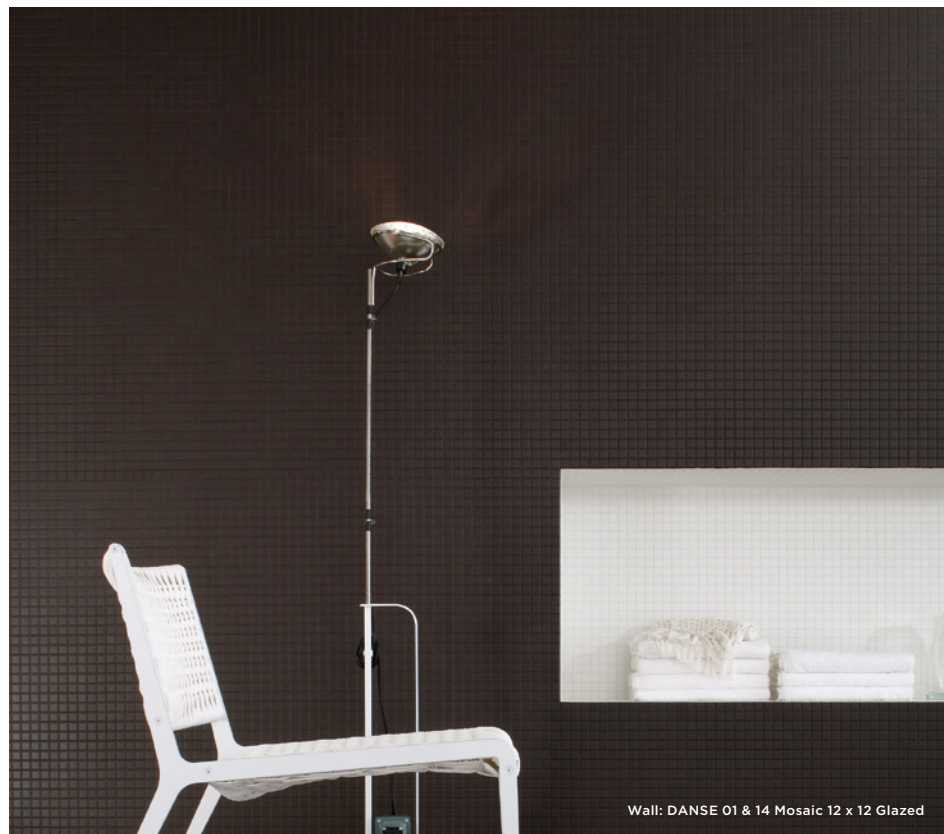

22 Colours / 1 Finish / 3 Mosaics

Seta is a range of ceramic glazes characterised by different surface finishes and hues. Sophisticated colours for a multitude of design needs for residential, commercial and well-being settings.





Back Wall: DANSE 14 Mosaic 12 x 12 Glazed
Front Wall: DANSE 01 Mosaic 100 x 50 Glazed



Back Wall: DANSE 08 Mosaic 12 x 12 Glazed
Front Wall: DANSE 07 Mosaic 25 x 25 Glazed




Back Wall: DANSE 14 Mosaic 12 x 12 Glazed
Front Wall: DANSE 01 Mosaic 100 x 50 Glazed




Wall: DANSE 06 Mosaic 12 x 12 Glazed

Mosaics

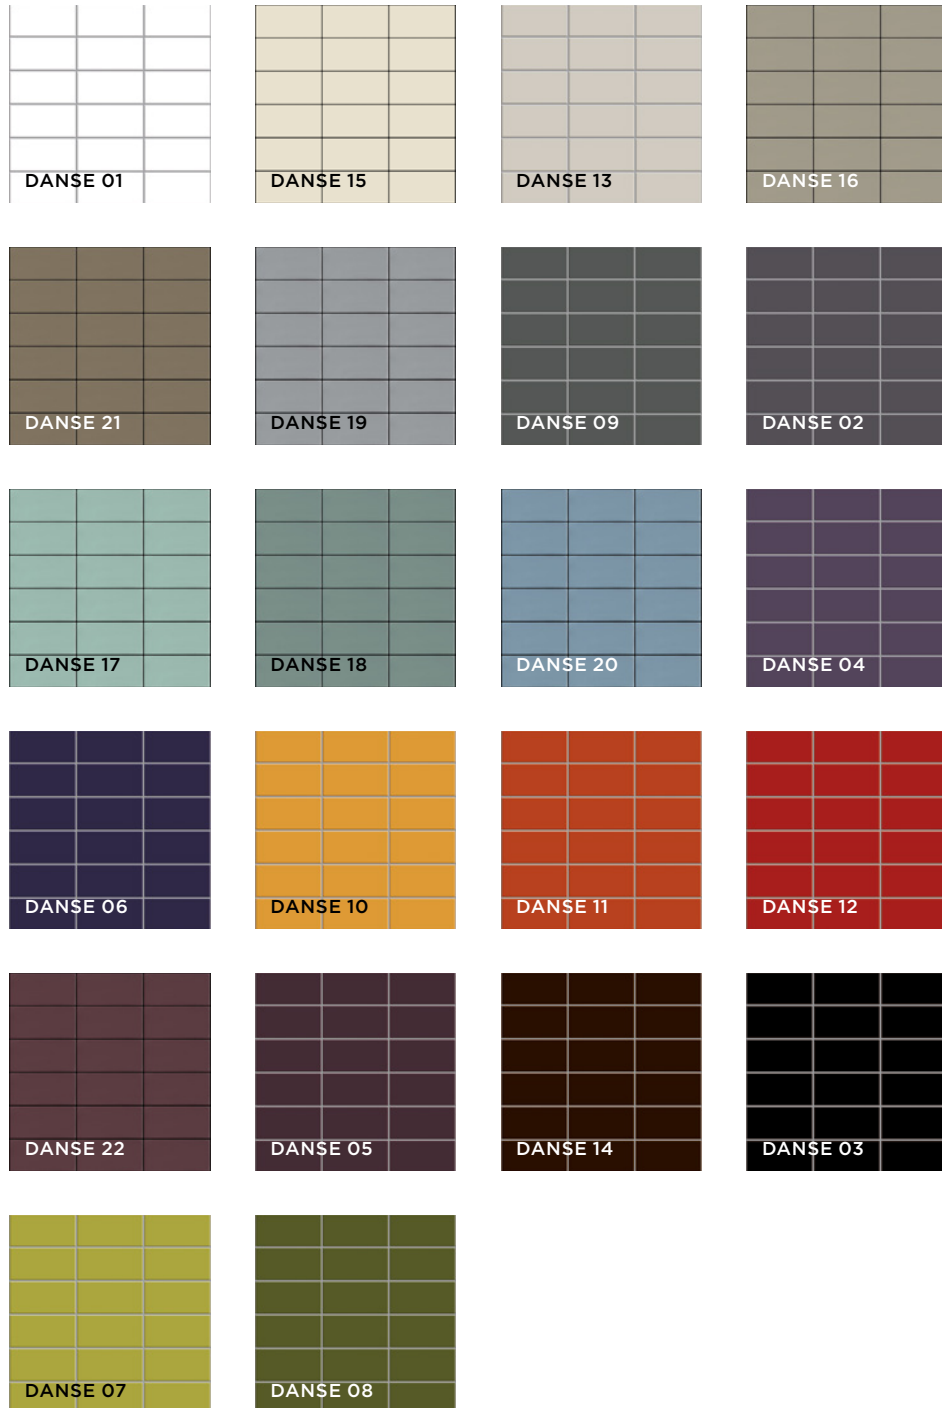


Colours above shown in Mosaic 100 x 50 format.

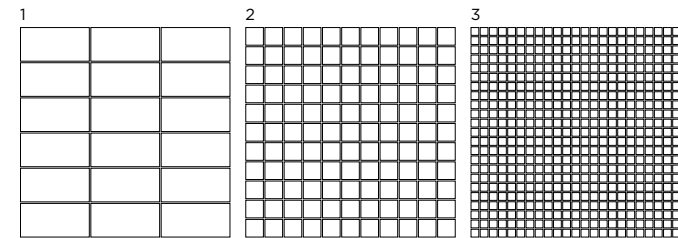

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 100 x 50 on 300 x 300 sheet	7.2	Glazed	All colours
2	Mosaic 25 x 25 on 300 x 300 sheet	7.2	Glazed	All colours
3	Mosaic 12 x 12 on 300 x 300 sheet	7.2	Glazed	All colours

Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Seta

Technical Data

Product Type: Glazed Ceramic Mosaic (BS EN 14411 – Group B1b)

Use: Walls & Light Traffic Domestic Floors

Product Code: DANSE

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size N)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max.±2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max.±0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max.±1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max.±2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ±2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10°	Glazed
Areas with bare feet	DIN 51097	A over 12° to 18° B over 18° to 24°	Glazed 25 x 25 & 50 x 100mm Glazed 12 x 12mm
Slip resistance Coefficient of friction	BS. 7976-2	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Feb 2022

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	0.5% < Eb ≤ 3%	≤ 1% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 30 N/mm ²	> 50 N/mm ² (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	> 1800 N (Typical value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	<u>Class 2:</u> DANSE 02, 03, 04, 05, 06, 07, 08, 09 11, 12, 14, 18, 20, 21 & 22 <u>Class 3:</u> DANSE 10, 13, 15, 16, 17 & 19 <u>Class 5:</u> DANSE 01
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	< 7X10 ⁻⁶ /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB min.
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	Conforms
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Conforms
Colour resistance to light exposure	DIN 51094	No noticeable colour variation	Resistant
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			30%

*PEI classifications

- PEI 1 - Very light traffic
- PEI 2 - Light traffic
- PEI 3 - Light to moderate traffic
- PEI 4 - Moderate to heavy traffic
- PEI 5 - Heavy to extra heavy traffic



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com