

Heritage Luxe

Porcelain Marble




6 Colours / 2 Finishes / 2 Sizes

Inspired by the noble hues and majestic veining of marble, Heritage Luxe rediscovers the artistic and architectural heritage of inestimable cultural value we are now privileged to inherit. This porcelain tile range exhibits similarities to ancient-European palaces, sculptures, and monuments created from coloured marble.



Sizes

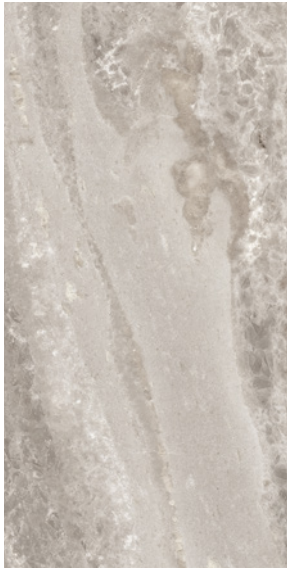

DFHE 01



DFHE 04




DFHE 02




DFHE 05



DFHE 03

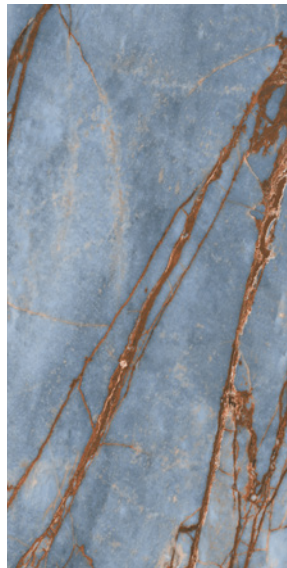

DFHE 06

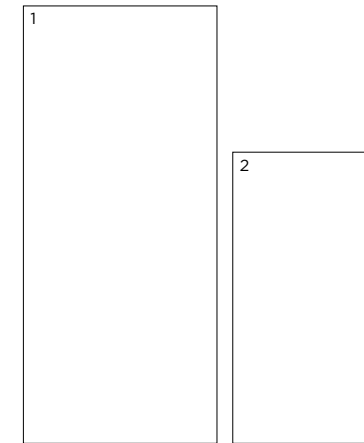

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|----------------|-----------|-----------------------|----------------------------|
| 1 | 1797 x 797 (R) | 9 | Comfort PTV Glossy | All colours All colours |
| 2 | 1197 x 597 (R) | 9 | Comfort PTV Glossy | All colours All colours |

(R) Rectified size - square edge with bevel. Special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.




Wall: DFHE 04 Glossy

Special Pieces

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|---------------------------------------|-----------|-----------------------|----------------------------|
| 1 | Plinth Skirting 597 x 46 | 9 | Comfort PTV Glossy | All colours All colours |
| 2 | Bullnose Step Tread 1197 x 33 x 30 | 9 | Comfort PTV Glossy | All colours All colours |


Swatch colours may vary from original. Samples should be requested.




DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


V2 Moderate - V3 High Shade Variation

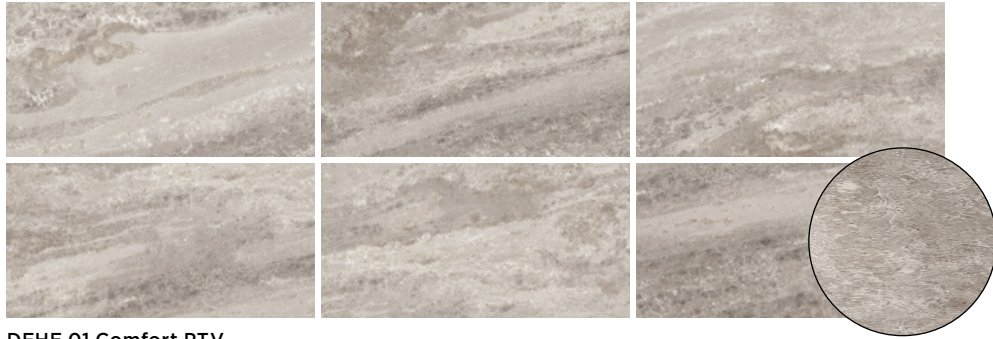

DFHE 01 Comfort PTV

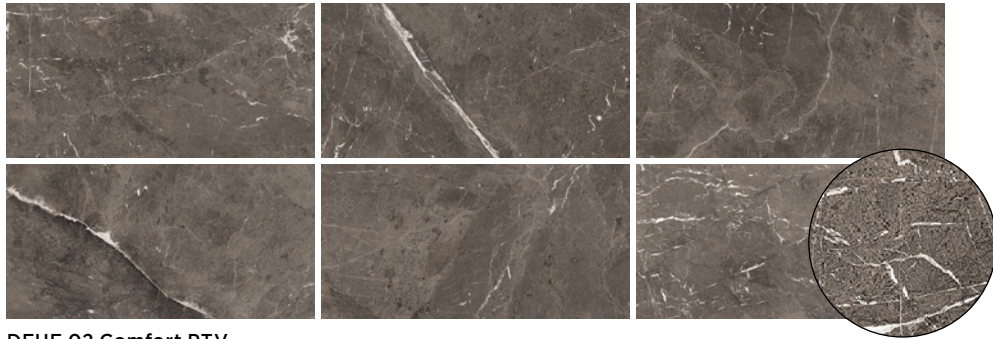


DFHE 02 Comfort PTV

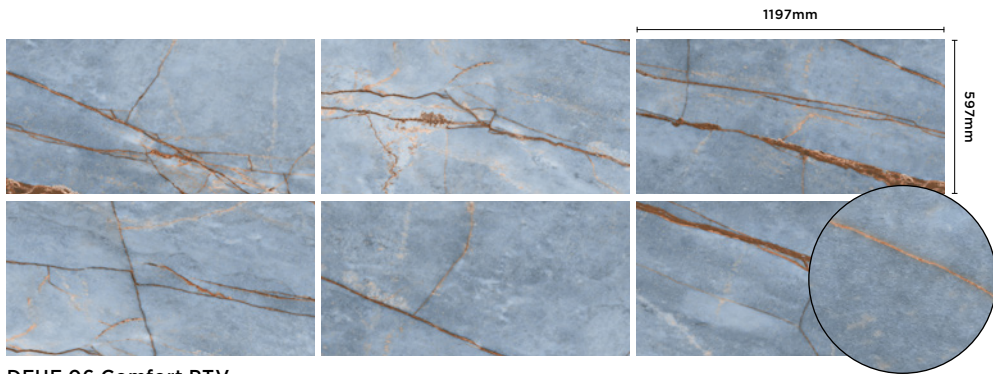


DFHE 06 Comfort PTV


V4 - Random Shade Variation

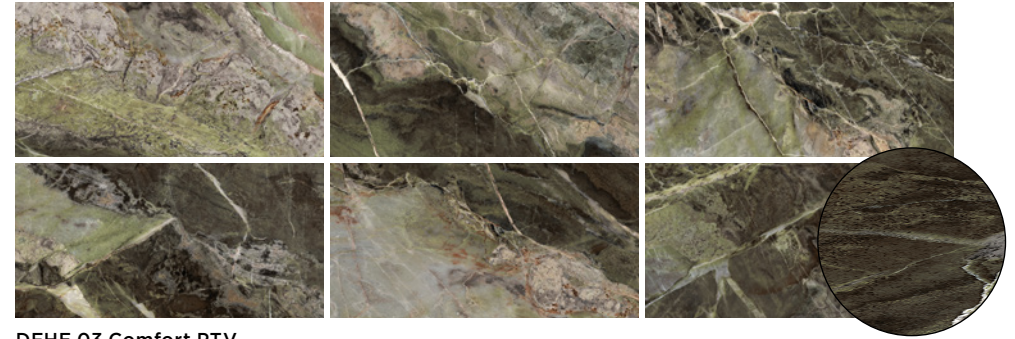

DFHE 03 Comfort PTV

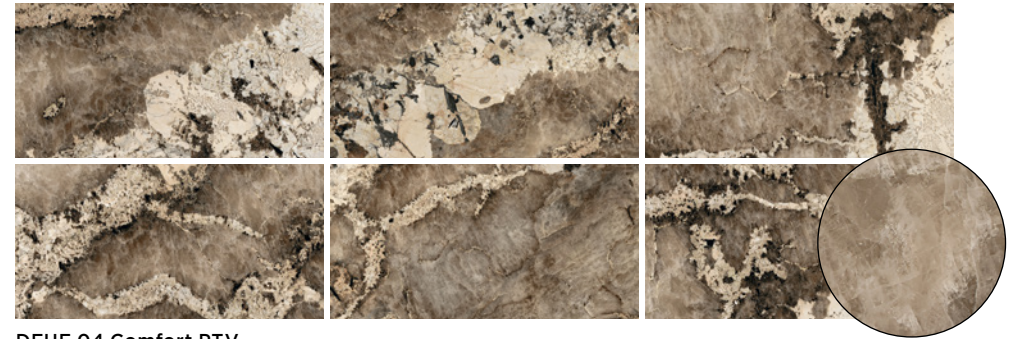

DFHE 04 Comfort PTV

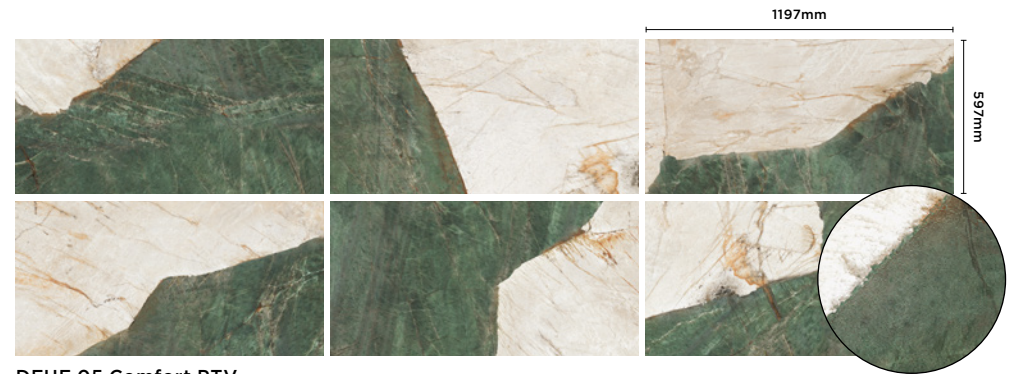

DFHE 05 Comfort PTV

Heritage Luxe

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DFHE

DIMENSION & SURFACE QUALITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|----------------------------|--------------------|------------------------|--------------|
| Length & width | BS EN ISO 10545-2 | ± 0.60% (max. ± 2.0mm) | Conforms |
| Thickness | BS EN ISO 10545-2 | ± 5% (max. ± 0.5mm) | Conforms |
| Edge straightness | BS EN ISO 10545-2 | ± 0.50% (max. ± 1.5mm) | Conforms |
| Orthogonality (squareness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | Conforms |
| Planarity (flatness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | Conforms |
| Appearance | BS EN ISO 10545-2 | > 95% | Conforms |

SLIP RESISTANCE

| Technical Characteristics | Industry Standards | Requirement | Finish |
|--|---------------------|---------------------------|-------------|
| Areas with footwear | BS EN 16165 Annex B | R10 from 10° to 19° | Comfort PTV |
| Areas with bare feet | BS EN 16165 Annex A | B over 18° to 24° | Comfort PTV |
| Slip resistance Coefficient of friction | BS EN 16165 | Test results upon request | |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|---|---|---------------------------|--|
| Water absorption | BS EN ISO 10545-3 | ≤ 0.5% | 0.08% (typical average value) |
| Modulus of rupture (bending strength) | BS EN ISO 10545-4 | ≥ 35 N/mm ² | 50 N/mm ² (typical average value) |
| Breaking strength | BS EN ISO 10545-4 | ≥ 7.5mm ≥ 1300 N | 2200 N (typical average value) |
| Resistance to deep abrasion (unglazed tiles) | BS EN ISO 10545-6 | ≤ 175 mm ³ | 140 mm ³ (typical average value) |
| Thermal shock resistance | BS EN ISO 10545-9 | No visible defects | Resistant |
| Frost resistance | BS EN ISO 10545-12 | No surface alteration | Resistant |
| Chemical resistance: Low concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | ULA – Comfort PTV ULA-ULB – Glossy |
| High concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | UHA – Comfort PTV UHA-UHB – Glossy |
| Domestic chemicals & additives for swimming pools | BS EN ISO 10545-13 | UB/GB min. | UA |
| Stain resistance | BS EN ISO 10545-14 | Declared value - unglazed | Class 4 – Glossy Class 5 – Comfort PTV |
| Reaction to fire | Based on the decision 96/603/EC and its changes | A1 _{FL} /A1 | A1 _{FL} /A1 |
| Recycled content | | | 20.5% |



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. November 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com