

# Timeless

*Porcelain Marble*




**6 Colours / 3 Finishes / 4 Sizes / 3 Mosaics**

Timeless is a stunning porcelain tile range representing the purely aesthetic and everlasting style of marble and limestone, offering an attractive surface solution for any modern lifestyle setting.



DCTM 01

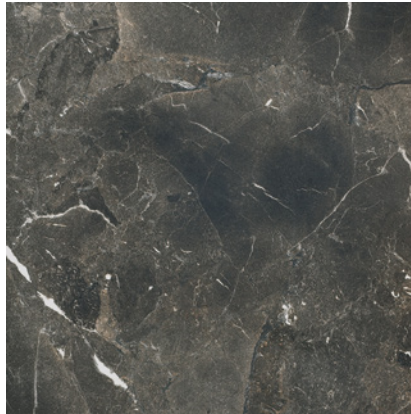

DCTM 08



DCTM 04



DCTM 05




DCTM 03



DCTM 02

# Sizes

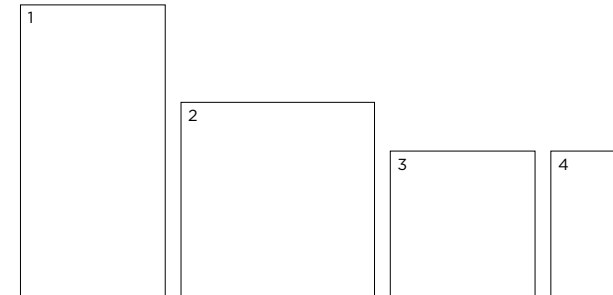


	Size (mm)	Thickness	Finish	Colour Availability
1	1197 x 597 (R)	9	Matt Lucido	All colours All colours
2	797 x 797 (R)	9	Matt Lucido	All colours All colours
3	597 x 597 (R)	9	Matt Lucido	All colours All colours
4	597 x 297 (R)	9	Matt Lucido Grip	All colours All colours All colours

(R) Rectified size – square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.



# Mosaics & Special Pieces


## 3D Mosaic



DCTM 01



DCTM 02




DCTM 03



DCTM 04




DCTM 05




DCTM 08


## Mosaic




DCTM 01



DCTM 02




DCTM 03



DCTM 04



DCTM 05



DCTM 08

## Listello Module




DCTM 01




DCTM 02



DCTM 03




DCTM 04



DCTM 05



DCTM 08

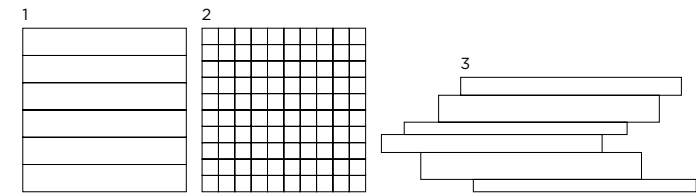

	Size (mm)	Thickness	Finish	Colour Availability
1	3D Mosaic 300 x 50 on 300 x 300 sheet	9	Matt Lucido	All colours All colours
2	Mosaic 30 x 30 on 300 x 300 sheet	9	Matt Lucido	All colours All colours
3	Listello Module on 400 x 210 sheet	9	Matt Lucido	All colours All colours
	Plinth Skirting 597 x 46	9	Matt Lucido	All colours All colours

Swatch colours may vary from original. Samples should be requested.



# Timeless

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group BIa)

**Use:** Floors & Walls

**Product Code:** DCTM

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	±0.35%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Matt Grip
Areas with bare feet	DIN 51097	B over 18° to 24°	Grip
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	50 N/mm <sup>2</sup> (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	2200 N (Average value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *see classifications below	Class 3 – DCTM 05 & 08 Class 4 – DCTM 02 – 04 Class 5 – DCTM 01
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA – Matt & Grip GLB – Lucido
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 3 – Lucido Class 4 – Matt & Grip
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			20.5%

\*PEI classifications  
 PEI 2 - Light traffic  
 PEI 3 - Light to moderate traffic  
 PEI 4 - Moderate to heavy traffic  
 PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com