

Tex

Porcelain Design



Wall: DTEX 06 Glazed

8 Colours in 3 Shades / 1 Mix of 5 Finishes / 1 Size / 1 Décor

Tex is a complex and multi-coloured range of tiles inspired by textures from the world of textiles. Choose between eight colours with each box containing a random selection of three shades & five textured finishes.

Design Raw Edges

Mutina



Wall: Runner 1 DTEX 01, 02 & 05 Glazed




DTEX 01



DTEX 02



DTEX 03




DTEX 04




DTEX 05



DTEX 06




DTEX 07




DTEX 08

Tex

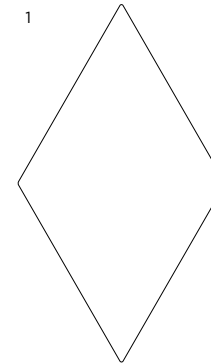

Mix of 5 glazed finishes

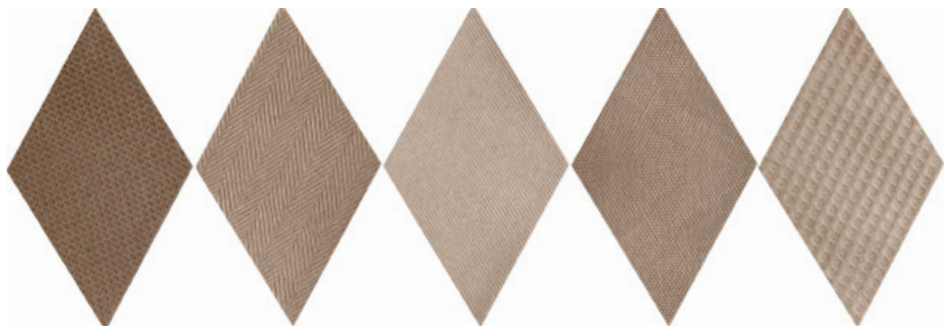

	Size (mm)	Thickness	Finish	Colour Availability
1	200 x 115	10	Glazed	All colours
2	Plinth Skirting 200 x 105	10	Glazed	All colours


Special décors (patterns) shown on next page.
 Each box contains a mix of 5 finishes and 3 colour shades.
 Print colours may vary from original. Tile samples should be requested.

V1 - Low
Shade Variation


DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com


Tex Runners

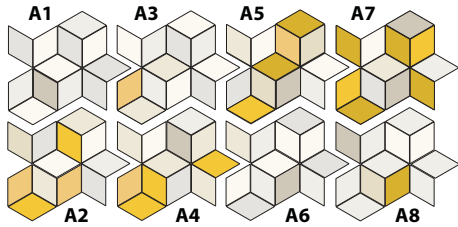


RUNNER 1 DTEX 01, 02 & 05

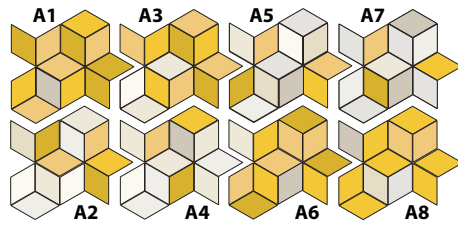


RUNNER 10 DTEX 01, 02 & 05

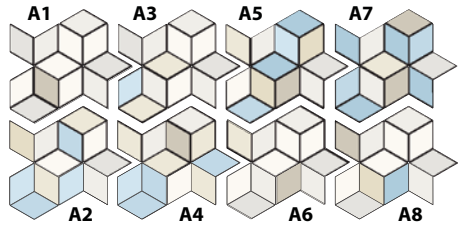


RUNNER 3 DTEX 01, 02 & 04

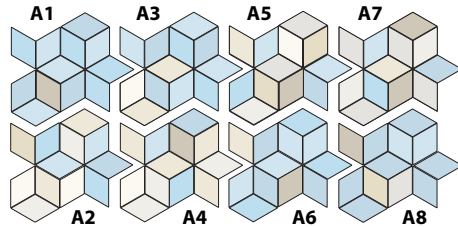


RUNNER 9 DTEX 01, 02 & 04

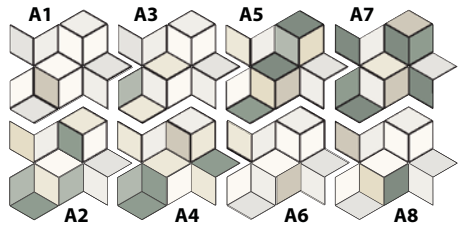


RUNNER 2 DTEX 01, 02 & 07

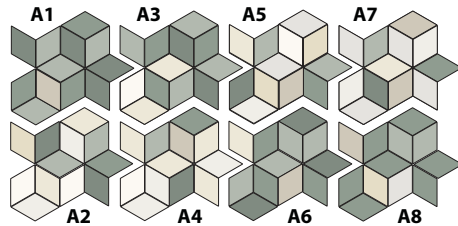


RUNNER 8 DTEX 01, 02 & 07

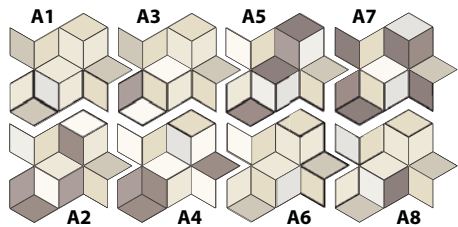


RUNNER 4 DTEX 01, 02 & 06

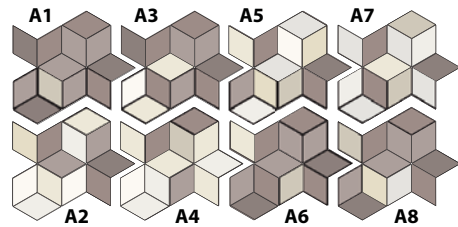


RUNNER 5 DTEX 01, 02 & 06

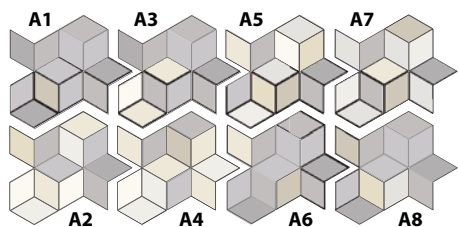

RUNNER 6 DTEX 01, 02 & 03

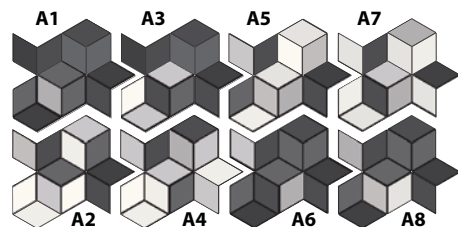

RUNNER 7 DTEX 01, 03 & 08

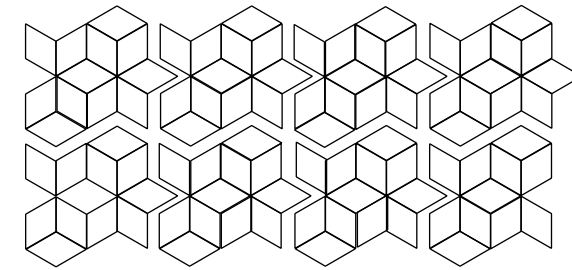

	Size (mm)	Thickness	Finish	Colour Availability
1	1640 x 710 on 500 x 460 sheet (made from 8 sheets)	10	Glazed	All colours

The 'Runner' is an element composed by 12 rhombus of different colours and textures on glue dots. Also, each 'Runner' is composed by 8 different patterns, which cannot be sold separately but are included in one single package. Print colours may vary from original. Tile samples should be requested.



Tex

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DTEX

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Glazed
Areas with bare feet	DIN 51097	C over 24°	Glazed
Slip resistance Coefficient of friction	BS 7976-2 BS EN 16165	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.04% (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			24%

