


# Trasparenze

*Ceramic Colours*

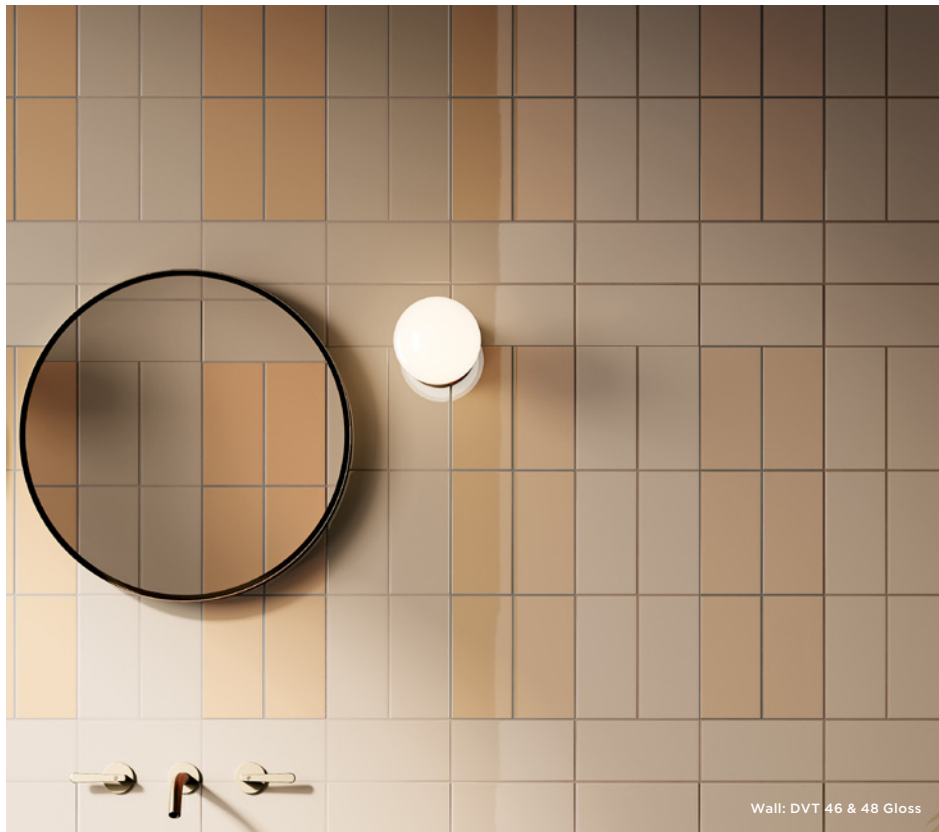


**26 Colours / 1 Finish / 4 Sizes / 6 Mosaics / 2 Décors**

Trasparenze interprets the stylistic needs of those who love to be surrounded by taste and refinement, without however renouncing the modernity of high-quality glazed stoneware. Can be combined with Interni or Flooring.





Wall: DVT 03 Mosaic & DVT 54 Triangle Mosaic Gloss

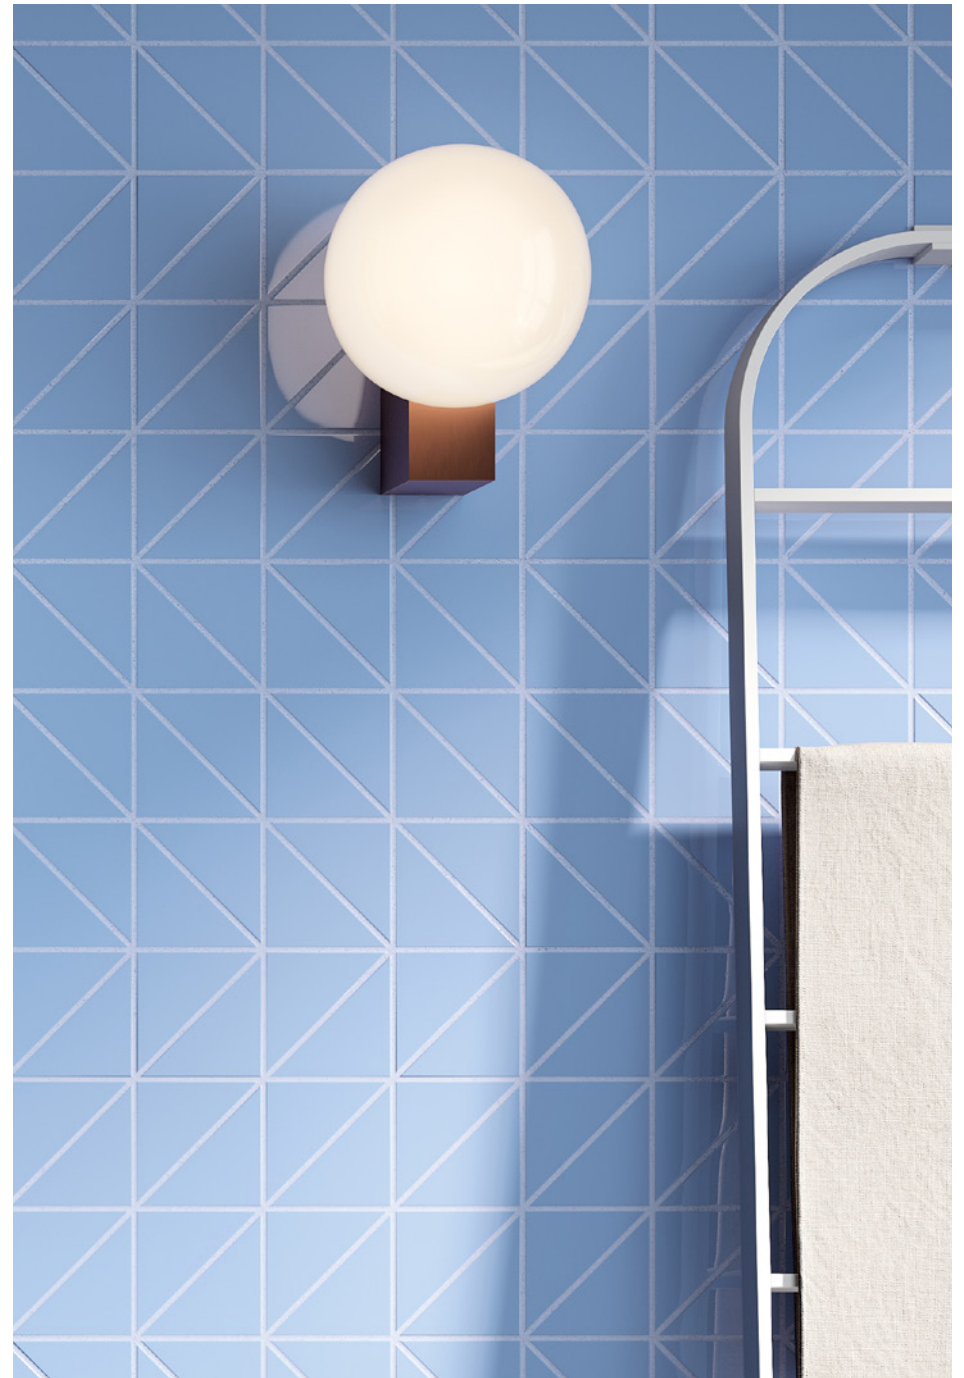

Wall: DVT 28 Triangle Mosaic Gloss




DVT 01




DVT 34



DVT 47



DVT 46



DVT 03




DVT 16




DVT 50



DVT 15



DVT 06



DVT 48




DVT 13



DVT 49



DVT 43



DVT 52



DVT 22



DVT 51



DVT 26




DVT 27



DVT 28



DVT 30



DVT 25



DVT 53



DVT 54



DVT 36




DVT 37



DVT 38

# Sizes

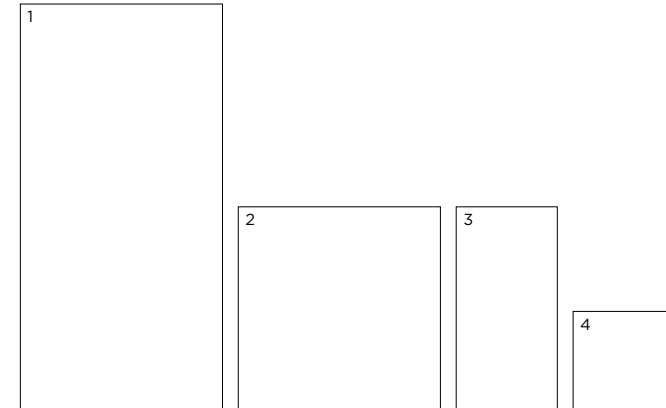

	Size (mm)	Thickness	Finish	Colour Availability
1	398.8 x 198.4 (N)	8.5	Gloss	All DVT colours
2	198.4 x 198.4 (N)	7	Gloss	All DVT colours
3	198.4 x 98.2 (N)	7	Gloss	All DVT colours
4	98.2 x 98.2 (N)	7	Gloss	All DVT colours

Swatch colours may vary from original. Samples should be requested.  
 Mosaics shown on next page. (N) Nominal size – pressed edge.


V1 - Low  
Shade Variation

**DOMUS**


service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Mosaics


Triangle Mosaic (shown below in some colours)




DVT 16




DVT 36




DVT 52




DVT 49



DVT 54



DVT 06




DVT 37




DVT 03


Mix Mosaic




DVTM 19




DVTM 11




DVTM 10



DVTM 20




DVTM 18

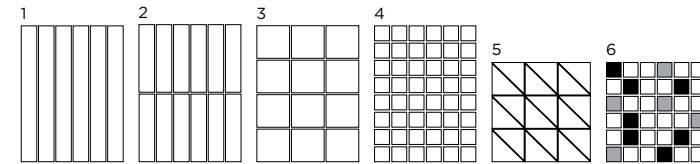

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 398.8 x 48.1 on 400 x 300 sheet	8.5	Gloss	All DVT colours
2	Mosaic 198.4 x 48.1 on 400 x 300 sheet	7	Gloss	All DVT colours
3	Mosaic 98.2 x 98.2 on 400 x 300 sheet	7	Gloss	All DVT colours
4	Mosaic 48.1 x 48.1 on 400 x 300 sheet	7	Gloss	All DVT colours
5	Triangle Mosaic 138.8 x 98.2 x 98.2 on 300 x 300 sheet	7	Gloss	All DVT colours
6	Mix Mosaic 47.5 x 47.5 on 298.7 x 298.7 sheet	7	Gloss	All DVTM colours

Swatch colours may vary from original. Samples should be requested.  
Décors shown on next page. (N) Nominal size – pressed edge.



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Décors

**Bisello (198.4 x 98.2mm)**



**DVTE 01**



**DVTE 45**



**DVTE 44**



**DVTE 36**



**DVTE 06**



**DVTE 03**



**DVTE 49**



**DVTE 38**



**DVTE 22**



**DVTE 51**


**Bisello (98.2 x 98.2mm)**



**DVTE 01**



**DVTE 38**

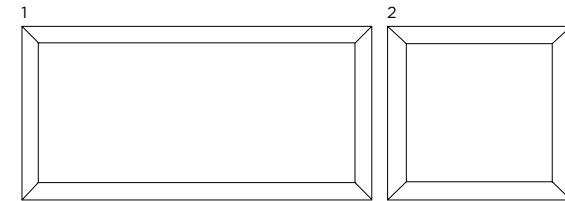

	Size (mm)	Thickness	Finish	Colour Availability
1	Bisello 198.4 x 98.2 (N)	7	Gloss	All DVTE colours
2	Bisello 98.2 x 98.2 (N)	7	Gloss	DVTE 01 & 38

Swatch colours may vary from original. Samples should be requested.  
Special pieces shown on next page. (N) Nominal size - pressed edge.

V1 - Low  
Shade Variation


**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



Wall & Bath Sides: DVT 01 Mosaic Gloss

## Special Pieces

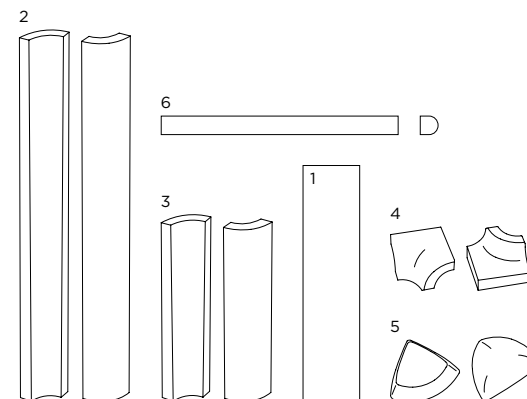

	Size (mm)	Thickness	Finish	Colour Availability
1	Strip 198.4 x 48.1 (N)	7	Gloss	All DVT colours
2	Interior/Exterior Coves 198.4 x 25 (N)	7	Gloss	All DVT colours
3	98.2 x 25 (N)			
4	Interior/Exterior Corner Fitting 25 x 25 (N)	7	Gloss	All DVT colours
5	Interior/Exterior Corner Cap 25 x 25 (N)	7	Gloss	All DVT colours
6	Stick 198.4 x 12 (N)	7	Gloss	All DVT colours

Swatch colours may vary from original. Samples should be requested.  
Line drawings not to scale. (N) Nominal size – pressed edge.

V1 - Low  
Shade Variation

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

# Trasparenze

## Technical Data

**Product Type: Glazed Ceramic (BS EN 14411 – Group BIb)**

**Use: Walls (Interior & Exterior)**

**Maximum height of 3 metres on Exterior Walls**

**Product Code: DVT / DVTE**

## DIMENSION & SURFACE QUALITY

Please be aware that the non-rectified tile is produced in four calibres, which vary slightly from the nominal size, details below.

Calibre 1: 196.1 – 197 mm & 396.1 – 397 mm

Calibre 3: 198.1 – 199 mm & 398.1 – 399 mm

Calibre 2: 197.1 – 198 mm & 397.1 – 398 mm

Calibre 4: 199.1 – 200 mm & 399.1 – 400 mm

Note: The 98.2 mm side is not calibrated and variation can be ± 0.9mm in accordance with BS EN 14411

Where there is a requirement for a specific calibre, please ensure this is quoted on all correspondence. Where a specific calibre is not requested, a random calibre will be assigned to all orders. Please ensure all tiles from the same calibre are used within the same project.

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i> )		Actual Value
		70mm ≤ N < 150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. December 2020

## PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	0.5% < Eb ≤ 3%	1.5% (Typical value) *excluding Bisello & special pieces
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 30 N/mm <sup>2</sup>	> 40 N/mm <sup>2</sup> (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 1100 N < 7.5mm thick ≥ 700 N	> 1700 N (Typical value) > 1000 N (Typical value)
Resistance to surface abrasion	BS EN ISO 10545-7	PEI	<b>Class 1:</b> DVT 28, 30, 36, 37, 38, 49 & 51 <b>Class 2:</b> DVT 13, 15, 16, 22, 27, 53, & 54 <b>Class 3:</b> DVT 03, 06, 25, 26, 34, 43, 46, 47, 48, 50 & 52 <b>Class 4:</b> DVT 01
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	< 6.9X10 <sup>-6</sup> /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant *excluding Bisello & special pieces
Chemical resistance:			
Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB min.
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB min.
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	Conforms
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Colour resistance to light exposure	DIN 51094	No noticeable colour alteration	Resistant
Recycled content			Up to 30%



**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com