

Antique Marble

Porcelain Marble



Floor: DCAE 06 Lucido

4 Colours / 2 Finishes / 3 Sizes / 2 Mosaics

Antique Marble is a stunning marble-effect porcelain range that encapsulates the purity of this ancient, natural material. This range offers a beautifully classic look thanks to striking vein patterns and subtle markings.



Shower Wall: DCAE 02 Mosaic Lucido
Wall: DCAE 02 Lucido
Floor: DCAE 02 Natural

Sizes



DCAE 01




DCAE 02



DCAE 04




DCAE 06

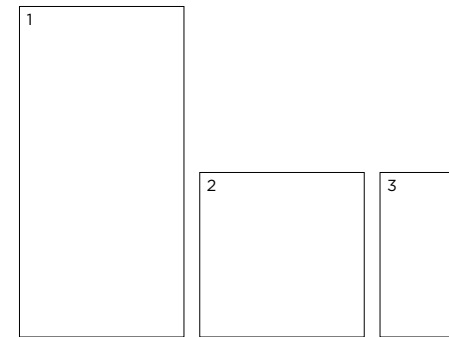

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|----------------|-----------|-------------------|----------------------------|
| 1 | 1197 x 597 (R) | 9 | Natural Lucido | All colours All colours |
| 2 | 597 x 597 (R) | 9 | Natural Lucido | All colours All colours |
| 3 | 597 x 297 (R) | 9 | Natural Lucido | All colours All colours |

(R) Rectified size - square edge with bevel. Mosaics and special pieces shown on next page. Swatch colours may vary from original. Samples should be requested.


Mosaic




DCAE 01



DCAE 02



DCAE 04




DCAE 06



Wall: DCAE 02 Mosaic Lucido

Mosaics & Special Pieces

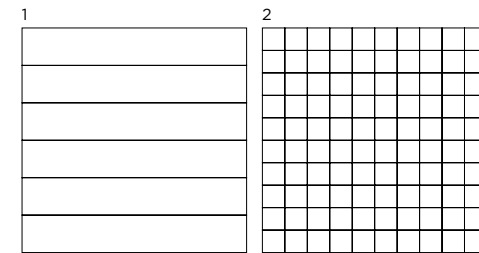

| | Size (mm) | Thickness | Finish | Colour Availability |
|---|--|-----------|-------------------|----------------------------|
| 1 | 3D Mosaic 297 x 47 on 297 x 297 sheet | 9 | Natural Lucido | All colours All colours |
| 2 | Mosaic 27 x 27 on 297 x 297 sheet | 9 | Natural Lucido | All colours All colours |
| | Plinth Skirting 597 x 46 | 9 | Natural Lucido | All colours All colours |

(R) Rectified size - square edge with bevel. Samples should be requested.



DOMUS

Antique Marble

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group Bla)

Use: Floors & Walls

Product Code: DCAE

DIMENSION & SURFACE QUALITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|----------------------------|--------------------|------------------------|---------------------------------|
| Length & width | BS EN ISO 10545-2 | ± 0.60% (max. ± 2.0mm) | ± 0.15% |
| Thickness | BS EN ISO 10545-2 | ± 5% (max. ± 0.5mm) | ± 5% |
| Edge straightness | BS EN ISO 10545-2 | ± 0.50% (max. ± 1.5mm) | ± 0.1% |
| Orthogonality (squareness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | ± 0.2% |
| Planarity (flatness) | BS EN ISO 10545-2 | ± 0.50% (max. ± 2.0mm) | ± 0.35% ± 0.2% (Grip Finish) |
| Appearance | BS EN ISO 10545-2 | > 95% | Conforms |

SLIP RESISTANCE

| Technical Characteristics | Industry Standards | Requirement | Finish |
|--|--------------------------------|---------------------------|--------|
| Areas with footwear | BS EN ISO 10545-17 (DIN 51130) | R10 from 10° to 19° | Grip |
| Areas with bare feet | DIN 51097 | B over 18° to 24° | Grip |
| Slip resistance Coefficient of friction | BS 7976-2 BS EN 16165 | Test results upon request | |

PRODUCT QUALITY & DURABILITY

| Technical Characteristics | Industry Standards | Requirement | Actual Value |
|---|---|-----------------------------------|--|
| Water absorption | BS EN ISO 10545-3 | ≤ 0.5% | 0.08% (Average value) |
| Modulus of rupture (bending strength) | BS EN ISO 10545-4 | ≥ 35 N/mm ² | 50 N/mm ² (Average value) |
| Breaking strength | BS EN ISO 10545-4 | ≥ 1300 N | 3200 N (Average value) |
| Resistance to surface abrasion | BS EN ISO 10545-7 | PEI *see classifications below | Class 3 – DCAE 02 & 06 Class 4 – DCAE 01, 03, 04 & 05 |
| Thermal shock resistance | BS EN ISO 10545-9 | No visible defects | Resistant |
| Crazing resistance | BS EN ISO 10545-11 | No visible signs | Resistant |
| Frost resistance | BS EN ISO 10545-12 | No surface alteration | Resistant |
| Chemical resistance: Low concentrations of acids & alkalis | BS EN ISO 10545-13 | No visible defects | GLA - Natural & Grip GLB - Lucido |
| Domestic chemicals & additives for swimming pools | BS EN ISO 10545-13 | GB min. | GA |
| Stain resistance | BS EN ISO 10545-14 | Min. Class 3 | Class 4-5 - Natural & Grip Class 3-4 - Lucido |
| Reaction to fire | Based on the decision 96/603/EC and its changes | A1 _{FL} /A1 | A1 _{FL} /A1 |
| Recycled content | | | DCAE 04 – 0% DCAE 01, 02 & 06 – 20.5% |

*PEI classifications

PEI 2 - Light traffic
PEI 3 - Light to moderate traffic
PEI 4 - Moderate to heavy traffic
PEI 5 - Heavy to extra heavy traffic

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

March 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com