

# Venetian Marble

*Porcelain Terrazzo*



Floor: DPVM 01 Natural

**4 Colours / 1 Finish / 3 Sizes**

Venetian Marble pays homage to the traditional appearance of Venetian terrazzo, created in high performance, resilient porcelain stoneware, conveying a sober, measured aesthetic.



Floor: DPVM 04 Natural






Floor: DPVM 03 Natural




Floor: DPVM 02 Natural



# Sizes

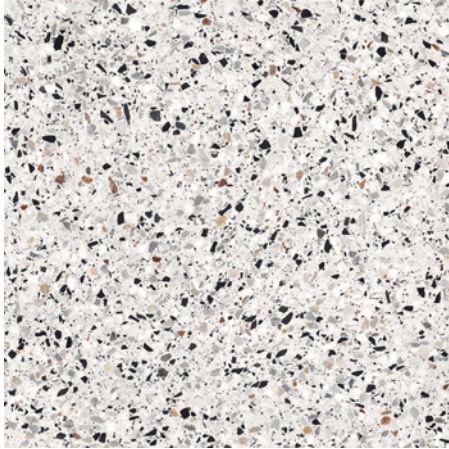

DPVM 01

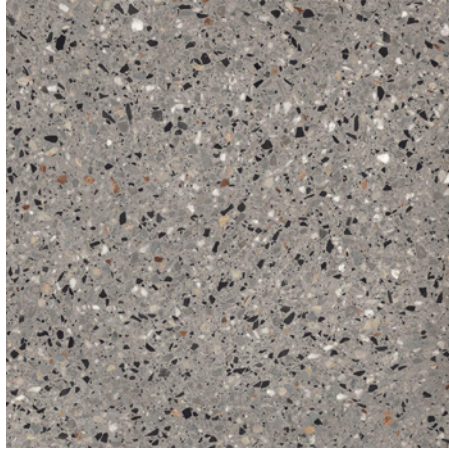


DPVM 03



DPVM 02



DPVM 04

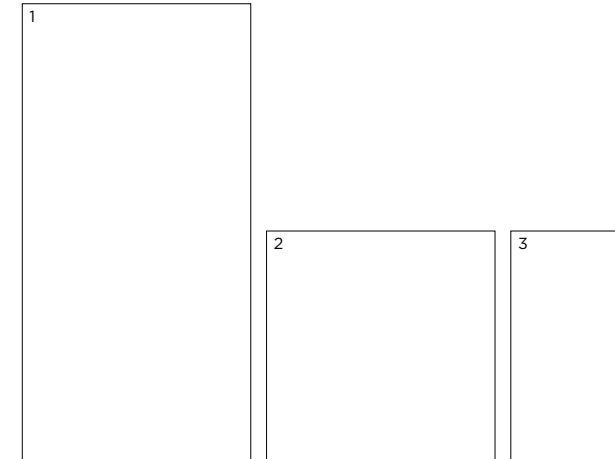

	Size (mm)	Thickness	Finish	Colour Availability
1	1192 x 595 (R)	8.5	Natural	All colours
2	595 x 595 (R)	8.5	Natural	All colours
3	595 x 296.5 (R)	8.5	Natural	All colours
	Step Tread 595 x 296.5 (R)	8.5	Natural	All colours
	Battiscopa 595 x 78 (R)	8.5	Natural	All colours

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested.

# Venetian Marble

## Technical Data

**Product Type:** Unglazed Porcelain (BS EN 14411 – Group Bla)

**Use:** Floors & Walls

**Product Code:** DPVM

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms

### SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R10 from 10° to 19°	Natural
Areas with bare feet	DIN 51097	B over 18° to 24°	Natural
Slip resistance Coefficient of friction	BS EN 16165	Test results upon request	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 1300 N	Conforms
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm <sup>3</sup>	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	7x10 <sup>-6</sup> /°C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	Conforms
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Stain resistance	BS EN ISO 10545-14	Declared value - unglazed	Resistant
Recycled content			10%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. April 2024

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com