

Les Bijoux Magnum

Lightweight Slabs / Porcelain Marble



Floor: DMAG 111 Matt

8 Colours / 2 Finishes / 4 Sizes / 2 Mosaics

Les Bijoux Magnum—the artistic allure of jewel-like surfaces with exceptional style and great expressive strength. This range is inspired by extremely rare and precious marbles that can be compared to true works of art. Refer to Les Bijoux for 9mm-thick tiles and mosaic options.




Floor: DMAG 110 Matt




Wall: DMAG 112 Glossy



DMAG 107

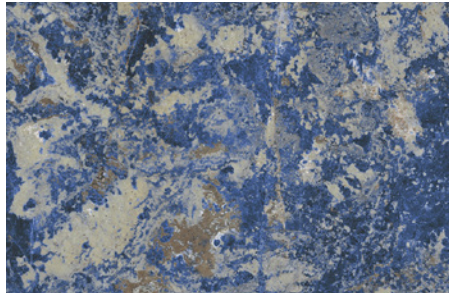

DMAG 111

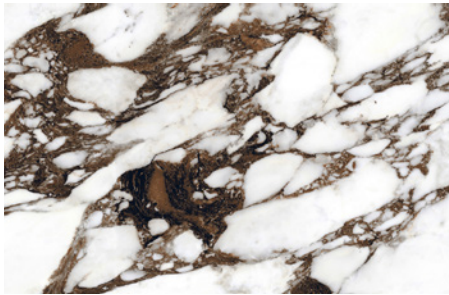


DMAG 105



DMAG 106




DMAG 110

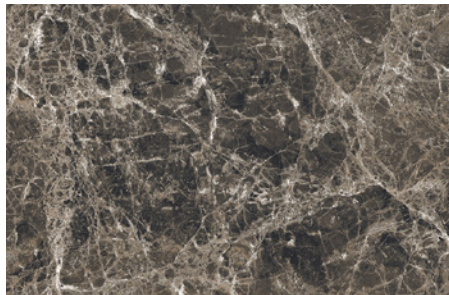

DMAG 108




DMAG 112

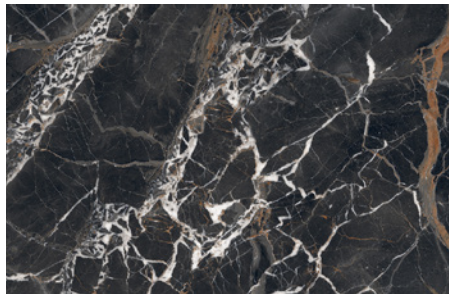


DMAG 109

Sizes

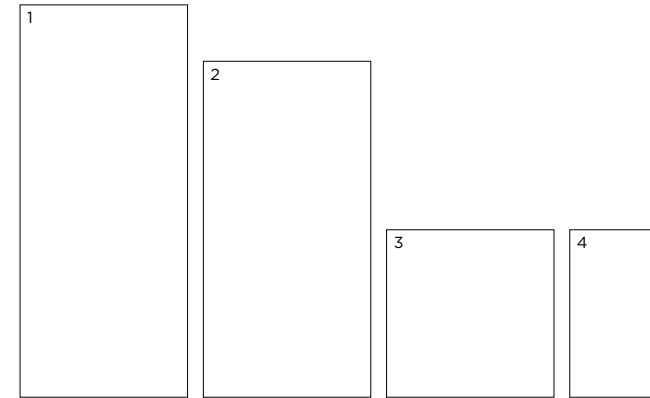

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Glossy	All colours
2	2397 x 1197 (R)	6	Matt Glossy	All colours All colours
3	1197 x 1197 (R)	6	Matt Glossy	All colours All colours
4	1197 x 597 (R)	6	Matt Glossy	All colours All colours

(R) Rectified size - square edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.




Mosaics & Special Pieces

Mosaic




DMAG 106




DMAG 105




DMAG 107



DMAG 108




DMAG 111



DMAG 110



DMAG 112



DMAG 109


Muretto Mosaic




DMAG 106




DMAG 105




DMAG 107




DMAG 108




DMAG 111




DMAG 110



DMAG 112




DMAG 109

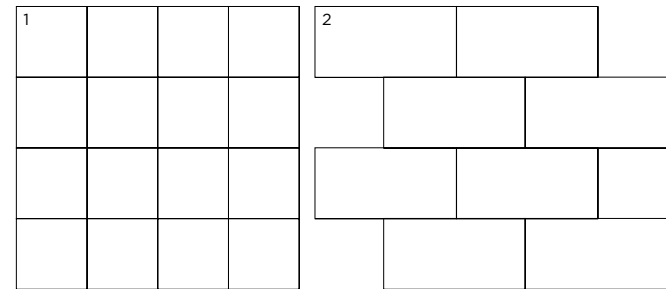

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 72 x 72 on 297 x 297 sheet	6	Matt Glossy	All colours All colours
2	Muretto Mosaic 147 x 72 on 297 x 297 sheet	6	Matt Glossy	All colours All colours
	Plinth Skirting 797 x 46	6	Matt Glossy	All colours All colours

Swatch colours may vary from original. Samples should be requested.



Les Bijoux Magnum

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0,5%	0,08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (Average value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI * see classifications below	Class 5 - DMAG 107 Class 4 - DMAG 105 & 106 Class 2 - DMAG 108, 110, 111 & 112 Class 1 - DMAG 109
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA – Matt GLB – Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 4
Reaction to fire	Based on the decision 96/603/EC and its changes		A1 _{FL} /A1
Recycled content			DMAG 105, 106 & 107 - 0% DMAG 112 - 16% DMAG 108, 109, 110 & 111 - 20.5%

*PEI classifications

- PEI 1 - Very light traffic
- PEI 2 - Light traffic
- PEI 3 - Light to moderate traffic
- PEI 4 - Moderate to heavy traffic
- PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com