

Ground Wall

Ceramic Design



3 Colours / **3** Patterns / **1** Finish / **1** Size


Ground Wall is based on the stone colours of the Loire Valley, with varying surface treatments to create alternative aesthetics. Brush has a delicate scraped quality; Tip, an illusory 3D effect; and Twist, a new chevron concept that confers a unique micro-texture.




Sizes



DLGL 01 Brush

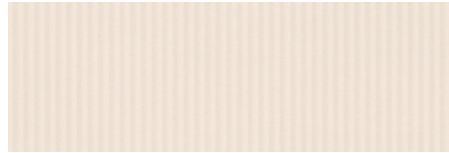


DLGL 01 Tip

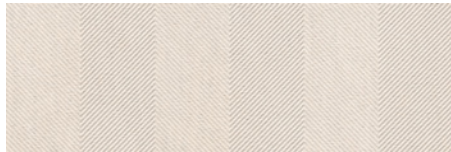


DLGL 01 Twist




DLGL 02 Brush

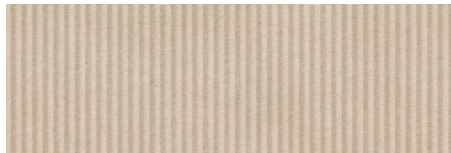


DLGL 02 Tip

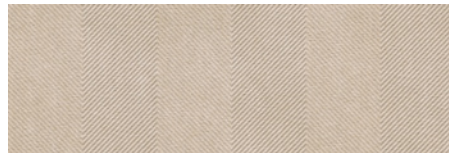


DLGL 02 Twist

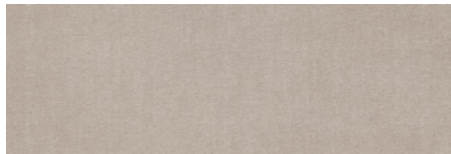

DLGL 03 Brush

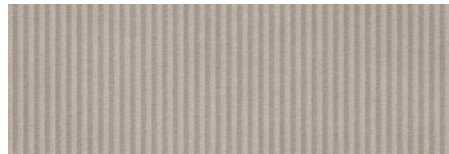

DLGL 03 Tip

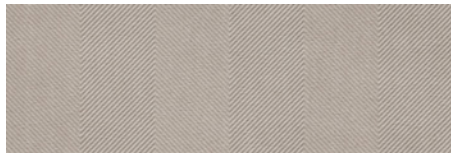

DLGL 03 Twist



	Size (mm)	Thickness	Finish	Pattern	Colour Availability
1	898 x 298 (R)	9	Natural	Brush Tip Twist	All colours All colours All colours

(R) Rectified size - squared edge with bevel. Suitable for use on internal walls only.
Swatch colours may vary from original. Samples should be requested.

Ground Wall

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DLGL

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	10% (typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	> 20 N/mm ² (typical value)
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	> 1000 N (typical value)
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			45%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com