

Terma Wall

Ceramic Design



Wall: DATMW 01 & DATMW 01 Linea Décor Matt

1 Colour / 1 Finish / 2 Sizes / 2 Décors

Terma Wall is a ceramic interpretation of classic white marble quarried in Carrara, Italy. With an aged look and smooth touch, it has been designed especially for interiors for use on walls only. Refer to Terma for its porcelain counterpart for use on walls and floors.



Left Wall: DATMW 01 Mosaic Décor Matt
Right Wall: DATMW 01 Matt

Sizes




DATMW 01



DATMW 01 Mosaic Décor



DATMW 01 Linea Décor

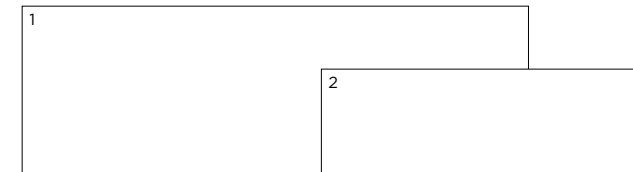

	Size (mm)	Thickness	Finish	Colour Availability
1	1200 x 400 (R)	10.8	Matt	DATMW 01
	Mosaic Décor 1200 x 400 (R)	10.8	Matt	DATMW 01
2	753 x 251 (R)	8.7	Matt	DATMW 01
	Linea Décor 753 x 251 (R)	8.7	Matt	DATMW 01

(R) Rectified size - square edge with bevel. Swatch colours may vary from original. Samples should be requested. Suitable for wall use only.

Terma Wall

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DATMW

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Conforms
Warpage	BS EN ISO 10545-2	± 0.5% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	< 9 x 10 ⁻⁶ /°C
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm ≥ 600 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			29%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. August 2020



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com