

Stripes

Ceramic Design



11 Colours / 3 Patterns / 2 Finishes / 1 Size

Stripes is a ceramic tile range with three distinct surface options: Stripes, Transition & Liso XL. The Transition pieces are used to create a seamless segue between the Stripes and Liso XL surfaces. Tiles can be laid vertical or horizontally, creating feature walls delineated with bands of light and shadows.

Wall: DWOS 07 Stripes Matt





Wall: DWOS 03 Stripes Matt
Shower Walls: DWOS 11 Liso XL Matt




Wall: DWOS 12 Stripes & Transition Matt / DWOS 07 Liso XL Matt




Sizes



Liso XL

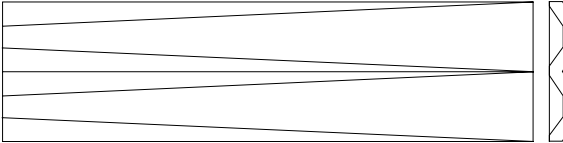


Transition

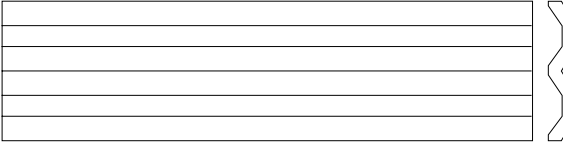

Stripes

	Size (mm)	Thickness	Pattern	Colour Availability
1	300 x 74 (N)	8 15.5 15.5	Liso XL Transition Stripes	All colours*


(N) Nominal size – pressed edge. Wall only tiles in three patterns (surface options). *All colours are available in a Matt finish, except DWOS 02 which is produced in a Glossy finish only. Swatch colours may vary from original. Samples should be requested.






Wall: DWOS 06 Stripes Matt

Special Pieces



	Size (mm)	Thickness	Finish	Colour Availability
1	Edge XL 300 x 74 (N)	8	Matt	All colours*
2	Edge Corner 74 x 74 (N)	8	Matt	All colours*

(N) Nominal size – pressed edge. *All special pieces are available in a Matt finish, except DWOS 02 which is produced in a Glossy finish only. Swatch colours may vary from original. Samples should be requested.



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Stripes

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)
Use: Walls (Internal only)
Product Code: DWOS

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 10% (max. ± 0.5mm)	Varies depending on design
Edge straightness	BS EN ISO 10545-2	± 0.30% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness): Centre curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Varies depending on design
Edge curvature	BS EN ISO 10545-2	+ 0.5% (max. + 2.0mm) - 0.3% (max. - 1.5mm)	Varies depending on design
Warpage	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 12 N/mm²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 7.5mm thick ≥ 600 N	Conforms
Linear thermal expansion coefficient	BS EN ISO 10545-8	Declared value	≤ 7 x 10 ⁻⁶ / °C (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			62%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. December 2019