

# Etoile Magnum

*Lightweight Slabs / Porcelain Marble*




**5 Colours / 2 Finishes / 4 Sizes / 2 Mosaics**

Etoile Magnum is inspired by a selection of new and rare marbles with a strong decorative impact originating from distant geographical areas. Refer to Etoile for 9mm-thick tiles and mosaics.







DMAG 92

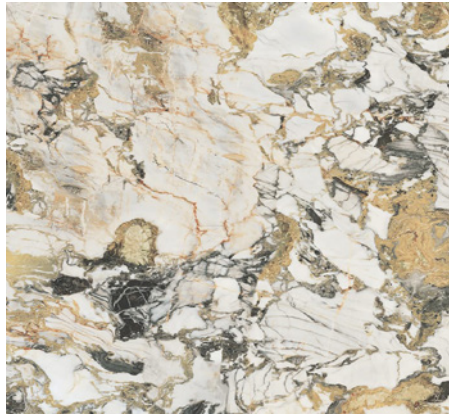

DMAG 94

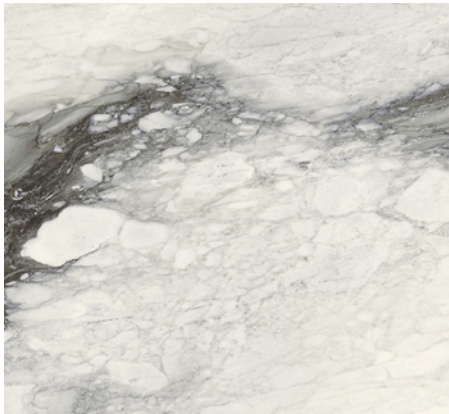

DMAG 93

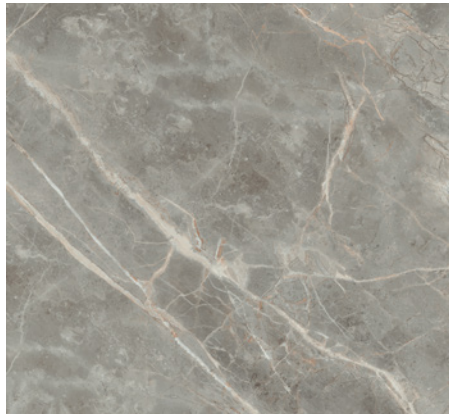


DMAG 95



DMAG 97

## Sizes

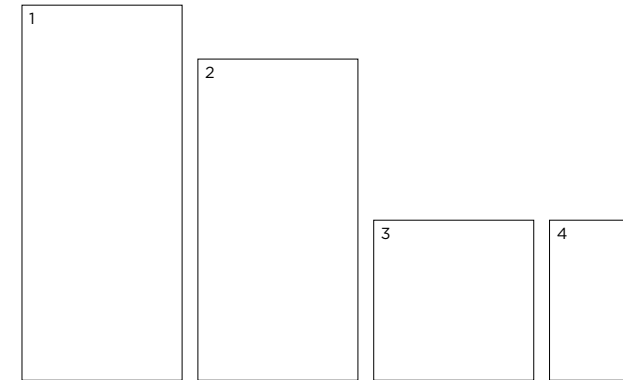

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Matt Glossy	DMAG 92, 93 & 95 DMAG 92, 93 & 95
2	2397 x 1197 (R)	6	Matt Glossy	All colours All colours
3	1197 x 1197 (R)	6	Matt Glossy	All colours All colours
4	1197 x 597 (R)	6	Matt Glossy	All colours All colours

(R) Rectified size – square edge with bevel. Mosaics shown on next page.  
Swatch colours may vary from original. Samples should be requested.

Mosaic



DMAG 92




DMAG 93



DMAG 94



DMAG 95




DMAG 97

Muretto Mosaic



DMAG 92




DMAG 93



DMAG 94




DMAG 95



DMAG 97

# Mosaics & Special Pieces

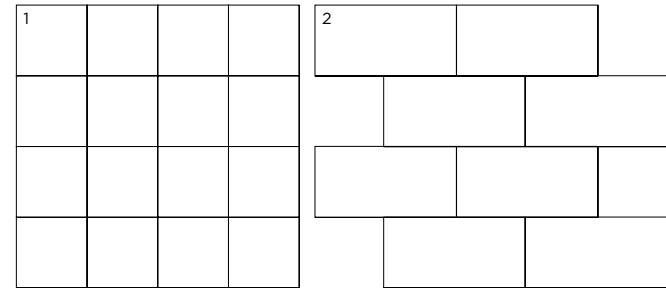

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 72 x 72 on 297 x 297 sheet	6	Matt Glossy	All colours All colours
2	Muretto Mosaic 147 x 72 on 297 x 297 sheet	6	Matt Glossy	All colours All colours
	Skirting 597 x 46 (R)	6	Matt Glossy	All colours All colours

(R) Rectified size – square edge with bevel. Swatch colours may vary from original. Samples should be requested.



# Etoile Magnum

## Technical Data

**Product Type:** Glazed Porcelain (BS EN 14411 – Group BIa)

**Use:** Floors & Walls

**Product Code:** DMAG

### DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

### SLIP RESISTANCE

Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

### PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm <sup>2</sup>	52 N/mm <sup>2</sup> (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (Average value)
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	DMAG 92 & 97 - Class 4 DMAG 93, 96 & 98 - Class 2 DMAG 94 - Class 3 DMAG 95 Matt - Class 3 DMAG 95 Glossy - Class 2
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA - Matt GLB - Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Matt - Class 4-5 Glossy - Class 3-4
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 <sub>FL</sub> /A1	A1 <sub>FL</sub> /A1
Recycled content			DMAG 92, 93 & 94 - 0% DMAG 95 - 16% DMAG 97 - 20.5%

#### \*PEI classifications

PEI 2 - Light traffic

PEI 3 - Light to moderate traffic

PEI 4 - Moderate to heavy traffic

PEI 5 - Heavy to extra heavy traffic



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale March 2023.

**DOMUS**

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com