

Uno

—
Porcelain Wood



Floor: DLUN 06 Soft Textured

6 Colours / 2 Finishes / 3 Sizes / 2 Mosaics

Inspired by solid oak, Uno accurately recreates the grain, knots and grooves of wood. This porcelain range achieves a distinctive relief that conveys the warmth of its natural counterpart. Suitable for both indoor and outdoor use—a unique option for blurring the lines between both areas and achieving visual continuity.



DLUN 01 Soft Textured



Wall: DLUN 05 Soft Textured



Floor: DLUN 03 Soft Textured



DLUN 01




DLUN 02



DLUN 03



DLUN 04

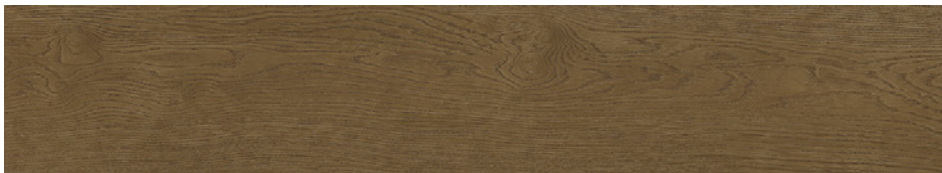


DLUN 05



DLUN 06

Sizes

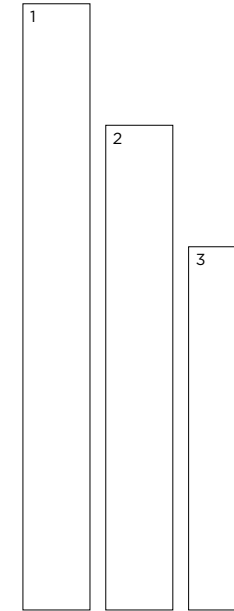


	Size (mm)	Thickness	Finish	Colour Availability
1	1998 x 223 (R)	9	Soft Textured	All colours
2	1598 x 223 (R)	9	Soft Textured	All colours
3	1198 x 198 (R)	9	Soft Textured Anti-Slip	All colours All colours

(R) Rectified size - squared edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

Mosaics

Mosaic 298 x 30mm

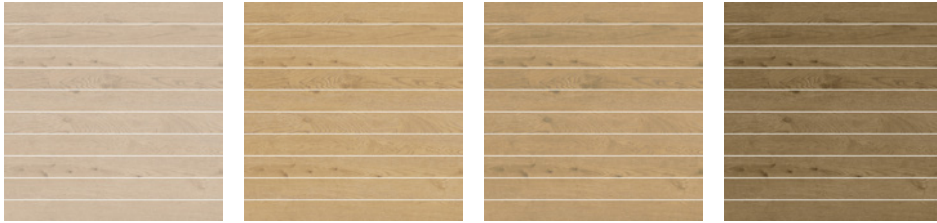

DLUN 01

DLUN 02

DLUN 03

DLUN 04



DLUN 05

DLUN 06

Mosaic 898 x 50mm



DLUN 01

DLUN 02



DLUN 03

DLUN 04



DLUN 05

DLUN 06



	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 298 x 30 on 298 x 298 sheet	9	Soft Textured	All colours
2	Mosaic 898 x 50 on 898 x 298 sheet	9	Soft Textured	All colours

Swatch colours may vary from original. Samples should be requested.

Uno

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DLUN

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size N)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.9mm	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%		Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R10 from 10° to 19° R11 from 19° to 27° R12 from 27° to 35° R13 over 35°	Natural Anti-Slip
Areas with bare feet	DIN 51097	A over 12° to 18° B over 18° to 24° C over 24°	Natural Anti-Slip
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Dec. 2020

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	< 0.5%
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	> 52 N/mm ²
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	> 2,500 N
Resistance to surface abrasion (glazed tiles)	BS EN ISO 10545-7	PEI *see classifications below	3
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Complies
Crazing resistance	BS EN ISO 10545-11	No visible signs	Complies
Frost resistance	BS EN ISO 10545-12	No surface alteration	Complies
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3 – glazed Declared value - unglazed	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	
Recycled content			30%

***PEI classifications**
 PEI 1 – Very light traffic
 PEI 2 - Light traffic
 PEI 3 - Light to moderate traffic
 PEI 4 - Moderate to heavy traffic
 PEI 5 - Heavy to extra heavy traffic



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com