


Metro Lounge 2.0

Ceramic Colours



33 Colours / 2 Finishes / 5 Sizes

Inspired by the glazed ceramic tiles of the Paris Metro and the London Underground, these wall tiles with their distinctive bevelled and uniform flat surface are a timeless classic, effortlessly transforming any interior room into a chic and stylish space.

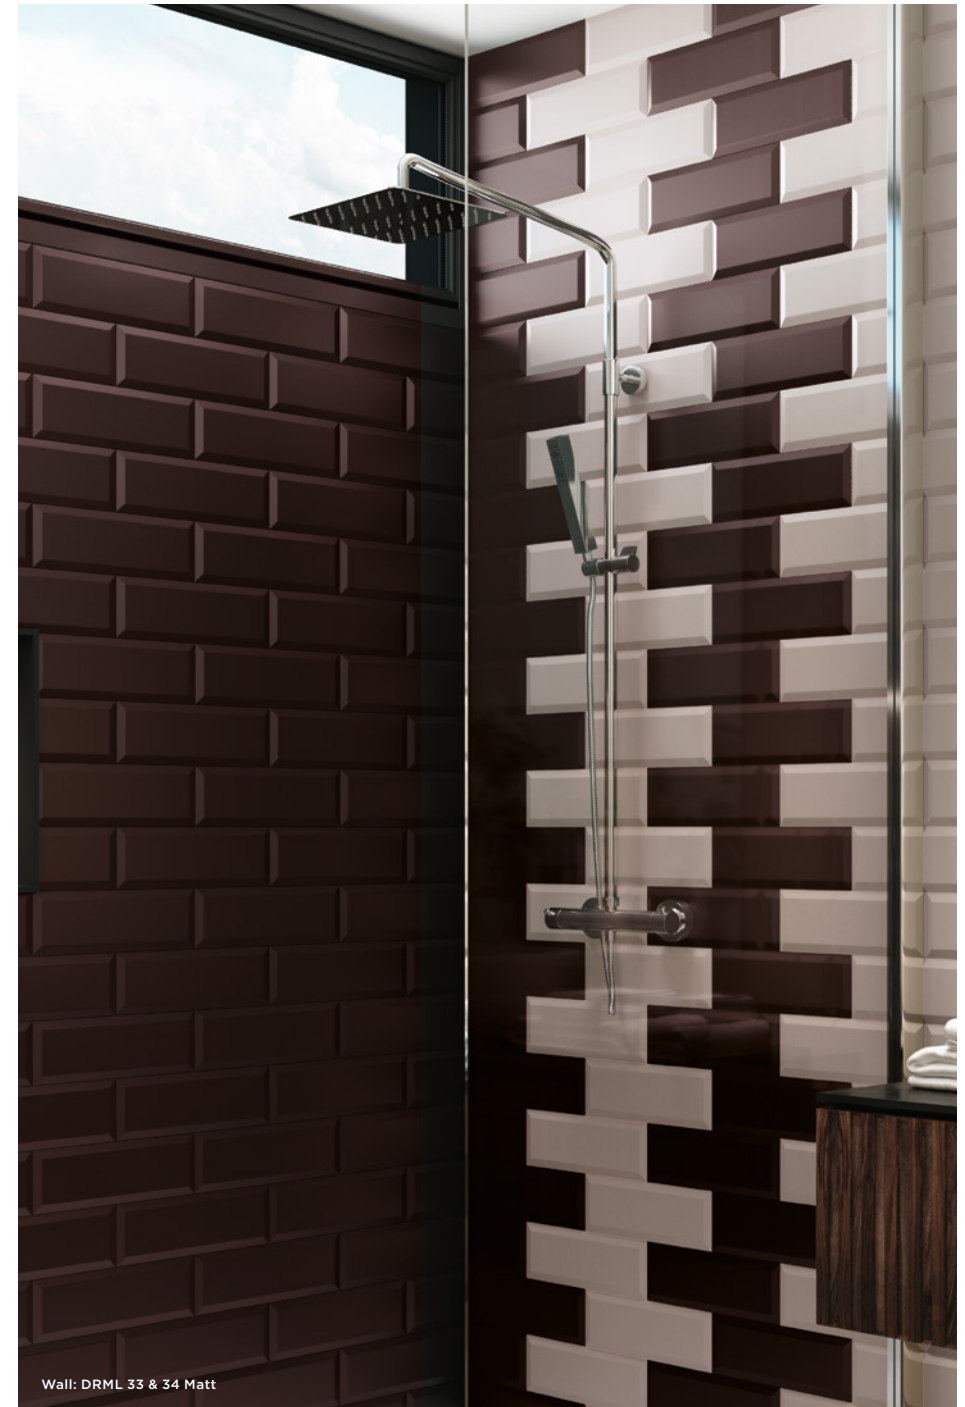




Wall: DRML 24 Gloss



Wall: DRML 01, 03 & 08 Gloss



Sizes

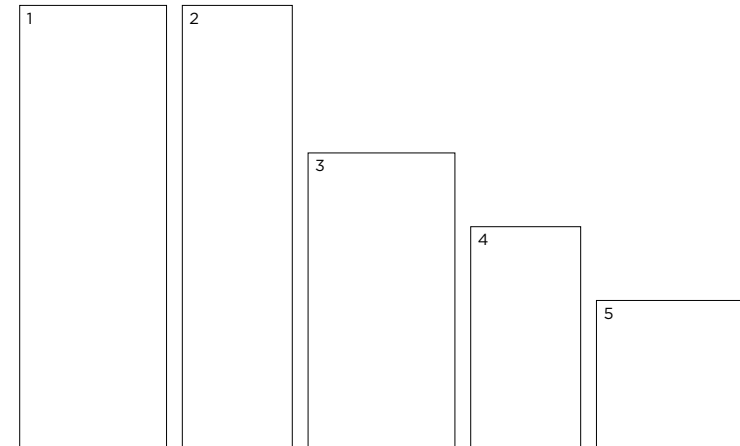

	Size (mm)	Thickness	Finish	Colour Availability
1	300 x 100 (N)	6	Matt Gloss	DRML 01, 08, 28, 33 & 34 DRML 01-06, 08, 13-18, 20, 21, 24-28, 30-34 & 36-38
2	300 x 75 (N)	6	Gloss	DRML 01 & 08
3	200 x 100 (N)	6	Matt Gloss	DRML 01 & 08 DRML 01-06, 08, 13-20, 22-31, 35 & 38
4	150 x 75 (N)	6	Matt Gloss	DRML 01 & 08 DRML 01, 03, 04, 06, 08, 14, 18-20, 22, 24, 29, 31, 32 & 38
5	100 x 100 (N)	6	Matt Gloss	DRML 01 only DRML 01 only

(N) Nominal size – pressed edge. For wall use only.

Switch colours may vary from original. Samples should be requested.

V1 - Low
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Metro Lounge 2.0

Technical Data

Product Type: Glazed Ceramic (BS EN 14411 – Group BIII)

Use: Walls (Internal only)

Product Code: DRML

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement (for nominal size <i>N</i>)		Actual Value
		70mm ≤N<150mm	N ≥ 150mm	
Length & width	BS EN ISO 10545-2	± 0.75mm	± 0.50% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm	± 10% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.5mm	± 0.30% (max. ± 1.5mm)	Conforms

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	> 10%	15.1% (Typical value)
Breaking strength	BS EN ISO 10545-4	≥ 200 N	Conforms
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible defects	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GHA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1	A1
Recycled content			0%



All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. Feb 2022

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com