

Gubi

Porcelain Stone



Floor: DLGF 03 Natural

4 Colours / 2 Finishes / 7 Sizes / 4 Mosaics

Combines timelessness and trend with a sober style that can create minimalist environments. Gubi is inspired by the typical micro-cement polishing and is smooth to the touch, combining a simple and elegant design with high functionality. It can be combined with Gubi Wall, Gubi Slim and Gubi Wall Slim.



Floor: DLGF 01 Natural



Wall: DLGF 04 Muretto Mosaic Natural



Floor: DLGF 02 Natural

Sizes



DLGF 01




DLGF 02



DLGF 04



DLGF 03

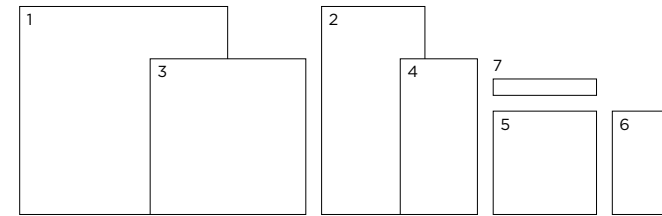


	Size (mm)	Thickness	Finish	Colour Availability
1	1198 x 1198 (R)	9	Natural Natural Grip	All colours All colours
2	1198 x 598 (R)	9	Natural Natural Grip	All colours All colours
3	898 x 898 (R)	9	Natural Natural Grip	All colours All colours
4	898 x 448 (R)	9	Natural Natural Grip	All colours All colours
5	598 x 598 (R)	9	Natural Natural Grip	All colours All colours
6	598 x 298 (R)	9	Natural Natural Grip	All colours All colours
7	598 x 98 (R)	9	Natural Natural Grip	All colours All colours

(R) Rectified size - squared edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.

Mosaics

Mosaic 25 x 25mm

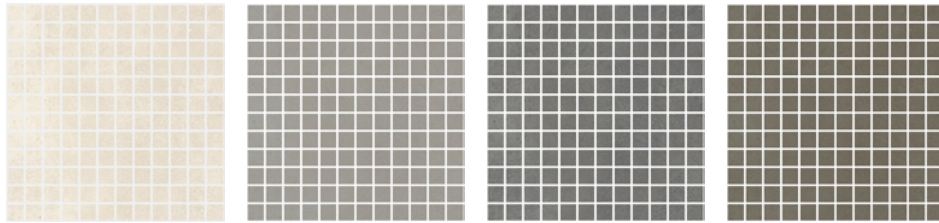


DLGF 01

DLGF 02

DLGF 03

DLGF 04

Mosaic 50 x 50mm

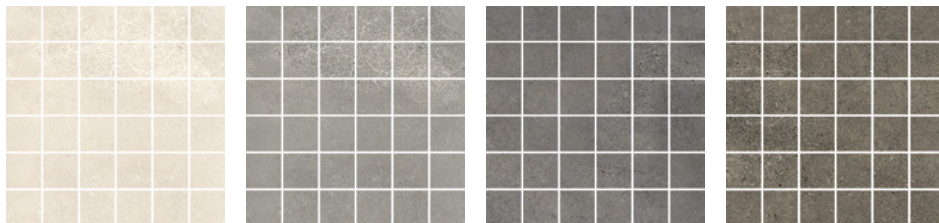


DLGF 01

DLGF 02

DLGF 03

DLGF 04

Mosaic 150 x 30mm

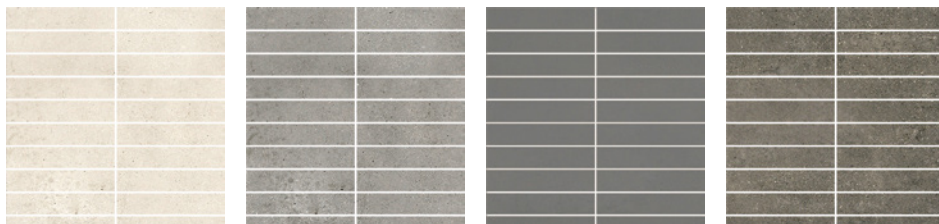


DLGF 01

DLGF 02

DLGF 03

DLGF 04

Muretto Mosaic

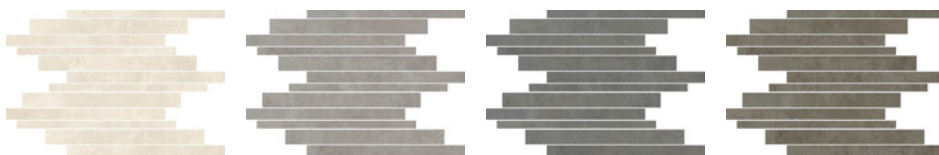


DLGF 01

DLGF 02

DLGF 03

DLGF 04

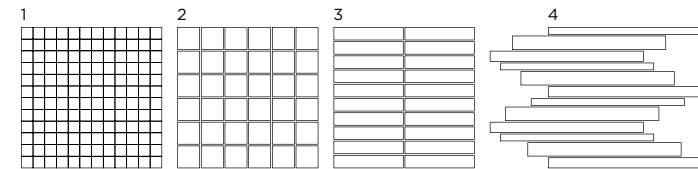

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 25 x 25 on 298 x 298 sheet	9	Natural Natural Grip	All colours All colours
2	Mosaic 50 x 50 on 298 x 298 sheet	9	Natural Natural Grip	All colours All colours
3	Mosaic 150 x 30 on 298 x 298 sheet	9	Natural Natural Grip	All colours All colours
4	Muretto Mosaic on 298 x 298 sheet	9	Natural Natural Grip	All colours All colours

Switch colours may vary from original. Samples should be requested. Special pieces shown on next page.

V2 - Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com



Wall: DLGF 01 & DLGF 01 Mosaic Natural

Special Pieces

	Size (mm)	Thickness	Finish	Colour Availability
1	Skirting 1198 x 48	9	Natural Natural Grip	All colours All colours
2	Skirting 898 x 48	9	Natural Natural Grip	All colours All colours
3	Skirting 598 x 48	9	Natural Natural Grip	All colours All colours
4	Step Tread 1198 x 333 x 30	9	Natural Natural Grip	All colours All colours
5	Step Tread 898 x 333 x 30	9	Natural Natural Grip	All colours All colours
6	Step Tread 598 x 333 x 30	9	Natural Natural Grip	All colours All colours
7	Angle Step Tread 1198 x 333 x 30	9	Natural Natural Grip	All colours All colours
8	Angle Step Tread 898 x 333 x 30	9	Natural Natural Grip	All colours All colours
9	Angle Step Tread 598 x 333 x 30	9	Natural Natural Grip	All colours All colours

Swatch colours may vary from original. Samples should be requested.

V2 - Moderate
Shade Variation

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com

Gubi

Technical Data

Product Type: Glazed Porcelain (BS EN 14411 - Group Bla)

Use: Floors & Walls

Product Code: DLGF

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement	Finish
Areas with footwear	BS EN ISO 10545-17 (DIN 51130)	R9 from 3° to 10° R11 from 19° to 27°	Natural Natural Grip
Areas with bare feet	DIN 51097	A over 12° to 18° C over 24°	Natural Natural Grip
Slip resistance Coefficient of friction	BS 7976-2	Test results upon request	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	Conforms
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	Conforms
Breaking strength	BS EN ISO 10545-4	≥ 1300 N	Conforms
Resistance to surface abrasion	BS EN ISO 10545-7	PEI *See classification below	Class 3
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Crazing resistance	BS EN ISO 10545-11	No visible signs	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	GLA
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	GB min.	GA
Stain resistance	BS EN ISO 10545-14	Min. Class 3	Class 5
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			30%

* PEI classifications

PEI 2 – Light traffic
PEI 3 – Light to moderate traffic
PEI 4 – Moderate to heavy traffic
PEI 5 – Heavy to extra heavy traffic

