

Cromatica

Lightweight Slabs / Porcelain Design



Wall: DCDCR 01, 02 & 04 Natural
Floor: DCDCR 05 Natural

7 Colours / 2 Finishes / 4 Sizes / 1 Chain Set

Cromatica elicits a sensitive and thoughtful consideration of the dominance of pure colour. The glazed porcelain sheets provide an array of seemingly infinite shades, where pastel colours mix softly in variations of intensity.

Design Andrea Trimarchi & Simone Farresin

CEDIT




Wall: DCDCR 01 & 03 Shiny
Floor: DCDCR 05 Shiny


Wall: DCDCR 07 Shiny
Floor: DCDCR 05 Shiny




Wall: DCDCR 09 Chain Set Shiny

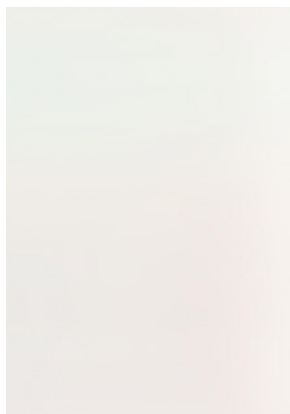

DCDCR 01

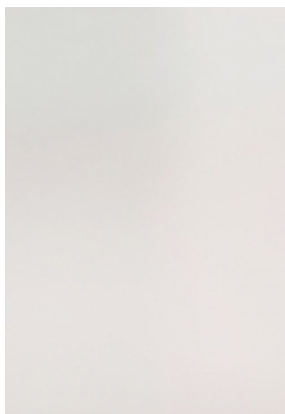


DCDCR 04

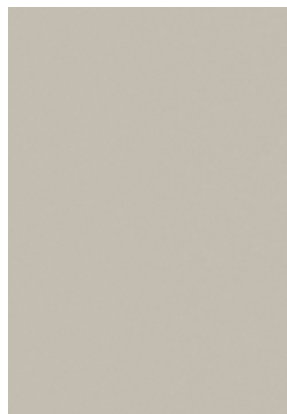

DCDCR 05



DCDCR 02

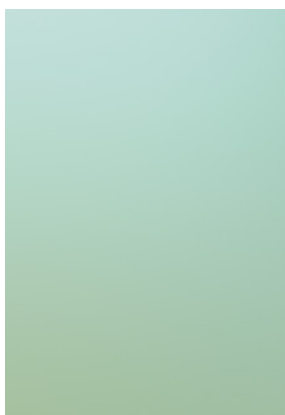

DCDCR 03




DCDCR 06



DCDCR 07


Sizes

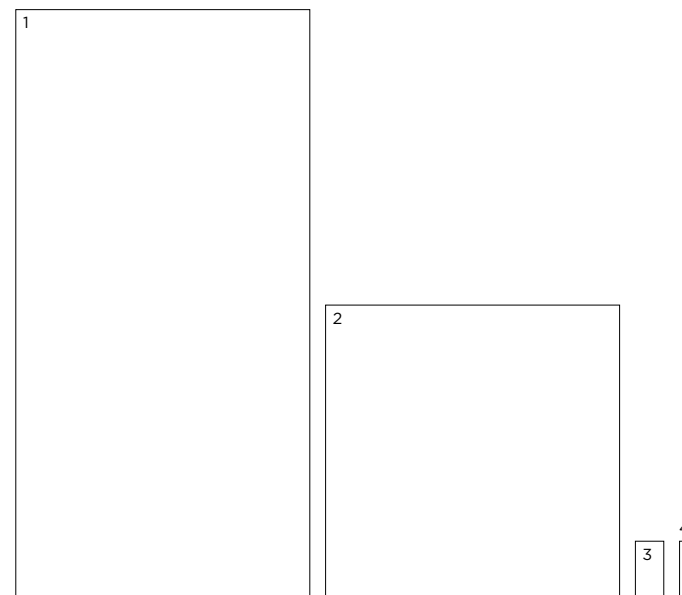


	Size (mm)	Thickness	Finish	Colour Availability
1	2397 x 1197 (R)	6	Natural Shiny	DCDCR 01, 02, 03, 04, 06 & 07 DCDCR 01, 02, 03, 04, 06 & 07
2	1197 x 1197 (R)	6	Natural Shiny	DCDCR 05 DCDCR 05
3	238 x 118 (R)	6	Natural Shiny	DCDCR 01, 02, 03, 04, 06 & 07 DCDCR 01, 02, 03, 04, 06 & 07
4	238 x 58 (R)	6	Natural Shiny	DCDCR 01, 02, 03, 04, 06 & 07 DCDCR 01, 02, 03, 04, 06 & 07

(R) Rectified size - square edge with bevel. Chain set options shown on next page. Swatch colours may vary from original. Samples should be requested.


Chain Set

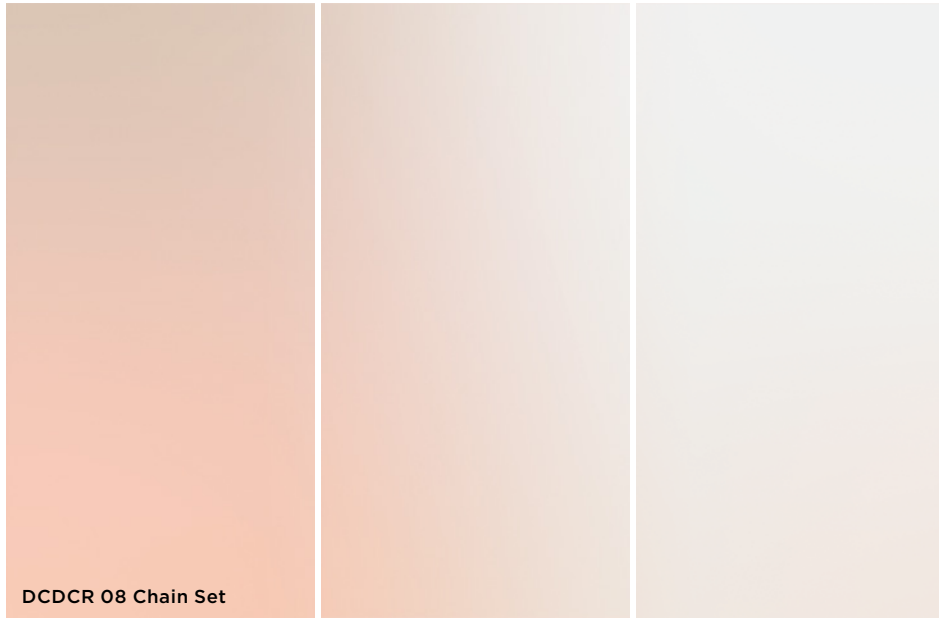

DCDCR 08 Chain Set

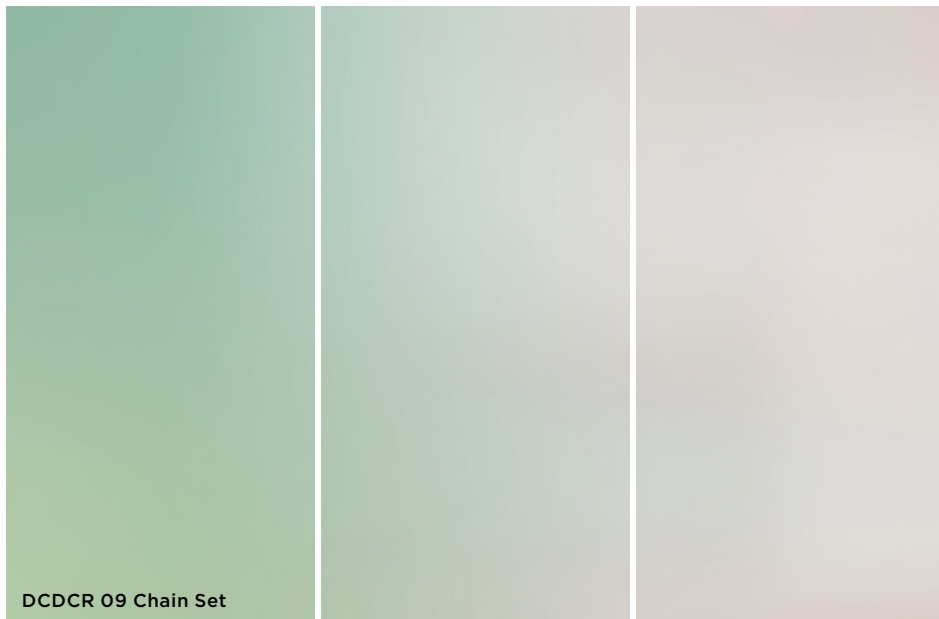

DCDCR 09 Chain Set

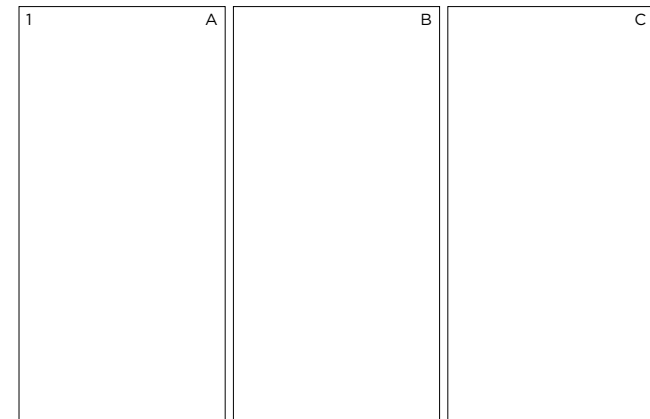

	Size (mm)	Thickness	Finish	Colour Availability
1	Chain Set A, B & C 2397 x 1197 (R)	6	Natural Shiny	DCDCR 08 & 09 DCDCR 08 & 09

(R) Rectified size – square edge with bevel.
Swatch colours may vary from original. Samples should be requested.

Cromatica

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DCDCR

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.9mm ± 0.60% (max. ± 2.0mm)	Conforms
Thickness	BS EN ISO 10545-2	± 0.5mm ± 5% (max. ± 0.5mm)	Conforms
Edge straightness	BS EN ISO 10545-2	± 0.75mm ± 0.50% (max. ± 1.5mm)	Conforms
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.75mm ± 0.50% (max. ± 2.0mm)	Conforms
Planarity (flatness)	BS EN ISO 10545-2	± 0.75mm ± 0.50% (max. ± 2.0mm)	Conforms
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Technical Characteristics	Industry Standards	Requirement
Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0,08% (Typical value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (Typical value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140mm ³ (Typical value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA/ULB
High concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	UHA/UHB
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB/GB min.	UA
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			3%



* Greenguard for DCDCR 05 only

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale. March 2023

DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com