

Stones & More Magnum

Lightweight Slabs / Porcelain Marble



Wall & Floor: DMAG 31 Smooth

3 Colours / 2 Finishes / 4 Sizes / 2 Mosaics

Stones & More Magnum is a beautiful porcelain slab range that replicates the finest Italian marbles. The designs are inspired by a variety of natural landscapes. View Ashlar for coordinating 9mm-thick tiles.




Wall & Floor: DMAG 32 Glossy



DMAG 32




DMAG 31

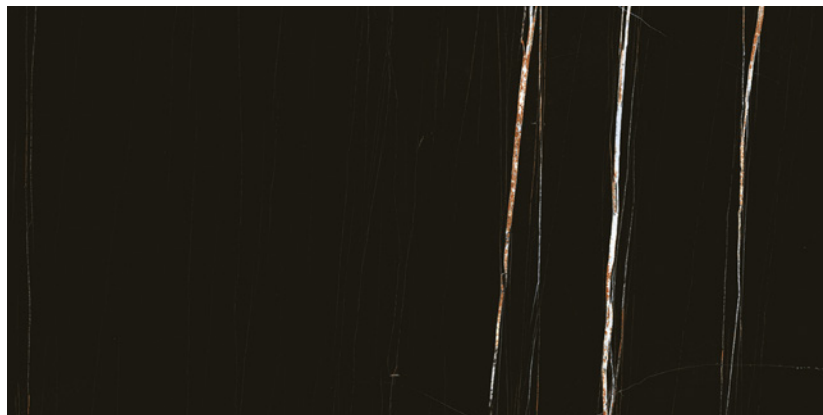


DMAG 69

Sizes

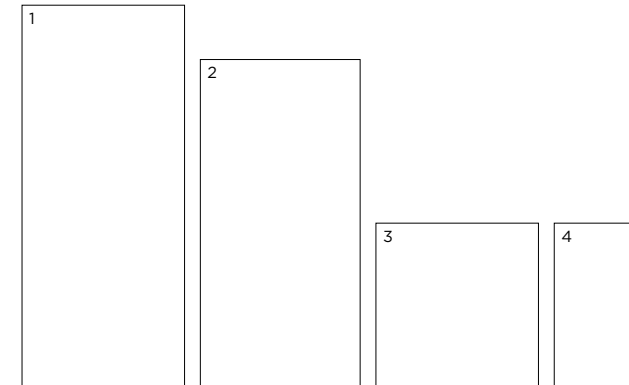

	Size (mm)	Thickness	Finish	Colour Availability
1	2797 x 1197 (R)	6	Smooth Glossy	DMAG 31 & 32 DMAG 31 & 32
2	2397 x 1197 (R)	6	Smooth Glossy	DMAG 31 & 32 All colours
3	1197 x 1197 (R)	6	Smooth Glossy	DMAG 31 & 32 All colours
4	1197 x 597 (R)	6	Smooth Glossy	DMAG 31 & 32 All colours

(R) Rectified size - square edge with bevel. Mosaics shown on next page.
Swatch colours may vary from original. Samples should be requested.



Mosaics

Mosaic



DMAG 32



DMAG 31



DMAG 69


Muretto Mosaic




DMAG 32



DMAG 31




DMAG 69

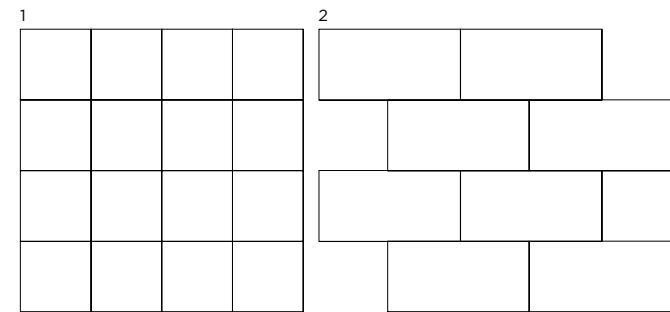

	Size (mm)	Thickness	Finish	Colour Availability
1	Mosaic 75 x 75 on 297 x 297 sheet	6	Smooth Glossy	DMAG 31 & 32 All colours
2	Muretto Mosaic 150 x 75 on 297 x 297 sheet	6	Smooth Glossy	DMAG 31 & 32 All colours

Swatch colours may vary from original. Samples should be requested.



Stones & More Magnum

Technical Data

Product Type: Unglazed Porcelain (BS EN 14411 – Group BIa)

Use: Floors & Walls

Product Code: DMAG

DIMENSION & SURFACE QUALITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Length & width	BS EN ISO 10545-2	± 0.60% (max. ± 2.0mm)	± 0.15%
Thickness	BS EN ISO 10545-2	± 5% (max. ± 0.5mm)	± 5%
Edge straightness	BS EN ISO 10545-2	± 0.50% (max. ± 1.5mm)	± 0.1%
Orthogonality (squareness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Planarity (flatness)	BS EN ISO 10545-2	± 0.50% (max. ± 2.0mm)	± 0.2%
Appearance	BS EN ISO 10545-2	> 95%	Conforms

SLIP RESISTANCE

Slip resistance	BS 7976-2	Test results upon request
Coefficient of friction	BS EN 16165	

PRODUCT QUALITY & DURABILITY

Technical Characteristics	Industry Standards	Requirement	Actual Value
Water absorption	BS EN ISO 10545-3	≤ 0.5%	0.08% (Average value)
Modulus of rupture (bending strength)	BS EN ISO 10545-4	≥ 35 N/mm ²	52 N/mm ² (Average value)
Breaking strength	BS EN ISO 10545-4	≥ 700 N	1350 N (Average value)
Resistance to deep abrasion (unglazed tiles)	BS EN ISO 10545-6	≤ 175 mm ³	140 mm ³ (Average value)
Thermal shock resistance	BS EN ISO 10545-9	No visible defects	Resistant
Frost resistance	BS EN ISO 10545-12	No surface alteration	Resistant
Chemical resistance: Low concentrations of acids & alkalis	BS EN ISO 10545-13	No visible defects	ULA – Natural ULB – Smooth & Glossy
Domestic chemicals & additives for swimming pools	BS EN ISO 10545-13	UB min.	UA
Stain resistance	BS EN ISO 10545-14	Declared value	Class 3 – Smooth & Glossy Class 4 – Natural
Reaction to fire	Based on the decision 96/603/EC and its changes	A1 _{FL} /A1	A1 _{FL} /A1
Recycled content			DMAG 31, 32 & 85 – 0% DMAG 69, 86 & 87 – 20.5%

All test results are based upon current test data provided by the manufacturer and are provided in good faith. Domus Group cannot be held responsible for any variation in the test data due to changes in manufacture or material characteristics. Errors & omissions excepted. Please refer to Domus Group Terms & Conditions of Sale.

March 2023



DOMUS

service@domusgroup.com | t: 020 8481 9500 | domusgroup.com